

FreeSpace[®] Integrated Zone Amplifier / Zone Amplifier

Models IZA 2120-HZ, IZA 2120-LZ,
ZA 2120-HZ and ZA 2120-LZ



CONTENTS

| | |
|---|---------|
| Safety Information | 3 |
| Warranty | 3 |
| Product Information | 4-20 |
| Manufactured Versions | 4 |
| Electrostatic Discharge Sensitive (ESDS) Device Handling | 21 |
| Part List Notes | 21 |
| Packaging Part List, IZA 2120-HZ and IZA 2120-LZ Amplifiers (refer to Figure 1) | 22 |
| Figure 1. IZA 2120-HZ and IZA 2120-LZ Packing View | 22 |
| Packaging Part List, ZA 2120-HZ and ZA 2120-LZ Systems (refer to Figure 2) | 23 |
| Figure 2. ZA 2120-HZ and ZA 2120-LZ Packing View | 23 |
| Main Part List, IZA 2120-HZ and IZA 2120-LZ Amplifiers (refer to Figure 3) | 24-25 |
| Figure 3. IZA 2120-HZ and IZA 2120-LZ Amplifiers Exploded View | 25 |
| Main Part List, ZA 2120-HZ and ZA 2120-LZ Amplifiers (refer to Figure 4) | 26 |
| Figure 4. ZA 2120-HZ and ZA 2120-LZ Amplifiers Exploded View | 27 |
| Figure 5. IZA 2120-HZ Chassis View | 28 |
| Figure 6. IZA 2120-HZ Wiring Diagram | 28 |
| Figure 7. ZA 2120-HZ Chassis View | 29 |
| Figure 8. ZA 2120-HZ Wiring Diagram | 29 |
| Figure 9. IZA 2120-LZ Chassis View | 30 |
| Figure 10. IZA 2120-LZ Wiring Diagram | 30 |
| Figure 11. ZA 2120-LZ Chassis View | 31 |
| Figure 12. ZA 2120-LZ Wiring Diagram | 31 |
| Electrical Part lists | 32-103 |
| IZA 2120-HZ and ZA 2120-HZ SMPS PCB Assembly | 32-39 |
| IZA 2120-HZ and ZA 2120-HZ Amplifier PCB Assembly | 40-46 |
| FreeSpace IZA 2120-HZ and ZA 2120-HZ LED & Output PCB Assembly | 46 |
| IZA 2120-HZ DSP PCB Assembly | 47-55 |
| IZA 2120-HZ Front PCB Assembly | 55-57 |
| IZA 2120-HZ Rear Panel PCB Assembly | 58-63 |
| ZA 2120-HZ Rear Panel PCB Assembly | 64-69 |
| IZA 2120-LZ and ZA 2120-LZ SMPS PCB Assembly | 70-76 |
| IZA 2120-LZ and ZA 2120-LZ Amplifier PCB Assembly | 77-79 |
| IZA 2120-LZ and ZA 2120-LZ LED & Output PCB Assembly | 79 |
| IZA 2120-LZ DSP PCB Assembly | 80-88 |
| IZA 2120-LZ Front Panel PCB Assembly | 88-90 |
| IZA 2120-LZ Rear Panel PCB Assembly | 91-96 |
| ZA 2120-LZ Rear Panel PCB Assembly | 97-103 |
| Disassembly Procedures | 104-106 |
| Test Procedures | 107-124 |
| IZA 2120-LZ Tests | 107-111 |
| IZA 2120-HZ Tests | 112-117 |
| ZA 2120-LZ Tests | 118-120 |
| ZA 2120-HZ Tests | 121-123 |
| Hi-Pot and Ground Bond Tests | 124 |
| Software Update Procedure | 125-126 |
| Service Manual Revision History | 127 |

SAFETY INFORMATION

1. Parts that have special safety characteristics are identified by the  symbol on schematics or by special notes on the parts list. Use only replacement parts that have critical characteristics recommended by the manufacturer.

2. Refer to the Hi-Pot and Ground Bond test information located on page 124 of this service manual.

The Hi-Pot test **MUST** be performed on any unit where the repair required removal of the amplifier's top cover.

The ground bond test **MUST** be performed on any unit where the repair affects the ground wire connection inside the chassis.

These tests **MUST** be performed to ensure that the product is safe to return to the customer after a repair.

CAUTION: The Bose® FreeSpace® Integrated Zone Amplifier and Zone Amplifier contain no user-serviceable parts. To prevent warranty infractions, refer servicing to warranty service stations or factory service.

PROPRIETARY INFORMATION

THIS DOCUMENT CONTAINS PROPRIETARY INFORMATION OF BOSE CORPORATION WHICH IS BEING FURNISHED ONLY FOR THE PURPOSE OF SERVICING THE IDENTIFIED BOSE PRODUCT BY AN AUTHORIZED BOSE SERVICE CENTER AND SHALL NOT BE REPRODUCED OR USED FOR ANY OTHER PURPOSE.

WARRANTY

The Bose FreeSpace Integrated Zone Amplifier and Zone Amplifier are covered by a 5-year limited warranty.

Product Information

Overview:

The IZA/ZA 2120-HZ/LZ amplifier are new Pro installed business music systems, consisting of four separate chassis. The product family is similar to the current IZA amplifier product line, but whereas those amps are half-width chassis, the IZA/ZA 2120-HZ/LZ chassis are full width.

Of the four chassis, two have internal DSP with switch selections for Bose® Professional speakers (Hi-Z Master and Lo-Z Master) as well as a paging input along with 2 channels of amplifier output. The other 2 chassis are slave amplifier units, Hi-Z and Lo-Z also. They have only 2 analog inputs and are meant to be driven by one of the master amp versions.

120W x 2, Supported Hi-z and Lo-z speakers. The Marketing Names for these products are: IZA 2120-HZ, ZA 2120-HZ, IZA 2120-LZ and ZA 2120-LZ.

PCB Usage Per Amplifier Version

All four amplifier versions share a similar architecture. As a result, some of the PCB assemblies are common across product versions.

In the IZA 2120-HZ and ZA 2120-HZ, the SMPS PCB, Amplifier PCB and the LED PCB are common. The Rear Panel PCB is different for these two amplifiers. The ZA 2120-HZ does not have a DSP PCB or a Front Panel PCB.

In the IZA 2120-LZ and ZA 2120-LZ, the SMPS PCB, Amplifier PCB and the LED PCB are common. The Rear Panel PCB is different for these two amplifiers. The ZA 2120-LZ does not have a DSP PCB or a Front Panel PCB.

Manufactured Versions

| Material Master # | Description | Region |
|-------------------|-------------------------------------|---------------|
| 719782-0420 | FREESPACE IZA 2120-LZ No Power cord | No Power Cord |
| 719782-1420 | FREESPACE IZA 2120-LZ 120V NA | 120V US |
| 719782-2420 | FREESPACE IZA 2120-LZ 230V EU | 230V EU |
| 719782-3420 | FREESPACE IZA 2120-LZ 100V JPN | 100V JPN |
| 719782-4420 | FREESPACE IZA 2120-LZ 230V UK | 230V UK |
| 719782-5420 | FREESPACE IZA 2120-LZ 240V AUS | 240V AU |
| 722196-0420 | FREESPACE ZA 2120-LZ No Power Cord | No Power Cord |
| 722196-1420 | FREESPACE ZA 2120-LZ 120V NA | 120V US |
| 722196-2420 | FREESPACE ZA 2120-LZ 230V EU | 230V EU |
| 722196-3420 | FREESPACE ZA 2120-LZ 100V JPN | 100V JPN |
| 722196-4420 | FREESPACE ZA 2120-LZ 230V UK | 230V UK |
| 722196-5420 | FREESPACE ZA 2120-LZ 240V AUS | 240V AU |
| 719782-0410 | FREESPACE IZA 2120-HZ No Power cord | No Power Cord |
| 719782-1410 | FREESPACE IZA 2120-HZ 120V NA | 120V US |
| 719782-2410 | FREESPACE IZA 2120-HZ 230V EU | 230V EU |
| 719782-3410 | FREESPACE IZA 2120-HZ 100V JPN | 100V JPN |
| 719782-4410 | FREESPACE IZA 2120-HZ 230V UK | 230V UK |
| 719782-5410 | FREESPACE IZA 2120-HZ 240V AUS | 240V AU |
| 722196-0410 | FREESPACE ZA 2120-HZ No Power cord | No Power Cord |
| 722196-2410 | FREESPACE ZA 2120-HZ 230V EU | 230V EU |
| 722196-1410 | FREESPACE ZA 2120-HZ 120V NA | 120V US |
| 722196-3410 | FREESPACE ZA 2120-HZ 100V JPN | 100V JPN |
| 722196-4410 | FREESPACE ZA 2120-HZ 230V UK | 230V UK |
| 722196-5410 | FREESPACE ZA 2120-HZ 240V AUS | 240V AU |

Product Information

FreeSpace® IZA 2120-HZ Integrated Zone Amplifier



Product Description

For background/foreground music and paging applications, Bose® FreeSpace® IZA 2120-HZ integrated zone amplifier elevates the audio experience when using FreeSpace® loudspeakers. Optimized for commercial applications, FreeSpace IZA amplifiers feature selectable Loudspeaker EQ to enrich audio quality, Opti-voice® paging for clear speech intelligibility while providing seamless transitions and Dynamic EQ that ensures full and balanced music at any volume level.

Key Features

- **True two-zone capability** provides two independent outputs that each support volume/source selection remotes, EQ, tone controls, and paging/auxiliary routing options.
- **Opti-voice® paging** equalizes the vocal frequency range for clear speech intelligibility while providing seamless transitions.
- **Dynamic EQ** ensures full and balanced music at any volume level.
- **Independent Loudspeaker EQ per output** enriches audio quality and simplifies connection to Bose® loudspeakers: FreeSpace® 3 systems, FS3 subwoofer, DS 16, DS 40 and DS 100.
- **Dual remotes** support optional volume/source selection for independent, or combined, zone control which eliminates the need for bulky, inefficient, and sound-altering 70/100V in-line volume controls.
- **Expansion-ready connectivity** with FreeSpace ZA amplifiers to drive additional zones.
- **Reliable 2 x 120 W Class-D amplification** optimized for 70/100V high-impedance applications.
- **Intuitive feature setup** enables the amplifier to be configured without a PC for remote, paging, auxiliary input/output and automatic standby options.
- **Auto-Standby feature** allows the amplifier to consume less power when not in use.
- **Simplified front panel interface** provides end users with tone, source selection and master volume controls as well as a connection to mobile sources via a 3.5 mm connector.
- **Remote muting** allows the amplifier to be muted via a centralized control system.

Applications

- Designed for a wide range of applications, including:
- Retail stores
- Restaurants and bars
- Hospitality venues
- Conference centers
- Schools
- Auxiliary zones

Product Information

FreeSpace® IZA 2120-HZ Integrated Zone Amplifier

Technical Specifications

| | | | |
|--------------------------------|---|---------------------|-------------------|
| Power Rating | | | |
| Amplifier Power | 2 x 120 W @ 70/100V | | |
| Audio Performance | | | |
| Frequency Response | 55 Hz - 20 kHz (+0/-3 dB, @ 1 W reference 1 kHz) | | |
| THD+N | ≤ 0.3 % (at rated power) | | |
| Channel Separation (Crosstalk) | ≤ -58 dBu (below rated power, 1 kHz) | | |
| Dynamic Range | 88 dB | | |
| Integrated DSP | | | |
| A/D and D/A Converters | 24-bit / 48 kHz | | |
| Processing Functions | Loudspeaker EQ, Bass-boost, Opti-voice, Dynamic equalization | | |
| Loudspeaker Presets | FreeSpace FS3/HPF, DS 16, DS 40, DS 100, and FS3B | | |
| Audio Latency | 10.4 ms (any input to speaker output or aux output) | | |
| Audio Inputs | | | |
| | Line Inputs | Page Input | Auxiliary Input |
| Input Channels | 2 unbalanced, 2 balanced | 1 balanced mic/line | 1 unbalanced line |
| Connectors | Stereo RCA, 5-pin Euroblock | 4-pin Euroblock | 1/8" (3.5mm) TRS |
| Input Range | -8 dBu to 22 dBu | -58 dBu to 12 dBu | -60 dBu to -1 dBu |
| Adjustment Range | 0 dB to -30 dB | 0 dB to +50 dB | Fixed |
| Input Impedance | 20 kΩ | 2 kΩ | 20 kΩ |
| Maximum Input Level | 22 dBu | 12 dBu | -1 dBu |
| Sensitivity | -8 dBu | n/a | -3 dBu |
| Nominal Input Level | 4 dBu | -38 dBu | -8 dBu |
| Audio Outputs | | | |
| | Amplifier Outputs | Auxiliary Output | |
| Outputs | 2 | 1 unbalanced | |
| Connectors | 2-pin inverted Euroblock | Stereo RCA | |
| Output Impedance | n/a | 400 Ω | |
| Nominal Output Level | 2 x 120 W @ 70/100V | 2 dBu | |
| Indicators and Controls | | | |
| Power LED | Solid blue indicates power is on, blinking blue indicates standby mode | | |
| Input Signal Clip LED | Green indicates input signal is within -37 dBu to 11 dBu, red indicates signal is over 11 dBu, master level set to 5 | | |
| Output Signal Clip LED | Green indicates output signal is within -46 dBFS to -2 dBFS, red indicates signal is over -2 dBFS, approximately 80 W/channel, for each output 120 watts is 0 dBFS | | |
| Controls, Front Panel | Power On/Off, Input Select (A/B), Treble/Bass Tone Controls (x2), Master Level | | |
| Controls, Rear Panel | Amplifier Mode DIP switches, Loudspeaker EQ preset selector, Input Gain (A/B/Page), Output trims, Remote (x2) | | |
| Electrical | | | |
| Mains Voltage | 100 VAC – 240 VAC (±10%, 50/60 Hz) | | |
| AC Power Consumption | 26 W (Standby), 300 W (Max) | | |
| Mains Connector | Standard IEC (C14) | | |
| Maximum Inrush Current | 12.6 Amps (230 VAC / 50 Hz), 6.6 Amps (120 VAC / 60 Hz) | | |
| Overload Protection | High temperature, output short, excessively low or high AC line voltage | | |
| Physical | | | |
| Dimensions | 1.7" H x 19.0" W x 12.8" D (44 mm x 483 mm x 324 mm) | | |
| Shipping Weight | 12.0 lb (5.4 kg) | | |
| Net Weight | 9.0 lb (4.1 kg) | | |
| Cooling System | Single fan creates continuous left-to-right air flow | | |
| General | | | |
| Inputs (Control) | Remote input for Volume Control with A/B Select user interface (PC041967), Volume Control user interface (PC041966), Mute input control via a normally open contact closure | | |

Product Information

FreeSpace® IZA 2120-HZ Integrated Zone Amplifier



- 1 POWER switch – ON/OFF AC power.
- 2 Power LED – Solid blue LED indicates the unit is ON. Blinking blue LED indicates the unit is in standby mode.
- 3 INPUT SIGNAL LED – LED is green from -37 dBu to 11 dBu, LED goes red over 11 dBu. MASTER LEVEL set to 5.
- 4 OUTPUT LIMIT LED – LED is green from -46 dBFS to -2 dBFS, LED goes red over -2 dBFS, approximately 80 W/channel. For each output 120 watts is 0 dBFS.
- 5 AUX INPUT – $1/8"$ (3.5 mm) stereo line-level input connector. A cable insertion mutes INPUT A and INPUT B for priority override. Pages can still be made from the PAGE INPUT. AUX INPUT does not have any gain adjustment, therefore, all gain adjustments must be done from the external source device.
- 6 INPUT A/B Switch – Selects either INPUT A or INPUT B on the rear panel when the rear panel A/B SELECT DIP switch is set to FRONT.
- 7 TREBLE/BASS Controls – Allows tonal adjustments of both outputs simultaneously. First order shelving filters provide a ± 6 dB adjustment at 7 kHz and above (TREBLE) and 100 Hz and below (BASS). They have a slope of approximately 6 dB/octave.
- 8 Master level Control – Controls the overall system volume for both the loudspeakers and the AUX OUTPUT when the AUXOUTPUT DIP switch is set to VARIABLE. If the AUX OUTPUT DIP switch is set to FIXED, the AUX OUTPUT maintains maximum level. When using a REMOTE volume connection, the front panel MASTER LEVEL control becomes disabled.



- 1 INPUT A/B – Balanced and unbalanced line-level input connectors. Each input is summed to mono.
- 2 INPUT GAIN – Allows for 0 dB to -30 dB of adjustment to each INPUT A/B.
- 3 PAGE INPUT – Euroblock mic/line input that supports dynamic microphones with voice activation (VOX) or a trigger contact closure for use with push-to-talk (PTT) microphones.
- 4 MUTE – Contact closure connection that upon trigger (short) will mute all outputs (including AUX OUTPUT).
- 5 PAGE INPUT GAIN – Allows for 0 dB to $+50$ dB of gain control of PAGE INPUT signal.
- 6 EQ – Provides loudspeaker equalization presets: FS3/HPF, DS 16, DS 40, DS 100 and FS3B. The FS3/HPF is the flat setting. Use this setting for loudspeakers that are not Bose or that do not require EQ. The HPF is set at 55 Hz.
- 7 PAGE INPUT THRESHOLD – Adjusts the level at which the VOX PAGE INPUT signal causes other inputs to be lowered. A 10 dB adjustment range lifts the page trigger level away from the noise floor to prevent false triggers. At minimum setting, a -70 dBu signal will trigger a VOX page. At maximum setting, a -60 dBu signal will trigger a VOX page. When in PTT page mode this adjustment is not active.
- 8 DIP Switches – A bank of switches to set the amplifier configuration. All switches set to the left position is the standard configuration.
- 9 AUX OUTPUT – Variable or fixed, unbalanced line-level output signal for use with ZA zone amplifiers or for routing the signal to additional audio equipment.
- 10 70V/100V – Changes the outputs from 70V to 100V.
- 11 REMOTE – Input connector for either a Bose® volume control with A/B switch user interface accessory (PC 041967) or a Bose volume control user interface accessory (PC 041966).
- 12 OUTPUT 1/OUTPUT 2 TRIM – Allows for up to 40 dB attenuation of the individual loudspeaker outputs relative to the master level.
- 13 OUTPUT – Two inverted 2-pin Euroblock connectors for loudspeaker connections. Outputs are not bridgeable.
- 14 AC Mains receptacle – AC line voltage input.



Product Information

FreeSpace® IZA 2120-HZ Integrated Zone Amplifier


AC Current Draw and Thermal Dissipation Information

| IZA 2120-HZ, AC Current Draw and Thermal Dissipation | | | | | | | |
|--|--|--------------------------|---------------------------------|---------------------------------|--------------------------|---------|----------|
| Test Signal & Power Level | Load Configuration (Both IZA channels driven) | Total Audio Output, W | 120VAC 60Hz. Line Current, A | 230VAC 50Hz. Line Current, A | Thermal Dissipation, Max | | |
| | | | | | Watts | BTU/hr. | kCal/hr. |
| Power On, Idling | | 0 | 0.27 | 0.17 | 40 | 136 | 34 |
| 1/8th Rated Power IEC65 Bandlimited Pink Noise | 70V / Ch | 30 | 0.55 | 0.30 | 69 | 235 | 59 |
| 6 dB Crest Factor DS 16 EQ Enabled | 100V / Ch | 30 | 0.61 | 0.33 | 76 | 259 | 65 |
| 1/3rd Rated Power IEC65 Bandlimited Pink Noise | 70V / Ch | 80 | 1.15 | 0.60 | 138 | 471 | 119 |
| 6 dB Crest Factor DS 16 EQ Enabled | 100V / Ch | 80 | 1.15 | 0.64 | 147 | 502 | 127 |

Mechanical Diagrams

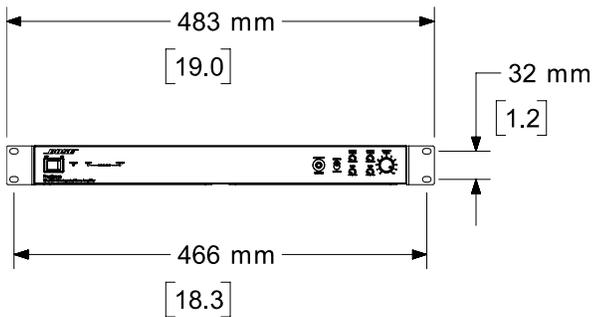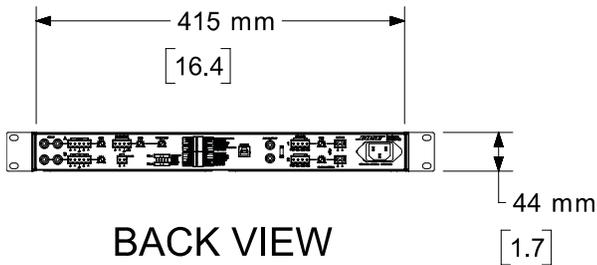

RIGHT VIEW

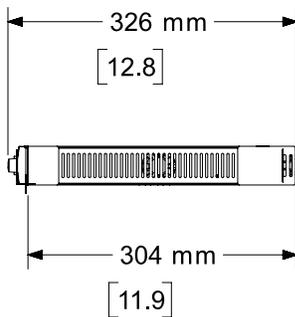

Safety and Regulatory Compliance

The FreeSpace IZA 2120-HZ integrated zone amplifier complies with CE requirements and is UL listed according to UL60065 (7th edition) and CAN/CSA C22.2 No. 60065-03; CB approved, according to IEC60065 (7th edition), including group and national differences. This model also complies with FCC Part 15B Class A (2003), EN55103-1 (1997), EN55103-2 (1996), and CISPR13 (2003) requirements.

Product Codes

FreeSpace IZA 2120-HZ integrated zone amplifier

| | |
|--------------|-------------|
| 120V – US | 719782-1410 |
| 230V – EU | 719782-2410 |
| 100V – Japan | 719782-3410 |
| 230V – UK | 719782-4410 |
| 240V – AU | 719782-5410 |

Accessories

Volume control user interface (PC041966)

Volume control with A/B switch user interface (PC041967)

Product Information

FreeSpace® ZA 2120-HZ Zone Amplifier



Product Description

The Bose® FreeSpace® ZA 2120-HZ zone amplifier is designed to provide basic amplification and sound system expansion when using front-end Bose products such as FreeSpace® integrated zone amplifiers and ControlSpace® engineered sound processors.

Key Features

- **Reliable 2 x 120 W Class-D amplification** optimized for 70/100V high-impedance applications.
- Dual remotes support optional volume adjustment for independent, or combined, zone control which eliminates the need for bulky, inefficient, and sound-altering 70/100V in-line volume controls.
- Expansion-ready connectivity with FreeSpace® IZA amplifiers when additional sources and loudspeaker processing is required.
- Intuitive feature setup enables the amplifier to be configured without a PC for remote, input, output and automatic standby options.
- Auto-Standby feature allows the amplifier to consume less power when not in use.
- Remote muting allows the amplifier to be muted via a centralized control system.

Applications

- Designed for a wide range of applications, including:
- Retail stores
- Restaurants and bars
- Hospitality venues
- Conference centers
- Schools
- Auxiliary zones

Product Information

FreeSpace® ZA 2120-HZ Zone Amplifier

Technical Specifications


| | |
|--------------------------------|--|
| Power Rating | |
| Amplifier Power | 2 x 120 W @ 70/100V |
| Audio Performance | |
| Frequency Response | 55 Hz - 20 kHz (+0/-3 dB, @ 1 W reference 1 kHz) |
| THD+N | ≤ 0.3 % (at rated power) |
| Channel Separation (Crosstalk) | -58 dBu (below rated power, 1 kHz) |
| Dynamic Range | 88 dB |
| Audio Inputs | |
| Input Channels | 1 unbalanced, 1 balanced |
| Connectors | Stereo RCA, 5-pin Euroblock |
| Input Range | -8 dBu to 22 dBu |
| Input Impedance | 20 kΩ |
| Maximum Input Level | 22 dBu |
| Nominal Input Level | 4 dBu |
| Audio Outputs | |
| Outputs | 2 |
| Connectors | 2-pin inverted Euroblock |
| Nominal Output Level | 2 x 120 W @ 70/100V |
| Indicators and Controls | |
| Power LED | Solid blue indicates power is on, blinking blue indicates standby mode |
| Input Signal Clip LED | Green indicates input signal is within -37 dBu to 11 dBu, red indicates signal is over 11 dBu |
| Output Signal Clip LED | Green indicates output signal is within -46 dBFS to -2 dBFS, red indicates signal is over -2 dBFS, approximately 80 W/channel, for each output 120 watts is 0 dBFS |
| Controls, Front Panel | Power On/Off |
| Controls, Rear Panel | Auto Standby: On/Off switch, Input: Dual/Summed switch, Remote 1 Control: Zone 1/Zone 1+2 switch, Output Voltage: 70/100V switch, Mute, Output trims, Remote (x2) |
| Electrical | |
| Mains Voltage | 100 VAC - 240 VAC (±10%, 50/60 Hz) |
| AC Power Consumption | 23 W (Standby), 300 W (Max) |
| Mains Connector | Standard IEC (C14) |
| Maximum Inrush Current | 12.6 Amps (230 VAC / 50 Hz), 7.8 Amps (120 VAC / 60 Hz) |
| Overload Protection | High temperature, output short, excessively low or high AC line voltage |
| Physical | |
| Dimensions | 1.7" H x 19.0" W x 12.8" D (44 mm x 483 mm x 324 mm) |
| Shipping Weight | 11.5 lb (5.2 kg) |
| Net Weight | 8.5 lb (3.9 kg) |
| Cooling System | Single fan creates continuous left-to-right air flow |
| General | |
| Inputs (Control) | 2 remote inputs for Volume Control user interface (PC041966), Mute input control via a normally open contact closure |

Product Information

FreeSpace® ZA 2120-HZ Zone Amplifier



- 1 POWER switch – ON/OFF AC power.
- 2 Power LED – Solid blue LED indicates the unit is ON. Blinking blue LED indicates the unit is in standby mode.
- 3 INPUT SIGNAL LED – LED is green from -37 dBu to 11 dBu, LED goes red over 11 dBu.
- 4 OUTPUT LIMIT LED – LED is green from -46 dBFS to -2 dBFS, LED goes red over -2 dBFS, approximately 80 W/channel. For each output, 120 watts is 0 dBFS.

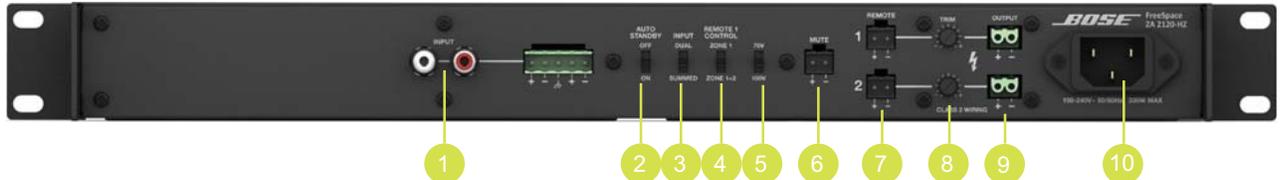

- 1 INPUT – Balanced and unbalanced line-level input connectors.
- 2 AUTO STANDBY – If enabled (ON) the amplifier will go into standby mode after twenty minutes without an input signal. If in standby mode and an audio signal is detected, the amplifier will automatically wake and amplify audio within 0.7 seconds. The OFF position disables the feature.
- 3 INPUT – The input can be set to either DUAL mono inputs or SUMMED to one mono input.
- 4 REMOTE 1 CONTROL – Sets the REMOTE 1 input to control both outputs (or zones) simultaneously (ZONE 1+2), or allows each REMOTE input to control its own output (ZONE 1). If only one remote is being used, then this switch must be set to ZONE 1+2.
- 5 70V/100V – The output can be set to 70 V or 100 V.
- 6 MUTE – Contact closure connection that upon trigger (short) will mute all outputs.
- 7 REMOTE – Input connectors for the Bose® volume control user interface accessory (PC 041966).
- 8 OUTPUT TRIM – Allows for up to 40 dB attenuation of each loudspeaker output.
- 9 OUTPUT – Two inverted 2-pin Euroblock connectors for loudspeaker connections. Outputs are not bridgeable.
- 10 AC Mains receptacle – AC line voltage input.


Product Information

FreeSpace® ZA 2120-HZ Zone Amplifier


AC Current Draw and Thermal Dissipation Information

| Test Signal & Power Level | Load Configuration (Both IZA channels driven) | Total Audio Output, W | 120VAC 60Hz. Line Current, A | 230VAC 50Hz. Line Current, A | Thermal Dissipation, Max | | |
|---|--|--------------------------|---------------------------------|---------------------------------|--------------------------|---------|----------|
| | | | | | Watts | BTU/hr. | kCal/hr. |
| Power On, Idling | | 0 | 0.20 | 0.15 | 34 | 116 | 29 |
| 1/8th Rated Power IEC65 Bandlimited Pink Noise | 70V / Ch | 30 | 0.57 | 0.31 | 71 | 242 | 61 |
| 6 dB Crest Factor DS 16 EQ Enabled | 100V / Ch | 30 | 0.66 | 0.35 | 81 | 276 | 71 |
| 1/3rd Rated Power IEC65 Bandlimited Pink Noise | 70V / Ch | 80 | 1.13 | 0.58 | 133 | 454 | 114 |
| 6 dB Crest Factor DS 16 EQ Enabled | 100V / Ch | 80 | 1.25 | 0.65 | 150 | 512 | 129 |


Mechanical Diagrams

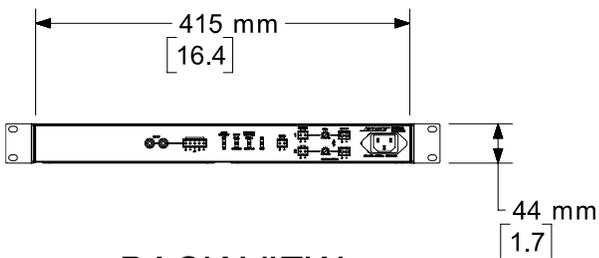

BACK VIEW

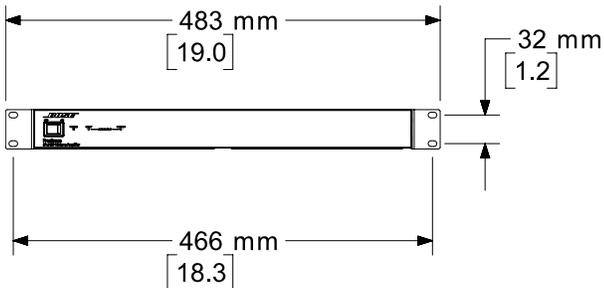

FRONT VIEW

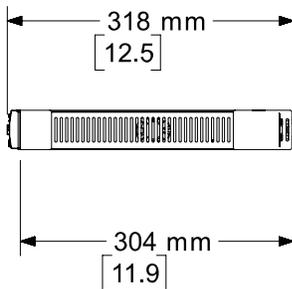

RIGHT VIEW

Safety and Regulatory Compliance

The FreeSpace ZA 2120-HZ zone amplifier complies with CE requirements and is UL listed according to UL60065 (7th edition) and CAN/CSA C22.2 No. 60065-03; CB approved, according to IEC60065 (7th edition), including group and national differences. This model also complies with FCC Part 15B Class A (2003), EN55103-1 (1997), EN55103-2 (1996), and CISPR13 (2003) requirements.

Product Codes

FreeSpace ZA 2120-HZ integrated zone amplifier

| | |
|--------------|-------------|
| 120V – US | 722196-1410 |
| 230V – EU | 722196-2410 |
| 100V – Japan | 722196-3410 |
| 230V – UK | 722196-4410 |
| 240V – AU | 722196-5410 |

Accessories

Volume control user interface (PC041966)

Product Information

FreeSpace® IZA 2120-LZ Integrated Zone Amplifier



Product Description

For background/foreground music and paging applications, Bose® FreeSpace® IZA 2120-LZ integrated zone amplifier elevates the audio experience when using FreeSpace® loudspeakers. Optimized for commercial applications, FreeSpace IZA amplifiers feature selectable Loudspeaker EQ to enrich audio quality, Opti-voice® paging for clear speech intelligibility while providing seamless transitions and Dynamic EQ that ensures full and balanced music at any volume level.

Key Features

- Opti-voice® paging equalizes the vocal frequency range for clear speech intelligibility while providing seamless transitions.
- Dynamic EQ ensures full and balanced music at any volume level.
- Loudspeaker EQ enriches audio quality and simplifies connection to Bose® loudspeakers: FreeSpace® DS 16, DS 40, DS 100 and RoomMatch® Utility RMU105.
- Remote option for volume/source selection eliminates the need for bulky, inefficient, and sound-altering in-line volume controls.
- Expansion-ready connectivity with FreeSpace ZA amplifiers to drive additional zones.
- **Reliable 2 x 120 W Class-D amplification** optimized for low-impedance applications.
- Intuitive feature setup enables the amplifier to be configured without a PC for output, remote, paging, auxiliary input/output and automatic standby options.
- Auto-Standby feature allows the amplifier to consume less power when not in use.
- **Simplified front panel interface** provides end users with tone, source selection and master volume controls as well as a connection to mobile sources via a 3.5 mm connector.
- Remote muting allows the amplifier to be muted via a centralized control system.

Applications

- Designed for a wide range of applications, including:
- Retail stores
- Restaurants and bars
- Hospitality venues
- Conference centers
- Schools
- Auxiliary zones

Product Information

FreeSpace® IZA 2120-LZ Integrated Zone Amplifier

Technical Specifications


| | | | |
|--------------------------------|---|---------------------|-------------------|
| Power Rating | | | |
| Amplifier Power | 2 x 120 W @ 4 Ω, 2 x 60 W @ 8 Ω | | |
| Audio Performance | | | |
| Frequency Response | 20 Hz - 20 kHz (+0/-3 dB, @ 1 W reference 1 kHz) | | |
| THD+N | ≤ 0.5 % (at rated power) | | |
| Channel Separation (Crosstalk) | ≤ -58 dBu (below rated power, 1 kHz) | | |
| Dynamic Range | 88 dB | | |
| Integrated DSP | | | |
| A/D and D/A Converters | 24-bit / 48 kHz | | |
| Processing Functions | Loudspeaker EQ, Bose®Opti-voice®paging, Dynamic equalization | | |
| Loudspeaker Presets | Flat, FreeSpace®DS 16, DS 40, DS 100, and RoomMatch®Utility RMU105 | | |
| Audio Latency | 10.4 ms (any input to speaker output or aux output) | | |
| Audio Inputs | | | |
| | Line Inputs | Page Input | Auxiliary Input |
| Input Channels | 2 unbalanced, 2 balanced | 1 balanced mic/line | 1 unbalanced line |
| Connectors | Stereo RCA, 5-pin Euroblock | 4-pin Euroblock | 1/8" (3.5mm) TRS |
| Input Range | -8 dBu to 22 dBu | -58 dBu to 12 dBu | -60 dBu to -1 dBu |
| Adjustment Range | 0 dB to -30 dB | 0 dB to +50 dB | Fixed |
| Input Impedance | 20 kΩ | 2 kΩ | 20 kΩ |
| Maximum Input Level | 22 dBu | 12 dBu | -1 dBu |
| Sensitivity | -8 dBu | n/a | -3 dBu |
| Nominal Input Level | 4 dBu | -38 dBu | -8 dBu |
| Audio Outputs | | | |
| | Amplifier Outputs | Auxiliary Output | |
| Outputs | 2 | 1 unbalanced | |
| Connectors | 2-pin inverted Euroblock | Stereo RCA | |
| Output Impedance | 4 Ω | 150 Ω | |
| Nominal Output Level | 2 x 120 W @ 4 Ω, 2 x 60 W @ 8 Ω | 2 dBu | |
| Indicators and Controls | | | |
| Power LED | Solid blue indicates power is on, blinking blue indicates standby mode | | |
| Input Signal Clip LED | Green indicates input signal is within -37 dBu to 11 dBu, red indicates signal is over 11 dBu | | |
| Output Signal Clip LED | Green indicates output signal is within -46 dBFS to -2 dBFS, red indicates signal is over -2 dBFS, approximately 80 W/channel, for each output 120 watts is 0 dBFS | | |
| Controls, Front Panel | Power On/Off, Input Select (A/B), Treble/Bass Tone Controls, Master Level | | |
| Controls, Rear Panel | Amplifier Mode DIP switches, Loudspeaker EQ preset selector, Input Gain (A/B/Page), Output trims, Remote | | |
| Electrical | | | |
| Mains Voltage | 100 VAC – 240 VAC (±10%, 50/60 Hz) | | |
| AC Power Consumption | 24 W (Standby), 300 W (Max) | | |
| Mains Connector | Standard IEC (C14) | | |
| Maximum Inrush Current | 12.6 Amps (230 VAC / 50 Hz), 6.6 Amps (120 VAC / 60 Hz) | | |
| Overload Protection | High temperature, output short, excessively low or high AC line voltage | | |
| Physical | | | |
| Dimensions | 1.7" H x 19.0" W x 12.8" D (44 mm x 483 mm x 324 mm) | | |
| Shipping Weight | 12.0 lb (5.4 kg) | | |
| Net Weight | 9.0 lb (4.1 kg) | | |
| Cooling System | Single fan creates continuous left-to-right air flow | | |
| General | | | |
| Inputs (Control) | Remote input for Volume Control with A/B Select user interface (PC041967), Volume Control user interface (PC041966), Mute input control via contact closure (normally open) | | |

Product Information

FreeSpace® IZA 2120-LZ Integrated Zone Amplifier



- 1 **POWER switch** – ON/OFF AC power.
- 2 **Power LED** – Solid blue LED indicates the unit is ON. Blinking blue LED indicates the unit is in standby mode.
- 3 **INPUT SIGNAL LED** – LED is green from -37 dBu to 11 dBu, LED goes red over 11 dBu.
- 4 **OUTPUT LIMIT LED** – LED is green from -46 dBFS to -2 dBFS, LED goes red over -2 dBFS, approximately 80 W/channel. For each output 120 watts is 0 dBFS.
- 5 **AUX INPUT** – 1/8" (3.5 mm) stereo line-level input connector. A cable insertion mutes INPUT A and INPUT B for priority override. Pages can still be made from the PAGE INPUT. AUX INPUT does not have any gain adjustment, therefore, all gain adjustments must be done from the external source device.
- 6 **INPUT A/B Switch** – Allows selection of rear line-input channels A or B.
- 7 **TREBLE/BASS Controls** – Allows tonal adjustments of both outputs simultaneously. These are 1st order shelving filters that provide ± 6 dB adjustment at 7 kHz and above (TREBLE) and 100 Hz and below (BASS). They have a slope of approximately 6 dB/octave.
- 8 **MASTER LEVEL Control** – Controls the overall system volume for both the loudspeakers and the AUX OUTPUT when the AUX OUTPUT DIP switch is set to VARIABLE. If the AUX OUTPUT DIP switch is set to FIXED, the AUX OUTPUT maintains maximum level. When using a REMOTE volume connection, the front panel MASTER LEVEL control becomes disabled.

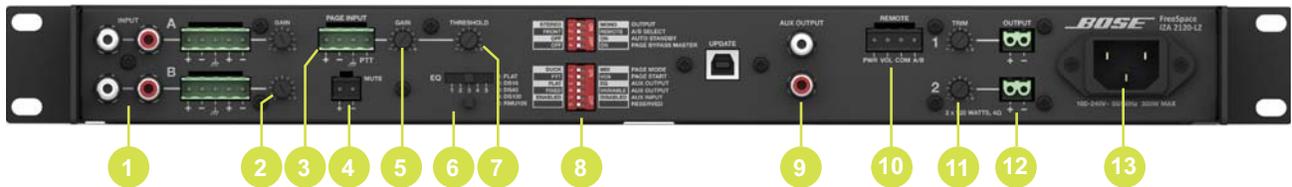

- 1 **INPUT A/B** – Balanced and unbalanced line-level input connectors.
- 2 **INPUT GAIN** – Allows for 0 dB to -30 dB of adjustment to each INPUT A/B.
- 3 **PAGE INPUT** – Euroblock mic/line input that supports dynamic microphones with voice activation (VOX) or a trigger contact closure for use with push-to-talk (PTT) microphones.
- 4 **MUTE** – Contact closure connection that upon trigger (short) will mute all outputs (including AUX OUTPUT).
- 5 **PAGE INPUT GAIN** – Allows for 0 dB to $+50$ dB of gain control of PAGE INPUT signal.
- 6 **EQ** – Provides loudspeaker equalization presets: Flat, DS 16, DS 40, DS 100 and RMU105. Use the Flat setting for loudspeakers that are not Bose or that do not require EQ.
- 7 **PAGE INPUT THRESHOLD** – Adjusts the level at which the VOX PAGE INPUT signal causes other inputs to be lowered. A 10 dB adjustment range lifts the page trigger level away from the noise floor to prevent false triggers. At minimum setting, a -70 dBu signal will trigger a VOX page. At maximum setting, a -60 dBu signal will trigger a VOX page. When in PTT page mode this adjustment is not active.
- 8 **DIP Switches** – A bank of switches to set the amplifier configuration. All switches set to the left position is the standard configuration.
- 9 **AUX OUTPUT** – Variable or fixed, unbalanced line-level output signal for use with ZA zone amplifiers or for routing the signal to additional audio equipment.
- 10 **REMOTE** – Input connector for either a Bose® volume control with A/B switch user interface accessory (PC 041967) or a Bose volume control user interface accessory (PC 041966).
- 11 **OUTPUT 1/OUTPUT 2 TRIM** – Allows for up to 40 dB attenuation of the individual loudspeaker outputs relative to the master level.
- 12 **OUTPUT** – Two inverted 2-pin Euroblock connectors for loudspeaker connections. Outputs are not bridgeable.
- 13 **AC Mains receptacle** – AC line voltage input.



Product Information

FreeSpace® IZA 2120-LZ Integrated Zone Amplifier


AC Current Draw and Thermal Dissipation Information

| Test Signal & Power Level | Load Configuration (Both IZA channels driven) | Total Audio Output, W | 120VAC 60Hz. Line Current, A | 230VAC 50Hz. Line Current, A | Thermal Dissipation, Max | | |
|---|--|--------------------------|---------------------------------|---------------------------------|--------------------------|---------|----------|
| | | | | | Watts | BTU/hr. | kCal/hr. |
| Power On, Idling | | 0 | 0.16 | 0.13 | 30 | 102 | 26 |
| 1/8th Rated Power IEC65 Bandlimited Pink Noise | 8Ω / Ch | 15 | 0.19 | 0.15 | 34 | 116 | 29 |
| 6 dB Crest Factor DS 16 EQ Enabled | 4Ω / Ch | 30 | 0.50 | 0.28 | 64 | 218 | 55 |
| 1/3rd Rated Power IEC65 Bandlimited Pink Noise | 8Ω / Ch | 40 | 0.25 | 0.17 | 39 | 133 | 34 |
| 6 dB Crest Factor DS 16 EQ Enabled | 4Ω / Ch | 80 | 1.00 | 0.539 | 136 | 464 | 117 |

Mechanical Diagrams

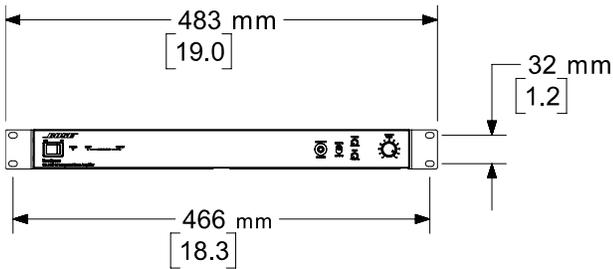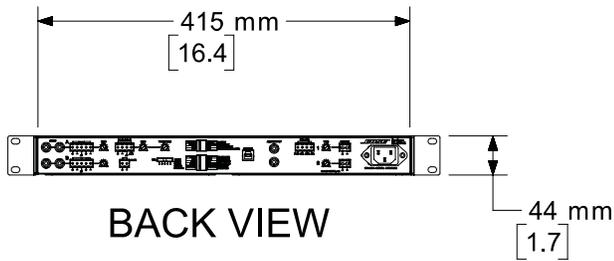

RIGHT VIEW

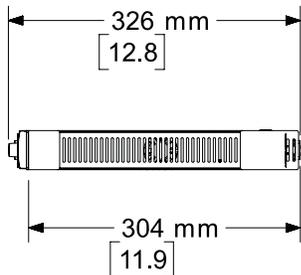

Safety and Regulatory Compliance

The FreeSpace IZA 2120-LZ integrated zone amplifier complies with CE requirements and is UL listed according to UL60065 (7th edition) and CAN/CSA C22.2 No. 60065-03; CB approved, according to IEC60065 (7th edition), including group and national differences. This model also complies with FCC Part 15B Class A (2003), EN55103-1 (1997), EN55103-2 (1996), and CISPR13 (2003) requirements.

Product Codes

| | |
|---|-------------|
| FreeSpace IZA 2120-LZ integrated zone amplifier | |
| 120V – US | 719782-1420 |
| 230V – EU | 719782-2420 |
| 100V – Japan | 719782-3420 |
| 230V – UK | 719782-4420 |
| 240V – AU | 719782-5420 |

Accessories

- Volume control user interface (PC041966)
- Volume control with A/B switch user interface (PC041967)

Product Information

FreeSpace® ZA 2120-LZ Zone Amplifier



Product Description

The Bose® FreeSpace® ZA 2120-LZ zone amplifier is designed to provide basic amplification and sound system expansion when using front-end Bose products such as FreeSpace® integrated zone amplifiers and ControlSpace® engineered sound processors.

Key Features

- **Reliable 2 x 120 W Class-D amplification** optimized for low-impedance applications.
- **Remote** option for volume control eliminates the need for bulky, inefficient, and sound-altering in-line volume controls.
- **Expansion-ready connectivity** with FreeSpace® IZA amplifiers when additional sources and loudspeaker processing is required.
- **Intuitive feature setup** enables the amplifier to be configured without a PC for output and automatic standby options.
- **Auto-Standby feature** allows the amplifier to consume less power when not in use.
- **Remote muting** allows the amplifier to be muted via a centralized control system.

Applications

Designed for a wide range of applications, including:

- Retail stores
- Restaurants and bars
- Hospitality venues
- Conference centers
- Schools
- Auxiliary zones

Product Information

FreeSpace® ZA 2120-LZ Zone Amplifier

Technical Specifications


| | |
|--------------------------------|---|
| Power Rating | |
| Amplifier Power | 2 x 120 W @ 4 Ω, 2 x 60 W @ 8 Ω |
| Audio Performance | |
| Frequency Response | 20 Hz - 20 kHz (+0/-3 dB, @ 1 W reference 1 kHz) |
| THD+N | ≤ 0.5 % (at rated power) |
| Channel Separation (Crosstalk) | ≤ -58 dBu (below rated power, 1 kHz) |
| Dynamic Range | 88 dB |
| Audio Inputs | |
| Input Channels | 1 unbalanced, 1 balanced |
| Connectors | Stereo RCA, 5-pin Euroblock |
| Input Range | -8 dBu to 22 dBu |
| Input Impedance | 20 kΩ |
| Maximum Input Level | 22 dBu |
| Nominal Input Level | 4 dBu |
| Audio Outputs | |
| Outputs | 2 |
| Connectors | 2-pin inverted Euroblock |
| Nominal Output Level | 2 x 120 W @ 4 Ω, 2 x 60 W @ 8 Ω |
| Indicators and Controls | |
| Power LED | Solid blue indicates power is on, blinking blue indicates standby mode |
| Input Signal Clip LED | Green indicates input signal is within -37 dBu to 11 dBu, red indicates signal is over 11 dBu |
| Output Signal Clip LED | Green indicates output signal is within -46 dBFS to -2 dBFS, red indicates signal is over -2 dBFS, approximately 80 W/channel, for each output 120 watts is 0dBFS |
| Controls, Front Panel | Power On/Off |
| Controls, Rear Panel | Auto Standby: On/Off switch, Output: Stereo/Mono switch, Mute, Output trims, Remote |
| Electrical | |
| Mains Voltage | 100 VAC - 240 VAC (±10%, 50/60 Hz) |
| AC Power Consumption | 21 W (Standby), 300 W (Max) |
| Mains Connector | Standard IEC (C14) |
| Maximum Inrush Current | 12.6 Amps (230 VAC / 50 Hz), 7.8 Amps (120 VAC / 60 Hz) |
| Overload Protection | High temperature, output short, excessively low or high AC line voltage |
| Physical | |
| Dimensions | 1.7" H x 19.0" W x 12.8" D (44 mm x 483 mm x 324 mm) |
| Shipping Weight | 11.5 lb (5.2 kg) |
| Net Weight | 8.5 lb (3.9 kg) |
| Cooling System | Single fan creates continuous left-to-right air flow |
| General | |
| Inputs (Control) | Remote input for Volume Control (PC041966), Mute input control via a normally open contact closure |

Product Information

FreeSpace® ZA 2120-LZ Zone Amplifier



- 1 **POWER switch** – ON/OFF AC power.
- 2 **Power LED** – Solid blue LED indicates the unit is ON. Blinking blue LED indicates the unit is in standby mode.
- 3 **INPUT SIGNAL LED** – LED is green from -37 dBu to 11 dBu, LED goes red over 11 dBu.
- 4 **OUTPUT LIMIT LED** – LED is green from -46 dBFS to -2 dBFS, LED goes red over -2 dBFS, approximately 80 W/channel. For each output, 120 watts is 0 dBFS.

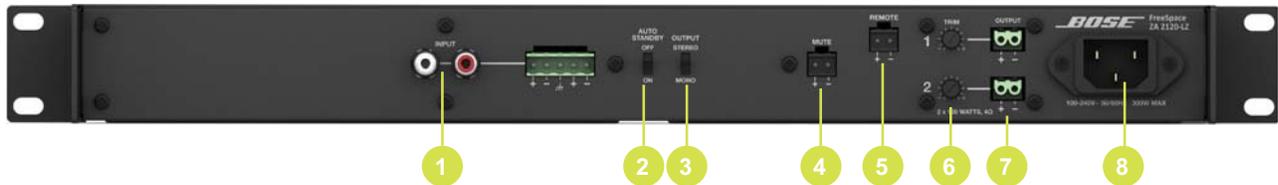

- 1 **INPUT** – Balanced and unbalanced line-level input connectors.
- 2 **AUTO STANDBY** – If enabled (ON) the amplifier will go into standby mode after twenty minutes without an input signal. If in standby mode and an audio signal is detected, the amplifier will automatically wake and amplify audio within 0.7 seconds. The OFF position disables the feature.
- 3 **OUTPUT** – The output can be set to STEREO or MONO.
- 4 **MUTE** – Contact closure connection that upon trigger (short) will mute all outputs.
- 5 **REMOTE** – Input connector for the Bose® volume control user interface accessory (PC 041966).
- 6 **OUTPUT TRIM** – Allows for up to 40 dB attenuation of each loudspeaker output.
- 7 **OUTPUT** – Two inverted 2-pin Euroblock connectors for loudspeaker connections. Outputs are not bridgeable.
- 8 **AC Mains receptacle** – AC line voltage input.




Product Information

FreeSpace® ZA 2120-LZ Zone Amplifier

AC Current Draw and Thermal Dissipation Information

| Test Signal & Power Level | Load Configuration (Both IZA channels driven) | Total Audio Output, W | 120VAC 60Hz. Line Current, A | 230VAC 50Hz. Line Current, A | Thermal Dissipation, Max | | |
|---|--|--------------------------|---------------------------------|---------------------------------|--------------------------|---------|----------|
| | | | | | Watts | BTU/hr. | kCal/hr. |
| Power On, Idling | | 0 | 0.13 | 0.12 | 28 | 96 | 24 |
| 1/8th Rated Power IEC65 Bandlimited Pink Noise | 8Ω / Ch | 15 | 0.18 | 0.14 | 32 | 109 | 28 |
| 6 dB Crest Factor DS 16 EQ Enabled | 4Ω / Ch | 30 | 0.50 | 0.27 | 62 | 212 | 53 |
| 1/3rd Rated Power IEC65 Bandlimited Pink Noise | 8Ω / Ch | 40 | 0.24 | 0.17 | 39 | 133 | 34 |
| 6 dB Crest Factor DS 16 EQ Enabled | 4Ω / Ch | 80 | 1.00 | 0.55 | 127 | 433 | 109 |

Mechanical Diagrams

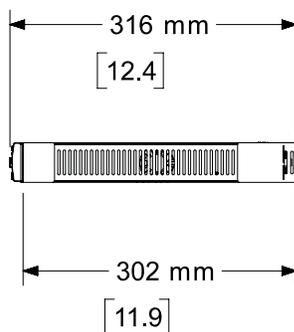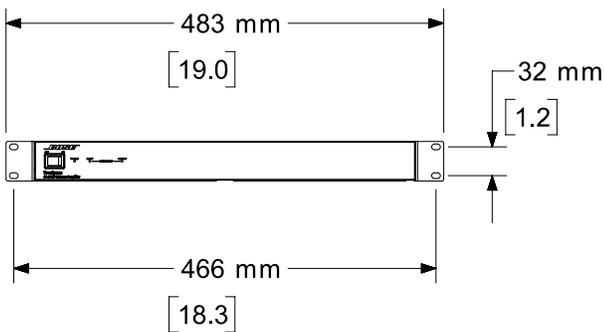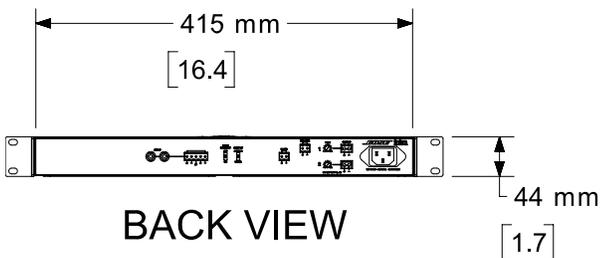

Safety and Regulatory Compliance

The FreeSpace ZA 2120-LZ zone amplifier complies with CE requirements and is UL listed according to UL60065 (7th edition) and CAN/CSA C22.2 No. 60065-03; CB approved, according to IEC60065 (7th edition), including group and national differences. This model also complies with FCC Part 15B Class A (2003), EN55103-1 (1997), EN55103-2 (1996), and CISPR13 (2003) requirements.

Product Codes

FreeSpace ZA 2120-LZ integrated zone amplifier

| | |
|--------------|-------------|
| 120V – US | 722196-1420 |
| 230V – EU | 722196-2420 |
| 100V – Japan | 722196-3420 |
| 230V – UK | 722196-4420 |
| 240V – AU | 722196-5420 |

Accessories

Volume control user interface (PC041966)

ELECTROSTATIC DISCHARGE SENSITIVE (ESDS) DEVICE HANDLING

This unit contains ESDS devices. We recommend the following precautions when repairing, replacing or transporting ESDS devices:

- Perform work at an electrically grounded work station.
- Wear wrist straps that connect to the station or heel straps that connect to conductive floor mats.
- Avoid touching the leads or contacts of ESDS devices or PC boards even if properly grounded. Handle boards by the edges only.
- Transport or store ESDS devices in ESD protective bags, bins, or totes. Do not insert unprotected devices into materials such as plastic, polystyrene foam, clear plastic bags, bubble wrap or plastic trays.

PART LIST NOTES

1. The individual parts located on the PCBs are listed in the Electrical Part List.
2. This part is referenced for informational purposes only. It is not stocked as a repair part. Refer to the next higher assembly for a replacement part.
3.  This part is critical for safety purposes. Failure to use a substitute replacement with the same safety characteristics as the recommended replacement part might create shock, fire and/or other hazards.

PACKAGING PART LIST

IZA 2120-HZ and IZA 2120-LZ Amplifiers (refer to Figure 1)

| Item Number | Description | Part Number | Qty. | Note |
|-------------|---|---|--------|--|
| 1 | PE FOAM, REAR, 508X107X56 | 740151-001S | 1 | |
| 2 | CARTON, LINE CORD/ACCESSORIES | 753016-001S | 1 | |
| 3 | PLUG, 4P, GREEN (PAGE INPUT) | - | 1 | |
| 4 | PLUG, 4P, BLACK (REMOTES) IZA 2120-HZ IZA 2120-LZ | - - - | 2 1 | |
| 5 | PLUG, 2P, BLACK (MUTE) | - | 1 | |
| 6 | PLUG, 2P, GREEN (OUTPUTS) | - | 2 | |
| 7 | PLUG, 5P, GREEN (INPUTS) | - | 2 | |
| 8 | RUBBER FOOT | 348623-0010 | 4 | |
| 9 | ZIPLOC BAG, CONNECTORS | - | 1 | |
| 10 | CARTON, AMP ASSY, FS IZA 2120-HZ | 750854-001S | 1 | |
| 10 | CARTON, AMP ASSY, FS IZA 2120-LZ | 750857-001S | 1 | |
| 11 | PE FOAM, FRONT, 508X107X93 | 740150-001S | 1 | |
| 12 | CABLE, LINE CORD, IEC C13, NA CABLE, LINE CORD, IEC C13, EU CABLE, LINE CORD, IEC C13, JP CABLE, LINE CORD, IEC C13, UK CABLE, LINE CORD, IEC C13, AU | 350745-0010 350747-0010 350749-0010 350748-0010 350746-0010 | 1 | 3  |
| 13 | POLYBAG, OWNER'S MANUAL | - | 1 | |
| 14 | GUIDE, INSTALL & OPERATION, IZA/ZA, 2120-HZ/LZ | 747973-0010 | 1 | |
| - | KIT, CONNECTOR, IZA 2120-HZ, SVCE | 769408-001S | 1 | |
| - | KIT, CONNECTOR, IZA 2120-LZ, SVCE | 769409-001S | 1 | |

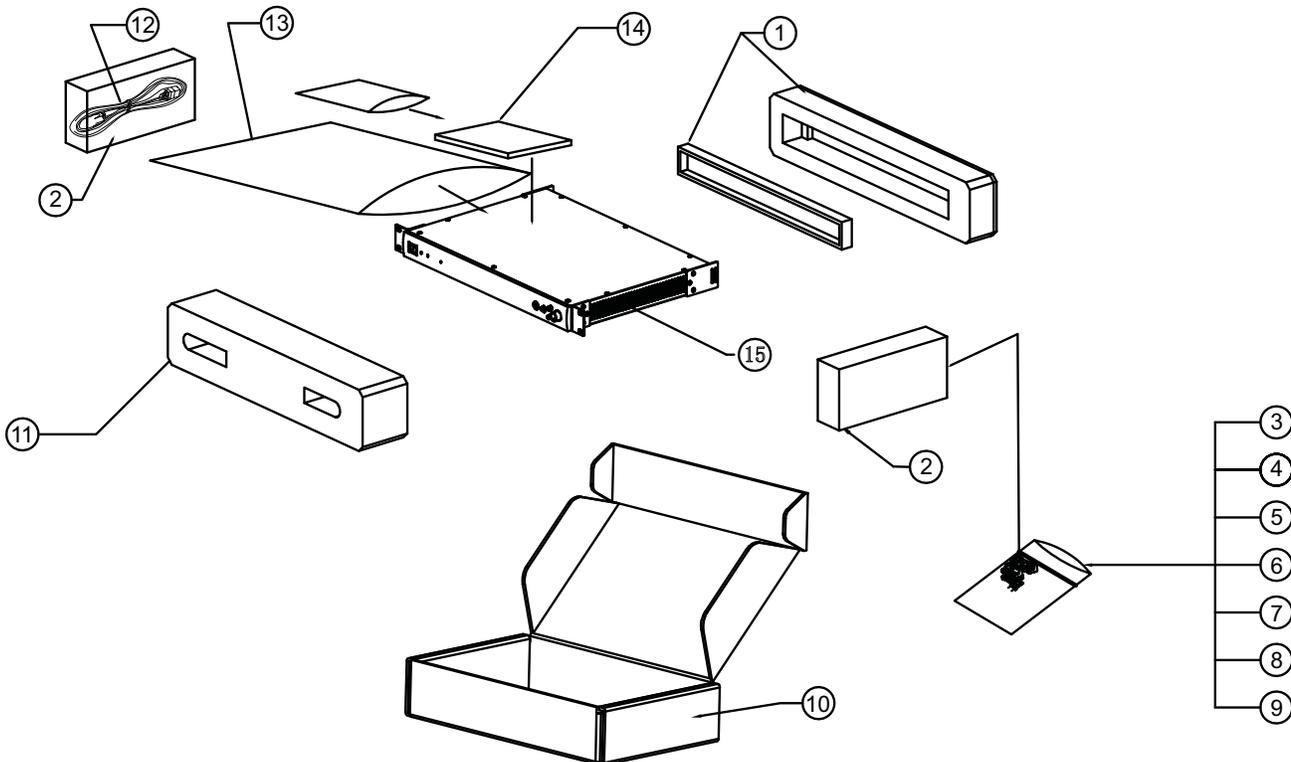


Figure 1. IZA 2120-HZ and IZA 2120-LZ Packing View

PACKAGING PART LIST

ZA 2120-HZ and ZA 2120-LZ Systems (refer to Figure 2)

| Item Number | Description | Part Number | Qty. | Note |
|-------------|------------------------------------|-------------|------|------|
| 1 | PE FOAM, REAR, 508X107X56 | 740151-001S | 1 | |
| 2 | RCA CABLE | 351448-0010 | 1 | |
| 3 | ZIP LOCK BAG | - | 1 | |
| 4 | PLUG, 2P, GREEN (OUTPUTS) | - | 2 | |
| 5 | PLUG, 2P, BLACK (REMOTES AND MUTE) | - | 3 | |
| | ZA 2120-HZ | - | 2 | |
| 6 | PLUG, 5P (INPUT) | - | 1 | |
| 7 | FOOT, RUBBER | 348623-001S | 4 | |
| 8 | CARTON, LINE CORD/ACCESSORIES | 753016-001S | 1 | |
| 9 | CARTON, AMP ASSY, FS ZA 2120-HZ | 750859-001S | 1 | |
| | CARTON, AMP ASSY, FS ZA 2120-LZ | 750861-001S | 1 | |
| 10 | PE FOAM, FRONT, 508X107X93 | 740150-001S | 1 | |
| 11 | CABLE, LINE CORD, IEC C13, NA | 350745-0010 | 1 | 3 |
| | CABLE, LINE CORD, IEC C13, EU | 350747-0010 | | |
| | CABLE, LINE CORD, IEC C13, JP | 350749-0010 | | |
| | CABLE, LINE CORD, IEC C13, UK | 350748-0010 | | |
| | CABLE, LINE CORD, IEC C13, AU | 350746-0010 | | ⚠ |
| 12 | POLY BAG | - | 1 | |
| 13 | POLY BAG, GUIDE | - | 1 | |
| 14 | INSTALLATION AND OPERATING GUIDE | 747973-0010 | 1 | |
| - | KIT, CONNECTOR, ZA 2120-HZ, SVCE | 769410-001S | 1 | |
| - | KIT, CONNECTOR, ZA 2120-LZ, SVCE | 769411-001S | 1 | |

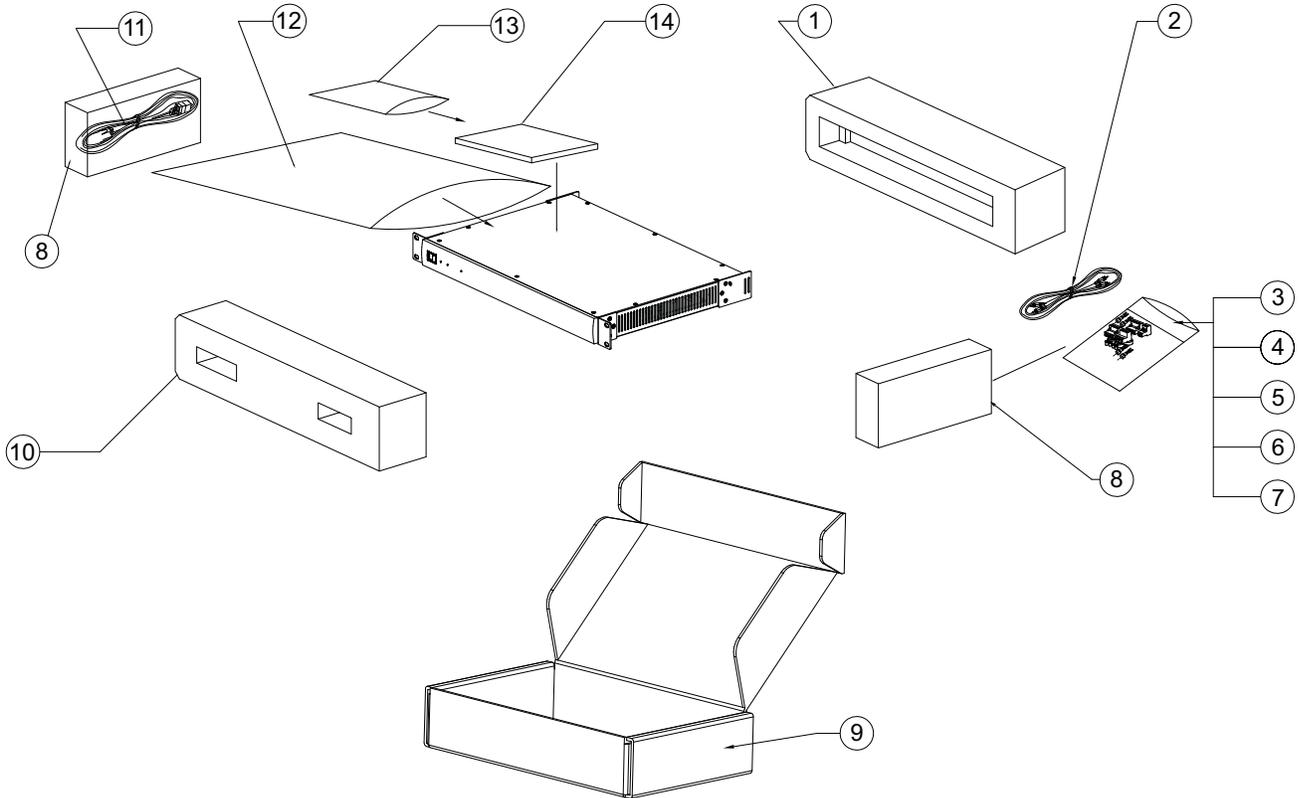


Figure 2. ZA 2120-HZ and ZA 2120-LZ Packing View

MAIN PART LIST

IZA 2120-HZ and IZA 2120-LZ Amplifiers (refer to Figure 3)

| Item Number | Description | Part Number | Qty. | Note |
|-------------|--|----------------------------|------|--|
| 1 | TOP COVER (with foam) | 719961-031S | 1 | |
| 2 | SCREW, M3x5, MACHINE, FLAT-CS | - | 20 | |
| 3 | PCB ASSY, REAR PANEL OUTPUT, SVCE | 729597-001S | 1 | |
| 4 | BRASS TUBE, M3x6.3 | - | 2 | |
| 5 | PCB ASSY, USB, SERV | 729593-001S | 1 | |
| 6 | PCB ASSY, REAR, MASTER HI-Z, SVCE PCB ASSY, REAR, MASTER LO-Z, SVCE | 729421-001S 729421-002S | 1 | |
| 7 | BRASS TUBE, M3x10 | - | 10 | |
| 8 | RING, PLASTIC, RCA JACK | - | 3 | |
| 9 | PCB ASSY, SMPS, HI-Z MASTER, SVCE PCB ASSY, SMPS, LO-Z, SVCE | 729409-001S 729409-002S | 1 | |
| 10 | SCREW, M3x6 | - | 6 | |
| 11 | FAN DC 5V, 4200RPM | 740103-001S | 1 | |
| 12 | SCREW, M3.5x16, B-TITE | - | 4 | |
| 13 | BRACKET REAR | 750326-031S | 2 | |
| 14 | CONN, ASSY, IEC, FS4400, SERVICE | 301396 | 1 | 3  |
| 15 | SCREW, M3x8 | - | 2 | |
| 16 | LOCK NUT, M8 | - | 2 | |
| 17 | SCREW, M3x6.0MM | - | 24 | |
| 18 | BRACKET FRONT (RACK EAR) | 740102-031S | 2 | |
| 19 | SCREW, M3x6, BLK (RACK EAR) | - | 6 | |
| 20 | CRINKLE WASHER | - | 1 | |
| 21 | PLAIN WASHER | - | 1 | |
| 22 | SPRING WASHER | - | 1 | |
| 23 | NUT, M4 | - | 1 | |
| 24 | PCB ASSY, LED, SVCE | 729412-001S | 1 | |
| 25 | SCREW, B-TITE, PAN, M2.3x8 | - | 8 | |
| 26 | PCB ASSY, FRONT, HI-Z, SVCE PCB ASSY, FRONT, LO-Z, SVCE | 729601-001S 729601-002S | 1 | |
| 27 | KNOB, VR | 348611-0310 | 1 | |
| 28 | NUT, VOLUME KNOB | - | 1 | |
| 29 | WASHER, PLAIN | - | 1 | |
| 30 | PANEL, PLASTIC, FRONT, HI-Z MASTER, SILVER PANEL, PLASTIC, FRONT, LO-Z MASTER, SILVER | 719984-031S 719984-032S | 1 | |
| 31 | SWITCH, ROCKER, 2 POLE, 10A, 240V, BLACK | 348612-0010 | 1 | 3  |
| 32 | LIGHT PIPE (LED PCB) | - | 3 | |
| 33 | INTERNAL TOOTH WASHER | - | 2 | |
| 34 | SCREW, M3x6 | - | 2 | |
| 35 | PCB ASSY, DSP, HI-Z, SVCE PCB ASSY, DSP, LO-Z, SVCE | 729410-001S 729410-002S | 1 | |
| 36 | PCB ASSY, AMP, HI-Z MASTER, SVCE PCB ASSY, AMP, LO-Z AMPO, SVCE | 729612-001S 740163-001S | 1 | |
| 37 | INSULATOR, PC BOARD | 748404-001S | 1 | |
| 38 | BRASS TUBE, M3x3.5MM | - | 2 | |
| 39 | BRASS TUBE, M3x18MM | - | 2 | |
| - | ASSY, CABLE FFC, DSP TO AMP | 753377-001S | 1 | |
| - | ASSY, CABLE FFC, DSP TO FRONT PANEL | 753376-001S | 1 | |
| - | ASSY, CABLE FFC, DSP TO REAR PANEL-1 | 753372-001S | 1 | |
| - | ASSY, CABLE FFC, DSP TO REAR PANEL-2 | 753375-001S | 1 | |

MAIN PART LIST

IZA 2120-HZ and IZA 2120-LZ Amplifiers (refer to Figure x)

| Item Number | Description | Part Number | Qty. | Note |
|-------------|------------------------------|-------------|------|--------|
| - | ASSY, CABLE, GROUND INLET | 753371-001S | 1 | 3 ⚠ |
| - | ASSY, HARNESS, DSP TO AMP | 753370-001S | 1 | |
| - | ASSY, HARNESS, DSP TO PS | 753369-001S | 1 | |
| - | ASSY, HARNESS, IEC TO SWITCH | 753367-001S | 1 | 3 ⚠ |
| - | ASSY, HARNESS, PS TO AMP | 753368-001S | 1 | |
| - | CLAMP IC 65MN | 740002-001S | 9 | |

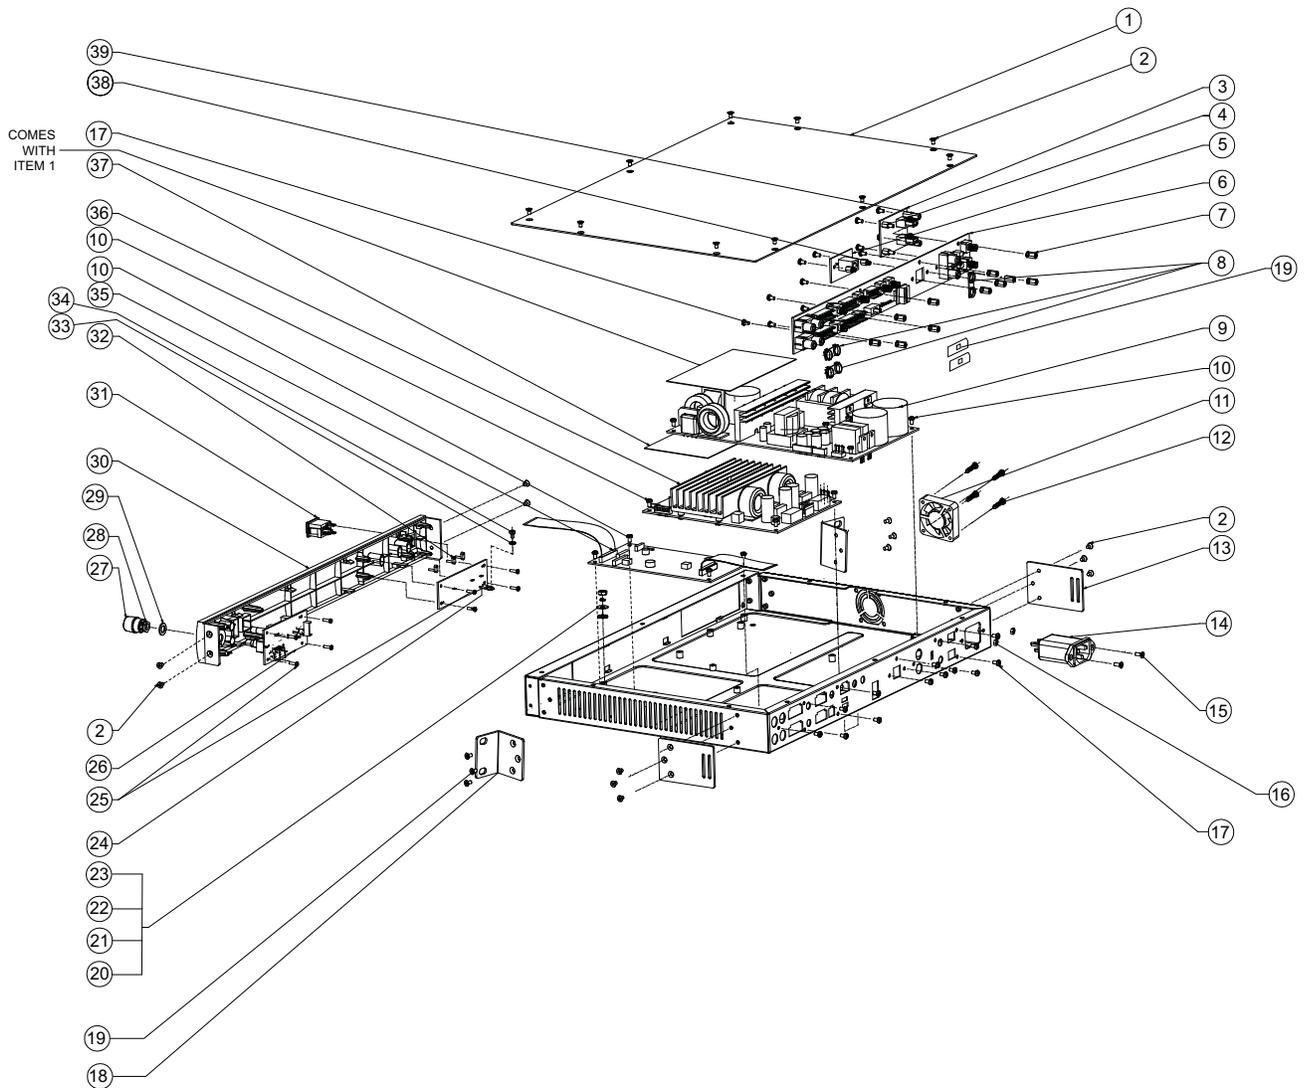


Figure 3. IZA 2120-HZ and IZA 2120-LZ Amplifiers Exploded View

MAIN PART LIST

ZA 2120-HZ and ZA 2120-LZ Amplifiers (refer to Figure 4)

| Item Number | Description | Part Number | Qty. | Note |
|-------------|---|----------------------------|------|--|
| 1 | TOP COVER ASSY, SVCE (INCLUDES INSULATING SHEET) | 719961-031S | 1 | |
| 2 | SCREW, MACHINE, M3x5, FLAT-CS | - | 20 | |
| 3 | PCB ASSY, REAR PANEL OUTPUT, HI-Z, SVCE | 729597-001S | 1 | |
| 4 | BRASS TUBE, M3x18 | - | 2 | |
| 5 | PCB ASSY, REAR, AMPO HI-Z, SVCE PCB ASSY, REAR, AMPO LO-Z, SVCE_ | 729421-003S 729421-004S | 1 | |
| 6 | BRASS TUBE, M3x10 | - | 8 | |
| 7 | PLASTIC CIRCLE FOR RCA JACKS | - | 1 | |
| 8 | SCREW, M3x6 | - | 10 | |
| 9 | PCB ASSY, SMPS, HI-Z, SVCE PCB ASSY, SMPS, LO-Z, SVCE | 729409-001S 729409-002S | 1 | |
| 10 | SCREW, M3x6, SMPS | - | 11 | |
| 11 | SCREW, M3.5x16, B-TITE | - | 4 | |
| 12 | FAN DC 5V, 4200RPM | 740103-001S | 1 | |
| 13 | NUT, HEX, M4 | - | 1 | |
| 14 | EXTERNAL TOOTH WASHER, M4 | - | 1 | |
| 15 | PLAIN WASHER, M4 | - | 1 | |
| 16 | SPRING WASHER, M4 | - | 1 | |
| 17 | SCREW, M3x8 | - | 2 | |
| 18 | CONN, ASSY, IEC, FS4400, SERVICE | 301396 | 1 | 3  |
| 19 | NUT, M3 | - | 2 | |
| 20 | BRACKET REAR | 750326-031S | 2 | |
| 21 | BRACKET FRONT (RACK EAR) | 740102-031S | 2 | |
| 22 | SCREW, M3x6, BLK | - | 6 | |
| 23 | PANEL, FRONT, HI-Z AMPO, SILVER PANEL, FRONT, LO-Z AMPO, SILVER | 719987-033S 719987-034S | 1 | |
| 24 | LIGHT PIPE | - | 3 | |
| 25 | SWITCH, ROCKER, 2 POLE, 10A, 240V, BLACK | 348612-0010 | 1 | 3  |
| 26 | PCB ASSY, LED, MAIN, SVCE | 729412-001S | 1 | |
| 27 | SCREW, M2.3x8 | - | 4 | |
| 28 | PCB ASSY, AMP, HI-Z MASTER, SVCE PCB ASSY, AMP, LO-Z AMPO, SVCE | 729612-001S 740163-001S | 1 | |
| 29 | PC INSULATING SHEET, CHASSIS | - | 1 | |
| 30 | BRASS TUBE, M3x6.3 | - | 2 | |
| - | CLAMP IC 65MN | 740002-001S | 9 | |
| - | INSULATOR, TOP COVER (INCLUDED WITH ITEM 1) | 748404-001S | 1 | |
| - | ASSY, HARNESS, IEC TO SWITCH | 753367-001S | 1 | 3  |
| - | ASSY, HARNESS, PS TO AMP | 753368-001S | 1 | |
| - | ASSY, CABLE, GROUND INLET | 753371-001S | 1 | 3  |
| - | ASSY, CABLE, FFC, AMP TO REAR PANEL | 753387-001S | 1 | |

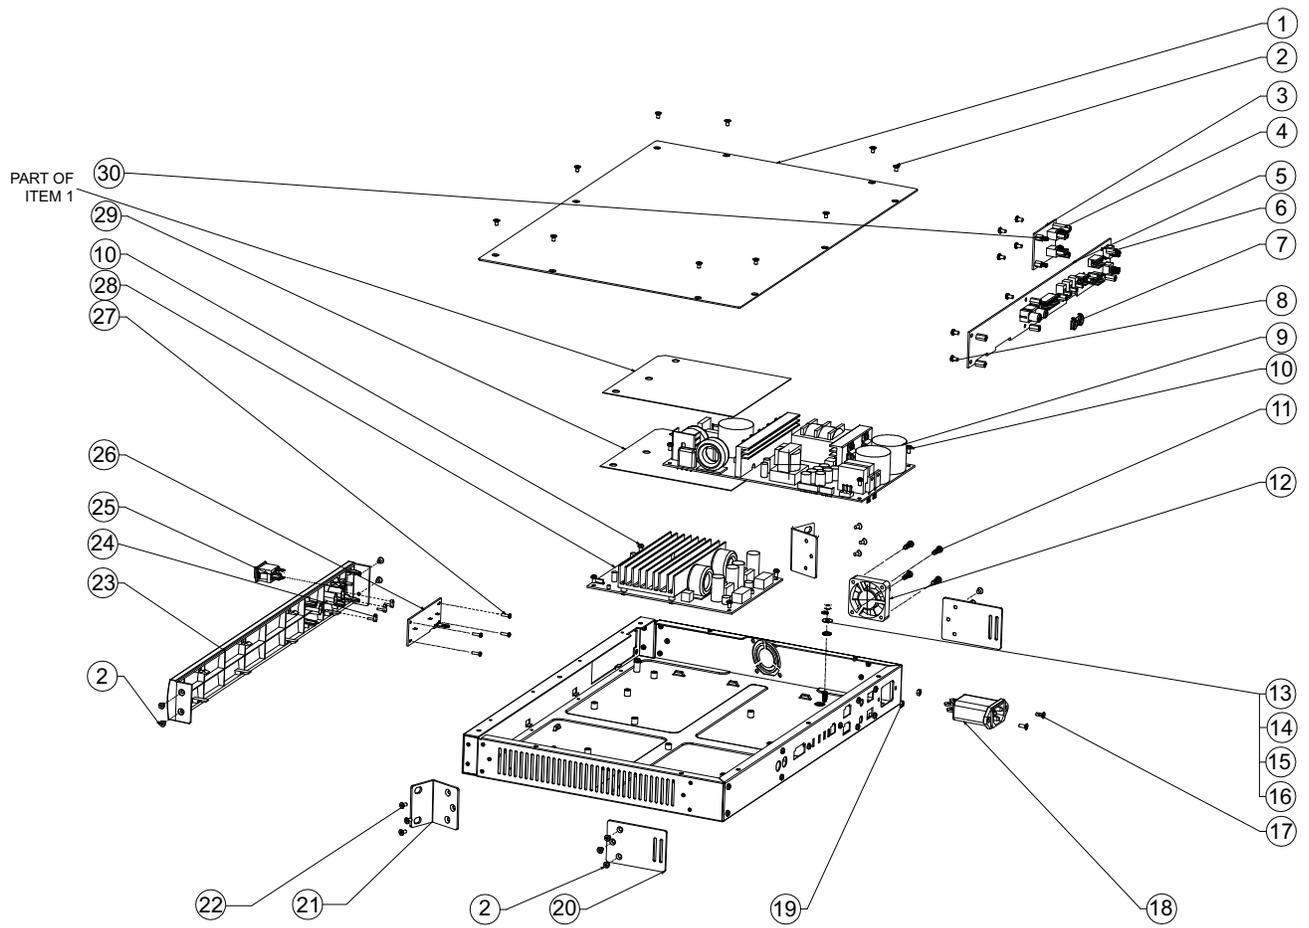


Figure 4. ZA 2120-HZ and ZA 2120-LZ Amplifiers Exploded View

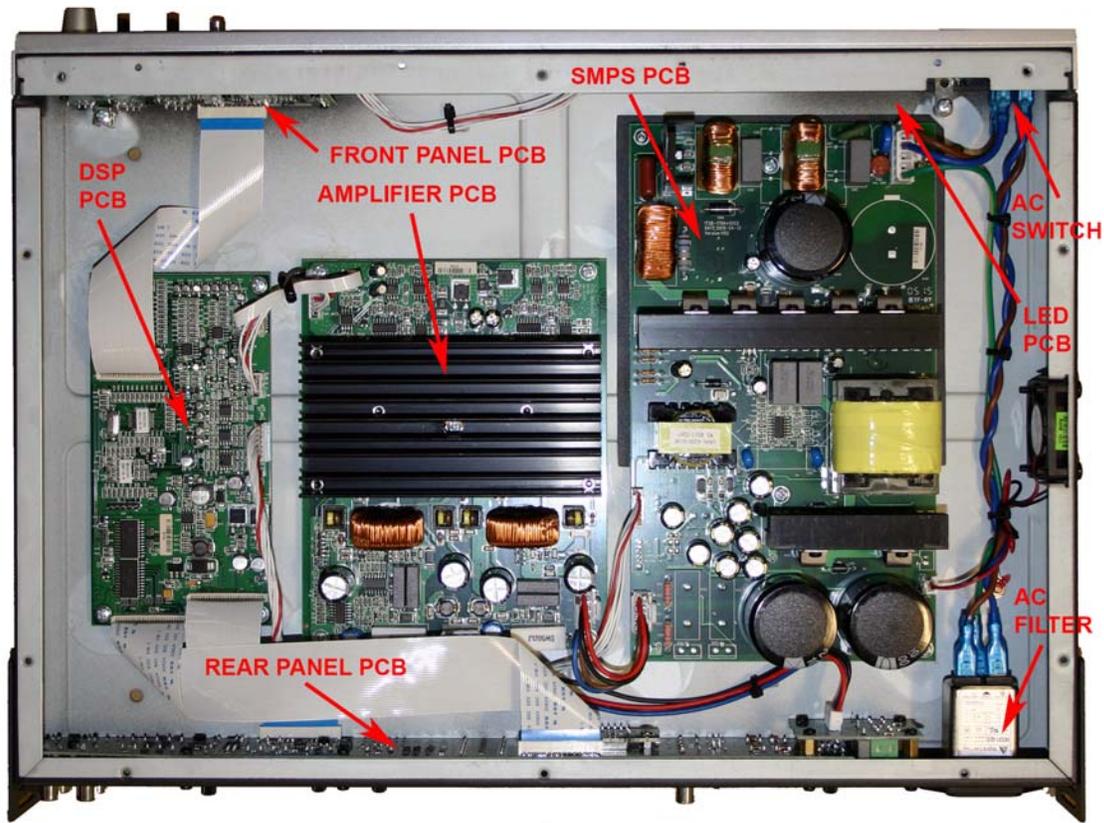


Figure 5. IZA 2120-HZ Chassis View

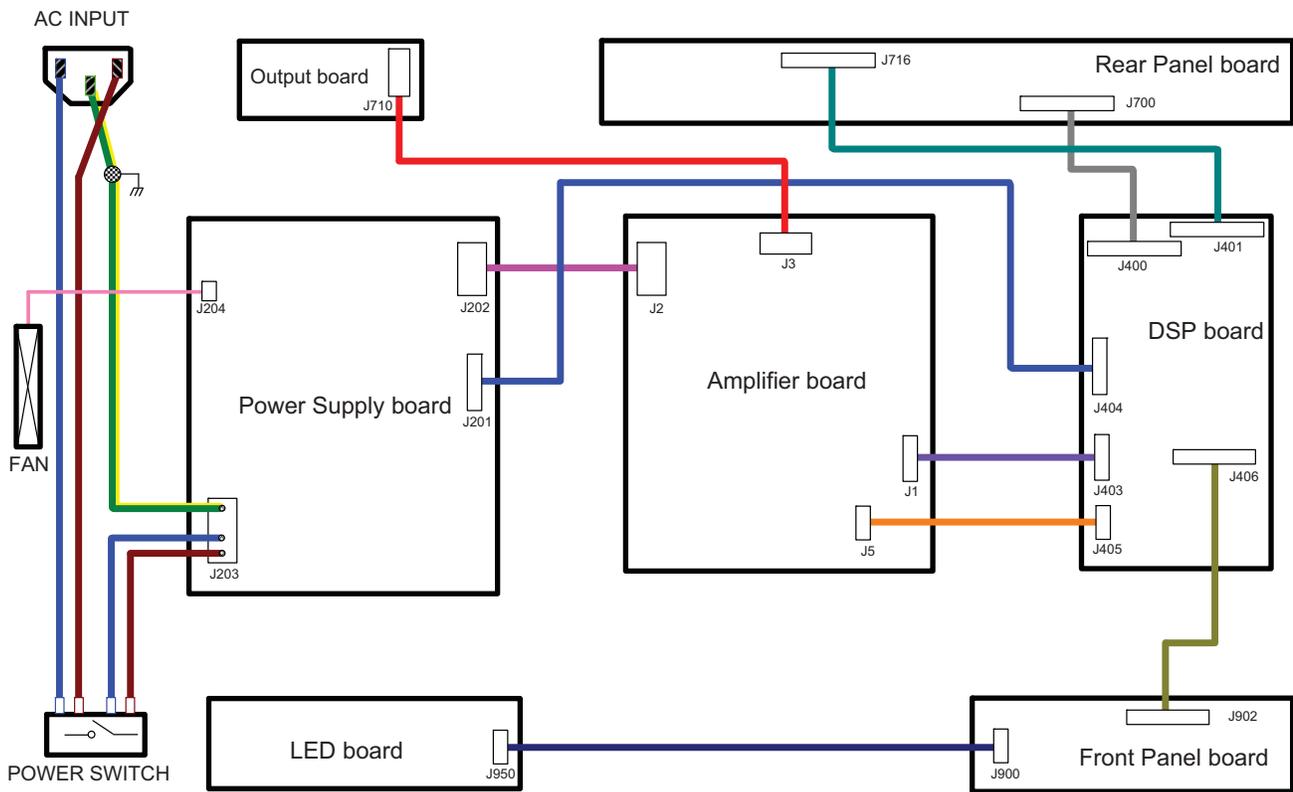


Figure 6. IZA 2120-HZ Wiring Diagram

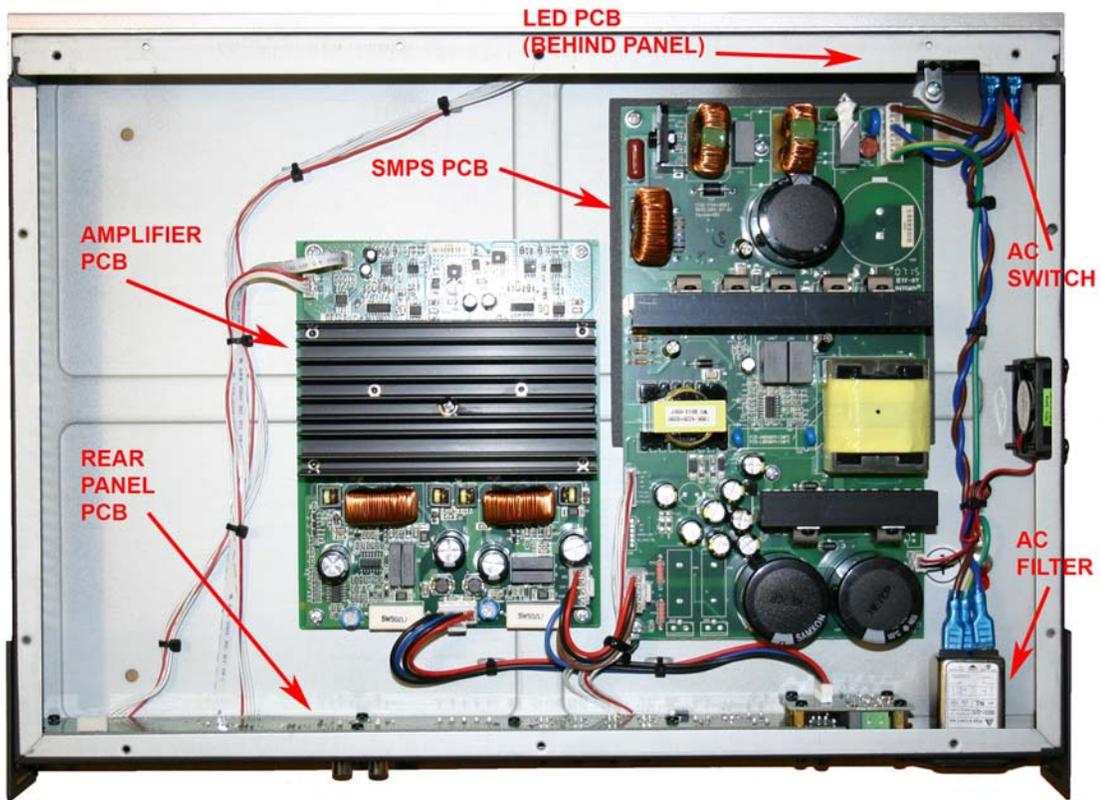


Figure 7. ZA 2120-HZ Chassis View

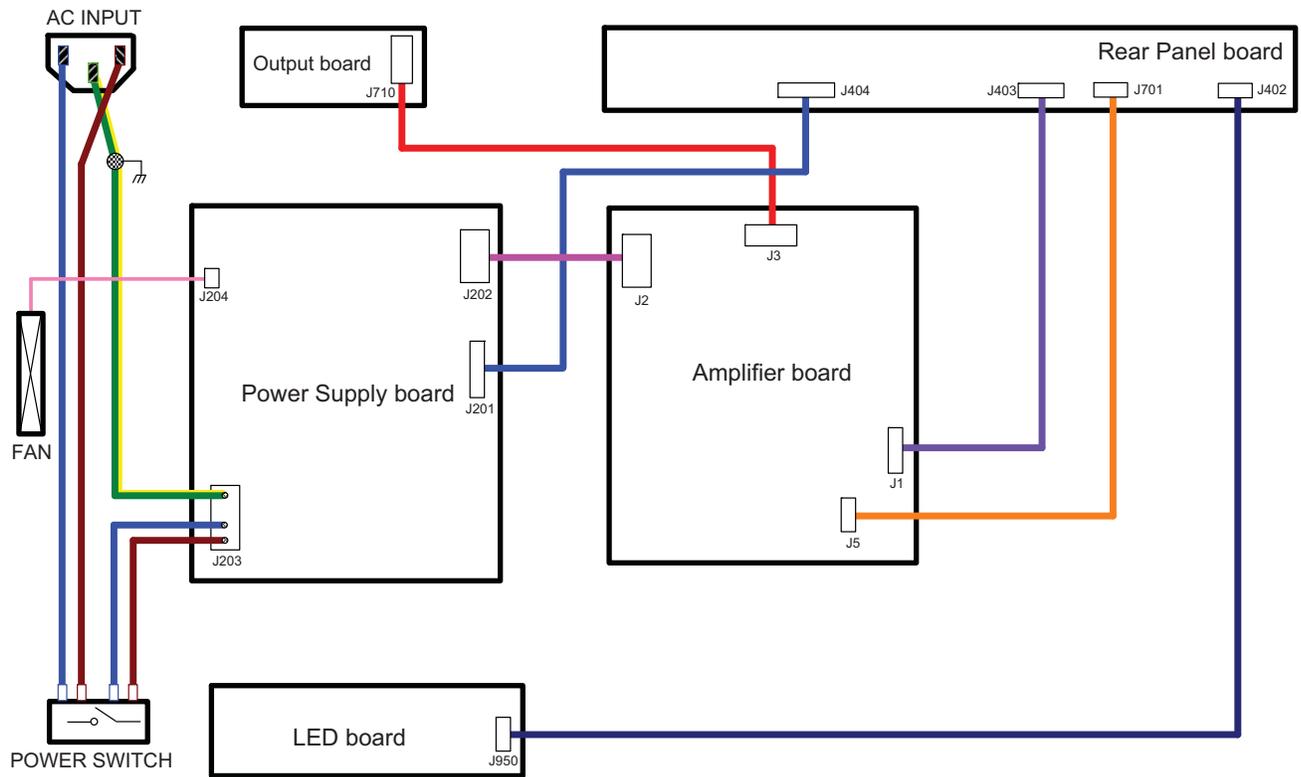


Figure 8. ZA 2120-HZ Wiring Diagram

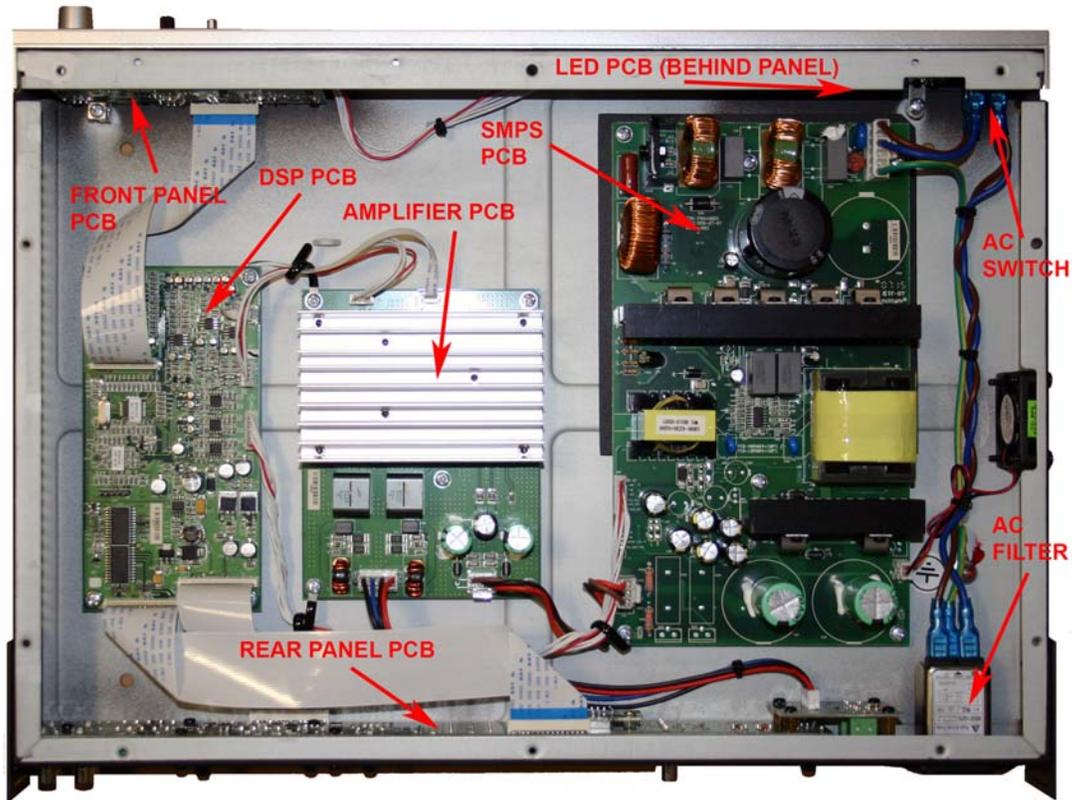


Figure 9. IZA 2120-LZ Chassis View

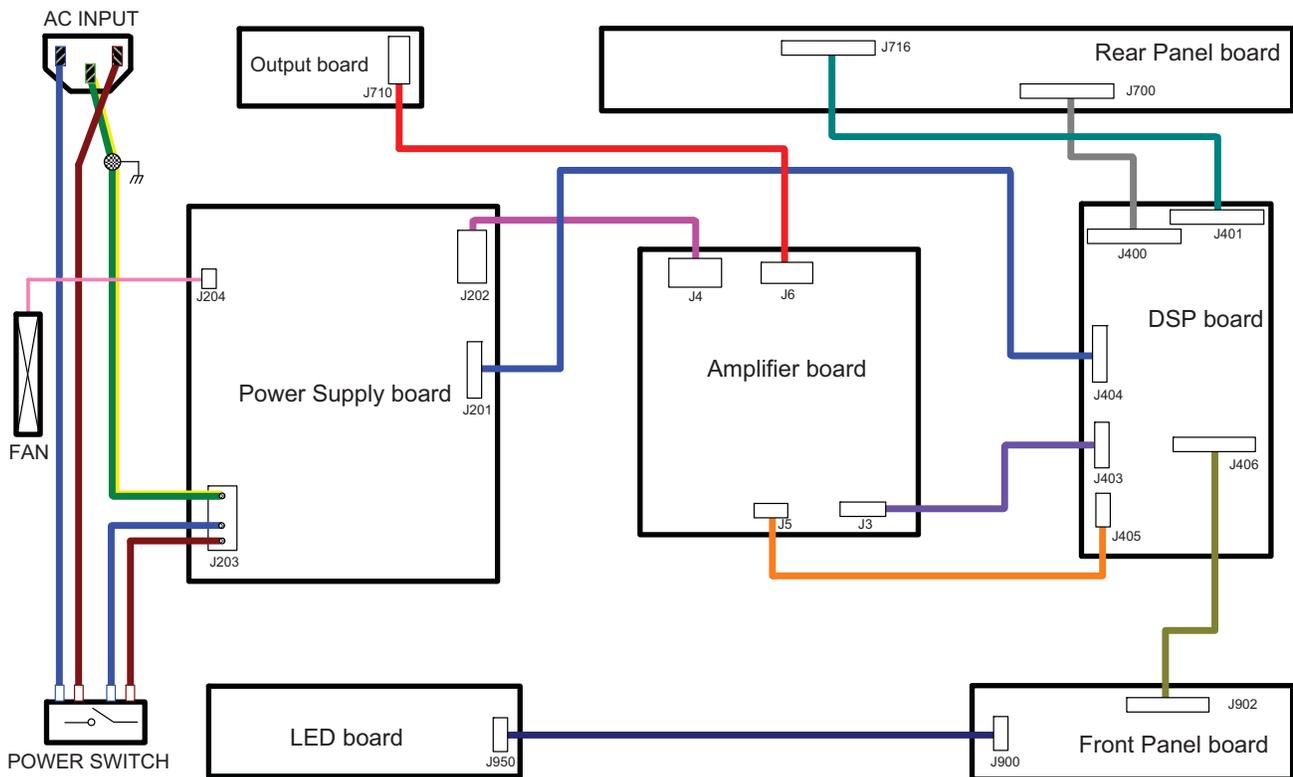


Figure 10. IZA 2120-LZ Wiring Diagram

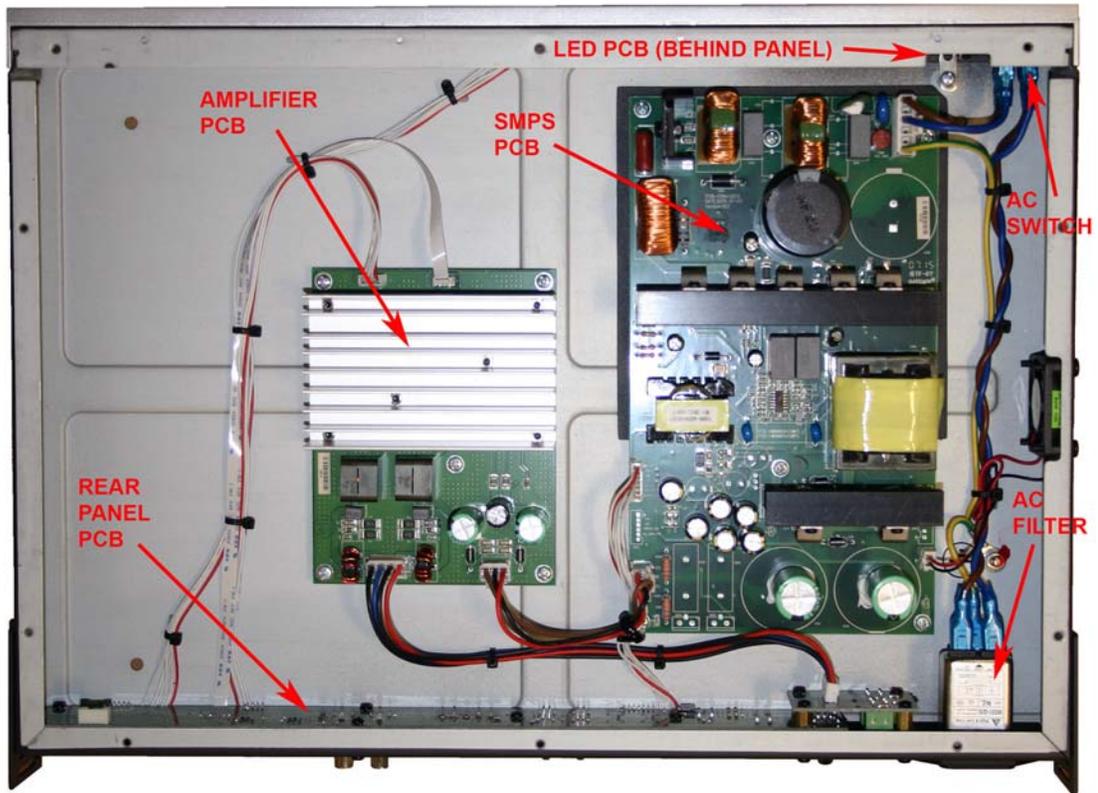


Figure 11. ZA 2120-LZ Chassis View

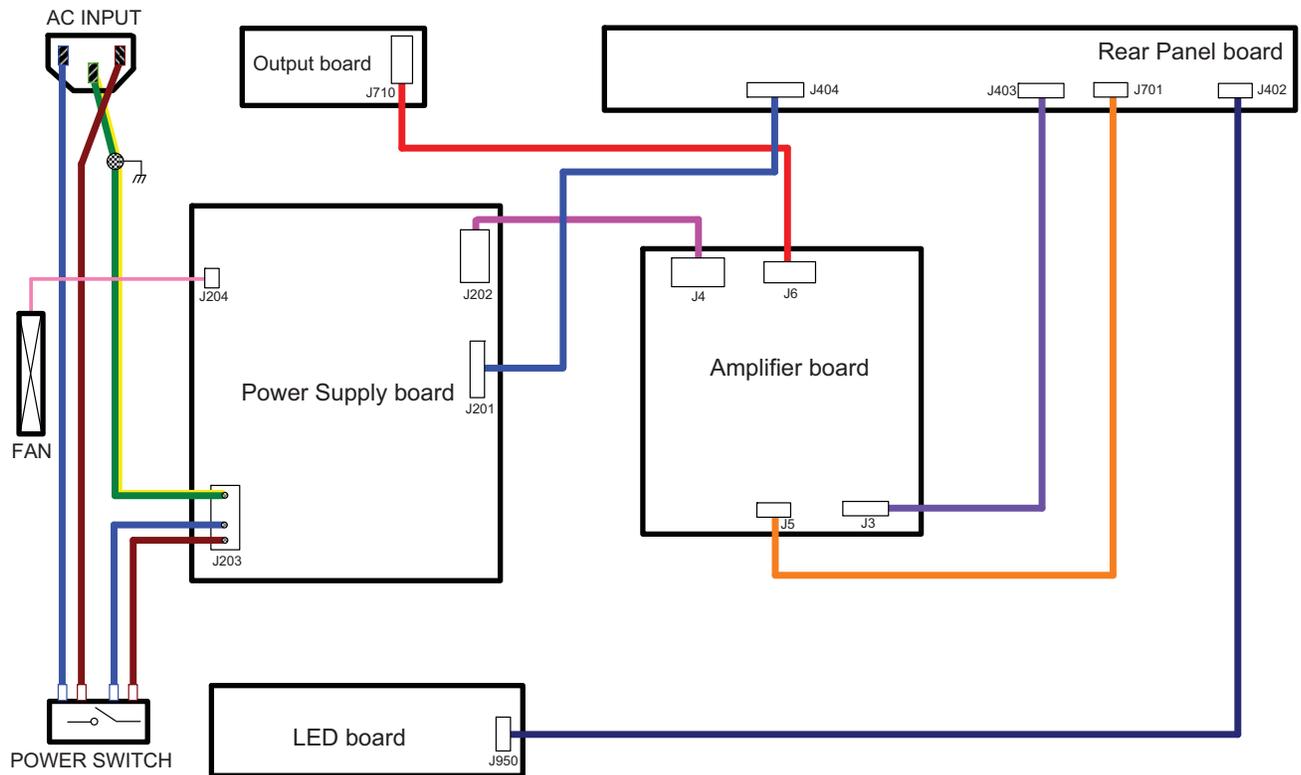


Figure 12. ZA 2120-LZ Wiring Diagram

ELECTRICAL PART LIST

FreeSpace® IZA 2120-HZ and ZA 2120-HZ SMPS PCB Assembly

Resistors

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---------------------------------|--------------------|------|
| R200 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R202 | RMG, 1/16W, 2.2K, 1%, 0603/1608 | 4723-222A | |
| R203 | RMG, 1/16W, 3K, 1%, 0603 | 4723-302A | |
| R204 | RMG, 1/16W, 4.7K, 1%, 0603/1608 | 4723-472A | |
| R206 | RMG, 1/10W, 82R, 5%, 0805 | 4720-820J | |
| R207 | RMG, 1/8W, 330K, 5%, 1206 | 4721-334J | |
| R208 | RMG, 1/8W, 330K, 5%, 1206 | 4721-334J | |
| R209 | RMG, 1/8W, 330K, 5%, 1206 | 4721-334J | |
| R210 | RMG, 1/8W, 330K, 5%, 1206 | 4721-334J | |
| R211 | RMG, 1/8W, 330K, 5%, 1206 | 4721-334J | |
| R212 | RMG, 1/8W, 330K, 5%, 1206 | 4721-334J | |
| R213 | RMG, 1/10W, 91K, 1%, 0603 | 4720-913A | |
| R214 | RMG, 1/10W, 75R, 5%, 0805 | 4720-750J | |
| R215 | RMG, 1/4W, 200K, 1%, 1206 | 4725-204A | |
| R216 | RMG, 1/8W, 0R, 1%, 1206 | 4721-000A | |
| R217 | RMG, 1/16W, 30K, 1%, 0603/1608 | 4723-303A | |
| R220 | RMG, 1/8W, 1.5K, 5%, 1206 | 4721-152J | |
| R221 | RMG, 1/8W, 1.5K, 5%, 1206 | 4721-152J | |
| R222 | RMG, 1/16W, 6.2K, 1%, 0603/1608 | 4723-622A | |
| R223 | RMG, 1/16W, 51K, 1%, 0603/16 | 4723-513A | |
| R224 | RMG, 1/16W, 56K, 1%, 0603 | 4723-563AR | |
| R225 | RMG, 1/16W, 560K, 1%, 0603/1608 | 4723-564A | |
| R226 | RMG, 1/16W, 13K, 1%, 0603 | 4723-133AR | |
| R227 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R228 | RMG, 1/10W, 15R, 1%, 0805 | 4720-150A | |
| R229 | RMG, 1/10W, 15R, 1%, 0805 | 4720-150A | |
| R230 | RMG, 1/10W, 62K, 5%, 0805 | 4720-623J | |
| R232 | RMG, 1/10W, 18K, 5%, 0805 | 4720-183J | |
| R233 | RMG, 1/4W, 100R, 1%, 1206 | 4725-101A | |
| R234 | RMG, 1/4W, 100R, 1%, 1206 | 4725-101A | |
| R235 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A | |
| R236 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A | |
| R240 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A | |
| R241 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A | |
| R242 | RMG, 1/8W, 2.2R, 5%, 1206 | 4721-2R2J | |
| R243 | RMG, 1/8W, 330K, 5%, 1206 | 4721-334J | |
| R244 | RMG, 1/8W, 330K, 5%, 1206 | 4721-334J | |
| R245 | RMG, 1/8W, 330K, 5%, 1206 | 4721-334J | |
| R246 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R248 | RMG, 1/8W, 47R, 5%, 1206 | 4721-470J | |
| R249 | RMG, 1/8W, 47R, 5%, 1206 | 4721-470J | |
| R251 | RMG, 1/8W, 47R, 5%, 1206 | 4721-470J | |
| R253 | RMG, 1W, 20K, 5%, 2512 | 4728-203J | |
| R254 | RMG, 1/4W, 5.1K, 5%, 1206 | 4725-512J | |
| R257 | RMG, 1/4W, 5.1K, 5%, 1206 | 4725-512J | |
| R262 | RMG, 1/16W, 10R, 1%, 0603 | 4723-100AR | |
| R263 | RMG, 1/16W, 10R, 1%, 0603 | 4723-100AR | |
| R264 | RMG, 1/16W, 10R, 1%, 0603 | 4723-100AR | |
| R265 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R266 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R267 | RMG, 1W, 20K, 5%, 2512 | 4728-203J | |
| R268 | RMG, 1/10W, 100R, 1%, 0805 | 4720-101A | |

ELECTRICAL PART LIST

FreeSpace® IZA 2120-HZ and ZA 2120-HZ SMPS PCB Assembly

Resistors (continued)

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|--|--------------------|------|
| R270 | RMG, 1/16W, 100R, 1%, 0603 | 4723-101A | |
| R271 | RMG, 1/16W, 100R, 1%, 0603 | 4723-101A | |
| R272 | RMG, 1/16W, 100K, 1%, 0603 | 4723-104AR | |
| R273 | RMG, 1/16W, 100K, 1%, 0603 | 4723-104AR | |
| R274 | RMG, 1/4W, 200K, 1%, 1206 | 4725-204A | |
| R275 | RMG, 1/16W, 100K, 1%, 0603 | 4723-104AR | |
| R276 | RMG, 1/16W, 100K, 1%, 0603 | 4723-104AR | |
| R277 | RMG, 1/16W, 100K, 1%, 0603 | 4723-104AR | |
| R278 | RMG, 1/16W, 100K, 1%, 0603 | 4723-104AR | |
| R282 | RCF, 1/4W, 100K, 5%, AT | 4705-104J | |
| R283 | RCF, 1/4W, 100K, 5%, AT | 4705-104J | |
| R284 | RMG, 1/10W, 10K, 1%, 0805 | 4720-103A | |
| R285 | RMG, 1/16W, 1M, 1%, 0603 | 4723-105A | |
| R286 | RMG, 1/16W, 1M, 1%, 0603 | 4723-105A | |
| R287 | RMG, 1W, 0.33R, 1%, 2512 | 4728-R33A | |
| R288 | RMG, 1/16W, 16K, 1%, 0603/1608 | 4723-163A | |
| R289 | RMG, 1/16W, 16K, 1%, 0603/1608 | 4723-163A | |
| R290 | RMG, 1/16W, 470K, 1%, 0603 | 4723-474A | |
| R291 | RMG, 1/16W, 2K, 1%, 0603/1608 | 4723-202A | |
| R292 | RMG, 1/16W, 13K, 1%, 0603 | 4723-133AR | |
| R293 | RMG, 1/16W, 12K, 1%, 0603 | 4723-123AR | |
| R294 | RMG, 1/16W, 12K, 1%, 0603 | 4723-123AR | |
| R297 | RMG, 1/16W, 5.1K, 1%, 0603/1608 | 4723-512A | |
| R298 | RMG, 1/16W, 2K, 1%, 0603/1608 | 4723-202A | |
| R299 | RWR, 3W, 0.06R, 5%, ATSW, NON, INDUCTIVE | 474A-R06JH | |
| R306 | RMG, 1/10W, 220R, 5%, 0805 | 4720-221J | |
| R307 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R308 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R309 | RMG, 1/16W, 1M, 1%, 0603 | 4723-105A | |
| R310 | RMG, 1/16W, 560K, 5%, 0603/1608 | 4723-564J | |
| R311 | RMG, 1/16W, 560K, 5%, 0603/1608 | 4723-564J | |
| R312 | RMG, 1/16W, 16K, 1%, 0603/1608 | 4723-163A | |
| R313 | RMG, 1/16W, 43K, 5%, 0603/1608 | 4723-433J | |
| R323 | RMG, 1/16W, 47K, 1%, 0603 | 4723-473AR | |
| R324 | RMG, 1/16W, 47K, 1%, 0603 | 4723-473AR | |
| R325 | RMG, 1/16W, 47K, 1%, 0603 | 4723-473AR | |
| R326 | RMG, 1/16W, 18K, 1%, 0603/1608 | 4723-183A | |
| R337 | RMG, 1/10W, 6.2K, 1%, 0805 | 4720-622A | |
| R338 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R339 | RMG, 1/4W, 200K, 1%, 1206 | 4725-204A | |
| R340 | RMG, 1/4W, 200K, 1%, 1206 | 4725-204A | |
| R345 | RCF, 1/4W, 100K, 5%, AT | 4705-104J | |
| R346 | RCF, 1/4W, 100K, 5%, AT | 4705-104J | |
| R347 | RMG, 1/8W, 330K, 5%, 1206 | 4721-334J | |
| R348 | RMG, 1/16W, 4.7K, 1%, 0603/1608 | 4723-472A | |
| R349 | RMF, 1W, 56K, 5%, ATS, METAL, OXIDE | 4718-563JX | |
| R350 | RMF, 1W, 56K, 5%, ATS, METAL, OXIDE | 4718-563JX | |
| R353 | RMG, 1/8W, 100R, 1%, 1206 | 4721-101A | |
| R354 | RMG, 1/16W, 100R, 1%, 0603 | 4723-101A | |
| R356 | VARISTOR, 320V, 10%, 6KV, 3KA, 10MM, RL | 4735-0016 | |
| R357 | RMG, 1/8W, 330K, 5%, 1206 | 4721-334J | |
| R358 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A | |

ELECTRICAL PART LIST

FreeSpace® IZA 2120-HZ and ZA 2120-HZ SMPS PCB Assembly

Resistors (continued)

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|-------------------------------|--------------------|------|
| R359 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A | |
| R360 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A | |
| R361 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A | |
| R362 | RMG, 1/16W, 47K, 1%, 0603 | 4723-473AR | |
| R363 | RMG, 1/8W, 4.7R, 1%, 1206 | 4721-4R7A | |
| R364 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A | |
| R365 | RMG, 1/8W, 47R, 5%, 1206 | 4721-470J | |

Capacitors

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|--|--------------------|--|
| C200 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C201 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C202 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C204 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C205 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C206 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C207 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C208 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C209 | CC, 50V, 1000pF, 5%, 0603, X7R | 150F-102JAC | |
| C210 | CC, 50V, 1000pF, 5%, 0603, X7R | 150F-102JAC | |
| C211 | CC, 50V, 1000pF, 5%, 0603, X7R | 150F-102JAC | |
| C212 | CC, 50V, 1000pF, 5%, 0603, X7R | 150F-102JAC | |
| C213 | CC, 50V, 120pF, 5%, 0603, C0G | 150F-121JAC | |
| C214 | CE, 50V, 10uF, 20%, RLT, 5X11, 105C, RX | 157F-106MIUTU | |
| C215 | CC, 25V, 10uF, 10%, 1206, 3.2X1.6, X5R | 150E-106KCF | |
| C216 | CC, 25V, 10uF, 10%, 1206, 3.2X1.6, X5R | 150E-106KCF | |
| C218 | CC, 50V, 0.01uF, 5%, 0603 | 150F-103JAC | |
| C219 | CC, 50V, 0.01uF, 5%, 0603 | 150F-103JAC | |
| C220 | CE, 220V, 1000uF, 20%, RL, 35X30, SNAP-105C | 1576-108M^\$T | |
| C221 | CE, 220V, 1000uF, 20%, RL, 35X30, SNAP-105C | 1576-108M^\$T | |
| C225 | CC, 500V, 0.022uF, 10%, 1206 | 150L-223KCF | |
| C226 | CC, 500V, 0.022uF, 10%, 1206 | 150L-223KCF | |
| C227 | CC, 630V, 0.1uF, 10%, 1812, X7R | 150M-104KHF | |
| C232 | CC, 100V, 100pF, 10%, 0805, 1.2X2, NPO | 150H-101KBD | |
| C234 | CC, 100V, 100pF, 10%, 0805, 1.2X2, NPO | 150H-101KBD | |
| C235 | CC, 100V, 100pF, 10%, 0805, 1.2X2, NPO | 150H-101KBD | |
| C239 | CE, 35V, 100uF, 20%, RLT, 6.3X11, 105C, LOW, ESR | 157Q-107MLUTR | |
| C243 | CC, 630V, 100pF, 5%, 1206, 3.2X1.6 | 150M-101JCF | |
| C244 | CC, 630V, 100pF, 5%, 1206, 3.2X1.6 | 150M-101JCF | |
| C245 | CC, 630V, 100pF, 5%, 1206, 3.2X1.6 | 150M-101JCF | |
| C246 | CC, 630V, 100pF, 5%, 1206, 3.2X1.6 | 150M-101JCF | |
| C247 | CC, 400V, 470pF, +20%, RL, 9.5X8.0, AH09B471KLO | 150T-471MRO | 3  |
| C248 | CC, 400V, 470pF, +20%, RL, 9.5X8.0, AH09B471KLO | 150T-471MRO | 3  |
| C249 | CE, 450V, 220uF, 20%, RL, 35X30, SNAP-105C | 1574-227M^\$T | |
| C251 | CP, 275V, 0.47uF, 20%, RB, 18X16 | 158Z-474M75 | |
| C252 | CP, 275V, 0.47uF, 20%, RB, 18X16 | 158Z-474M75 | |

ELECTRICAL PART LIST

FreeSpace® IZA 2120-HZ and ZA 2120-HZ SMPS PCB Assembly

Capacitors (continued)

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|--|--------------------|------|
| C254 | CC, 1000V, 2200P, 10%, 1206, X7R | 150N-222KCF | |
| C255 | CC, 1000V, 2200P, 10%, 1206, X7R | 150N-222KCF | |
| C256 | CC, 50V, 1500pF, 10%, 0805, 1.2x2.0 | 150F-152KBD | |
| C257 | CM, 400V, 0.47U, 5%RB, 16X16, X7, METALLIZED, FARATRONIC | 153T-474J55M4 | |
| C259 | CC, 50V, 0.1uF, 10%, 0805, 1.2X2.0 | 150F-104KBD | |
| C260 | CC, 50V, 0.1uF, 10%, 0805, 1.2X2.0 | 150F-104KBD | |
| C261 | CC, 50V, 0.1uF, 10%, 0805, 1.2X2.0 | 150F-104KBD | |
| C262 | CC, 50V, 0.1uF, 10%, 0805, 1.2X2.0 | 150F-104KBD | |
| C264 | CC, 50V, 2200P, 5%, 0603, 0.8X1.6 | 150F-222JAC | |
| C265 | CC, 50V, 0.47U, 10%, 0805, 1.25X2, X7R | 150F-474KBD | |
| C266 | CC, 50V, 0.1uF, 10%, 0805, 1.2X2.0 | 150F-104KBD | |
| C267 | CE, 25V, 470U, 20%, RLT, 10X16, 105C, RX, NOVER | 157E-477MS5TU | |
| C268 | CE, 25V, 470U, 20%, RLT, 10X16, 105C, RX, NOVER | 157E-477MS5TU | |
| C269 | CE, 25V, 470U, 20%, RLT, 10X16, 105C, RX, NOVER | 157E-477MS5TU | |
| C270 | CE, 25V, 470U, 20%, RLT, 10X16, 105C, RX, NOVER | 157E-477MS5TU | |
| C271 | CE, 35V, 100U, 20%, RLT, 6.3X11, 105C, LOW ESR | 157Q-107MLUTR | |
| C273 | CC, 50V, 0.47U, 10%, 0805, 1.25X2, X7R | 150F-474KBD | |
| C274 | CC, 500V, 0.022U, 10%, 1206 | 150L-223KCF | |
| C275 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101JAC | |
| C276 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101JAC | |
| C277 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101JAC | |
| C278 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101JAC | |
| C279 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101JAC | |
| C280 | CE, 35V, 47U, 20%, RLT, 6.3X11, 105C, RX, NOVER | 157Q-476MLUTU | |
| C282 | CM, 630V, 0.1U, 10%, RB, 17X16X10, P15, FARATRONIC | 153M-104K654 | |
| C283 | CM, 630V, 0.1U, 10%, RB, 17X16X10, P15, FARATRONIC | 153M-104K654 | |
| C284 | CC, 50V, 1U, 10%, 0805 | 150F-105KBD | |
| C285 | CC, 50V, 0.01U, 5%, 0603 | 150F-103JAC | |
| C287 | CC, 250V, 0.1U, 10%, X7R, 1206, 1.6X3.2 | 150R-104KCF | |
| C288 | CC, 250V, 0.1U, 10%, X7R, 1206, 1.6X3.2 | 150R-104KCF | |
| C289 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C290 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C293 | CC, 50V, 0.01U, 5%, 0603 | 150F-103JAC | |
| C294 | CC, 50V, 0.01U, 5%, 0603 | 150F-103JAC | |
| C295 | CC, 50V, 0.01U, 5%, 0603 | 150F-103JAC | |
| C296 | CE, 16V, 470U, 20%, RLT, 10X12.5, 105C, LOW, ESR | 157D-477MSXTR | |
| C297 | CE, 16V, 470U, 20%, RLT, 10X12.5, 105C, LOW, ESR | 157D-477MSXTR | |
| C298 | CC, 50V, 0.1uF, 10%, 0805, 1.2X2.0 | 150F-104KBD | |
| C299 | CC, 50V, 0.1uF, 10%, 0805, 1.2X2.0 | 150F-104KBD | |
| C303 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C306 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |

ELECTRICAL PART LIST

FreeSpace® IZA 2120-HZ and ZA 2120-HZ SMPS PCB Assembly

Capacitors (continued)

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---|--------------------|------|
| C307 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C308 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C310 | CER2, 1206, X7R, 50V, 100N, PM10, R | 150F-104KCF | |
| C311 | CER2, 1206, X7R, 50V, 100N, PM10, R | 150F-104KCF | |
| C312 | CC, 630V, 0.1U, 10%, 1812, X7R | 150M-104KHF | |
| C313 | CC, 50V, 0.47U, 10%, 0805, 1.25X2, X7R | 150F-474KBD | |
| C314 | CC, 500V, 0.022U, 10%, 1206 | 150L-223KCF | |
| C315 | CC, 630V, 0.1U, 10%, 1812, X7R | 150M-104KHF | |
| C318 | CC, 100V, 100pF, 10%, 0805, 1.2X2, NPO | 150H-101KBD | |
| C319 | CC, 50V, 0.1uF, 10%, 0805, 1.2X2.0 | 150F-104KBD | |
| C320 | CE, 25V, 470U, 20%, RLT, 10X16, 105C, RX, NOVER | 157E-477MS5TU | |
| C321 | CC, 50V, 0.1uF, 10%, 0805, 1.2X2.0 | 150F-104KBD | |
| C322 | CE, 25V, 470U, 20%, RLT, 10X16, 105C, RX, NOVER | 157E-477MS5TU | |
| C323 | CC, 50V, 0.1uF, 10%, 0805, 1.2X2.0 | 150F-104KBD | |

Inductors

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|--|--------------------|------|
| L202 | FERRITE BEAD, CHIP, SEBW201209U121MT, 0805 | 1808-0872 | |
| L203 | FERRITE BEAD, CHIP, SEBW201209U121MT, 0805 | 1808-0872 | |
| L204 | FERRITE BEAD, CHIP, SEBW201209U121MT, 0805 | 1808-0872 | |
| L205 | FERRITE BEAD, CHIP, SEBW201209U121MT, 0805 | 1808-0872 | |
| L208 | FERRITE BEAD, CHIP, SEBW201209U121MT, 0805 | 1808-0872 | |
| L210 | FERRITE BEAD, CHIP, SEBW201209U121MT, 0805 | 1808-0872 | |
| L211 | FERRITE BEAD, CHIP, SEBW201209U121MT, 0805 | 1808-0872 | |
| L212 | FERRITE BEAD, INDUCTOR, BL01RN1A1F1J | 1808-0680 | |
| L213 | FERRITE BEAD, INDUCTOR, BL01RN1A1F1J | 1808-0680 | |

Diodes

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---|--------------------|--|
| BR200 | DIODE, BRIDGE, 600V, 8A, GBU8J, RL | 4840-9211 | 3  |
| D200 | DIODE, IN5408-B, 3A, 1000V | 4805-4080 | |
| D201 | DIODE, SCHOTTKY, SK16, DO-214AA, 60V, 1A, SMD, PANJIT | 480S-K160 | |
| D202 | DIODE, SCHOTTKY, 650V, 6A, IDH06G65C5, TO-220, RL | 4806-5C50 | |
| D203 | DIODE, ULTRAFast, 600V, 16A, ER1606CT, RL, PANJIT | 4800-6CT0 | |
| D204 | DIODE, ULTRAFast, 600V, 16A, ER1606CT, RL, PANJIT | 4800-6CT0 | |

ELECTRICAL PART LIST

FreeSpace® IZA 2120-HZ and ZA 2120-HZ SMPS PCB Assembly

Diodes (continued)

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---|--------------------|------|
| D205 | DIODE, ULTRAFAST, 600V, 16A, ER1606CT, RL, PANJIT | 4800-6CT0 | |
| D206 | DIODE, ULTRAFAST, 600V, 16A, ER1606CT, RL, PANJIT | 4800-6CT0 | |
| D207 | DIODE, SCHOTTKY, 40V, 2A, SK24, SMB, SM, PANJIT | 480S-K240 | |
| D208 | DIODE, BAV99, SOT23, PHILIPS | 4840-8970 | |
| D209 | DIODE, ULTRA, 600V, 1A, MURS160T3, SMB, CASE403A, SM | 4806-0T30 | |
| D210 | DIODE, ULTRA, 600V, 1A, MURS160T3, SMB, CASE403A, SM | 4806-0T30 | |
| D211 | DIODE, ULTRA, 600V, 1A, MURS160T3, SMB, CASE403A, SM | 4806-0T30 | |
| D212 | DIODE, ULTRA, 600V, 1A, MURS160T3, SMB, CASE403A, SM | 4806-0T30 | |
| D213 | DIODE, SUPPRESSOR, 200V, P6KE200A, AT | 4802-00A0 | |
| D214 | DIODE, 600V, 1A, 75NS, US1J, SOD124 | 480U-S1J0 | |
| D216 | DIODE, FAST, 75V, 0.5A, BAS316, SOD323, SM | 480S-3160 | |
| D217 | DIODE, FAST, 75V, 0.5A, BAS316, SOD323, SM | 480S-3160 | |
| D218 | DIODE, FAST, 75V, 0.5A, BAS316, SOD323, SM | 480S-3160 | |
| D219 | DIODE, FAST, 75V, 0.5A, BAS316, SOD323, SM | 480S-3160 | |
| D223 | DIODE, RECT, 200V, 2A, ER2D, SMB/DO-214AA, SM | 480E-R2D0 | |
| D224 | DIODE, RECT, 200V, 2A, ER2D, SMB/DO-214AA, SM | 480E-R2D0 | |
| D226 | RECTIFIER, ES1D, 200V, 1.1A, SMD | 4840-9190 | |
| D228 | RECTIFIER, ES1D, 200V, 1.1A, SMD | 4840-9190 | |
| D232 | DIODE, SCHOTTKY, SK16, DO-214AA, 60V, 1A, SMD, PANJIT | 480S-K160 | |
| DZ202 | DZ, 1/2W, 15V, 5%, SOD-123C, MMSZ5245BT1G | 4837-15V9 | |
| Z200 | DZ, 1/2W, 15V, 5%, SOD-123C, MMSZ5245BT1G | 4837-15V9 | |
| Z201 | DZ, 1/2W, 18V, 5%, SOD-123C, MMSZ5248BT1G | 4837-18V9 | |
| Z203 | DZ, 1/2W, 18V, 5%, SOD-123C, MMSZ5248BT1G | 4837-18V9 | |
| Z204 | DZ, 1/2W, 12V, 5%, SM | 4837-1209 | |

Transistors

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|--|--------------------|------|
| Q200 | MOSFET, N-CH, 600V, 12A, FQPF12N60C, TO-220F, RL | 490N-60C0 | |
| Q201 | MOSFET, N-CH, 600V, 12A, FQPF12N60C, TO-220F, RL | 490N-60C0 | |
| Q205 | TR, NPN, BCP56-10, SOT223 | 485C-P560 | |
| Q206 | MOSFET, N-CH, 800V, TK6A80E, 6A, TO-220SIS, RL | 490A-80E0 | |
| Q207 | TR, 3904, HFE, 100-300, SM | 4860-0640 | |
| Q208 | TR, 3904, HFE, 100-300, SM | 4860-0640 | |
| Q209 | MOSFET, N-CH, 600V, 10A, STP11NM60ND, TO-220, RL | 4906-0ND0 | |
| Q211 | TR, NPN, BCP56-10, SOT223 | 485C-P560 | |
| Q212 | MOSFET, N-CH, 60V, 115MA, 2N7002, SOT-23, SM | 4907-0020 | |

ELECTRICAL PART LIST

FreeSpace® IZA 2120-HZ and ZA 2120-HZ SMPS PCB Assembly

Transistors (continued)

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---|--------------------|------|
| Q213 | TR, 3904, HFE, 100-300, SM | 4860-0640 | |
| Q214 | TR, MMBTA92, PNP, SOT23, KEC | 4860-5360 | |
| Q215 | TR, NPN, 2SC2655Y, HFE, 40, TO-92MOD, RLT | 4856-55Y0 | |
| Q216 | TR, MMBTA42-7-F, NPN, SMD, SOT23 | 485T-A420 | |

Integrated Circuits

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|--|--------------------|--|
| U200 | IC, DRIVER, NCP5181DR2G, SOIC-8 | 3132-8471 | |
| U201 | IC, LM19, THERMAL, SENSOR, TO-92, NS | 3132-2581 | |
| U202 | IC, LM339, SMD, COMPARATORS | 3132-1250 | |
| U203 | PHOTOCOUPLER, EL817S1, S1 | 4818-17S1 | |
| U204 | PHOTOCOUPLER, EL817S1, S1 | 4818-17S1 | 3  |
| U205 | PHOTOCOUPLER, EL817S1, S1 | 4818-17S1 | 3  |
| U206 | IC, REGULATOR, 5V, LM78L05ACM, SO-8 | 3131-3390 | |
| U207 | IC, PFC, CONTROLER, IR1155S, SO8 | 3132-9880 | |
| U208 | IC, POWER, NCP1271, SO-8, ONSEMI | 3132-806111 | |
| U209 | IC, LLC, SMPS, UCC25600, SOIC-8 | 3132-8371 | |
| U210 | IC, REGULATOR, TL432BIDBZR, SOT-23-3, TI | 3132-769116 | |
| U211 | IC, REGULATOR, TL432BIDBZR, SOT-23-3, TI | 3132-769116 | |
| U212 | PHOTOCOUPLER, EL817S1, S1 | 4818-17S1 | 3  |
| U213 | IC, NJM78M05DL1A-#ZZZB, REGULATOR | 3132-2101 | |

Miscellaneous

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---|--------------------|--|
| CLAMP, SMPS | CLAMP, IC, SUS301, T=1, NATURAL, 3/4H | 4136-0932 | |
| F200 | FUSE, 4A, 250V, 8.5X8, EU/CC, C, RLT | 5120-1180 | 3  |
| HEATSINK | SCREW, MACHINE, BIND, HEAD, M3X8, CROSS-RECESS, BZ | 2904-3008 | |
| HS, SMPS | HEATSINK, SMPS, 14X30, L120, AL-EXT, ANODIZE, BLACK | 5401-0701 | |
| HS, SMPS | HEATSINK, SMPS, 14X30, L=70, AL-EXT, ANODIZE, BLACK | 5401-0702 | |
| HS200 | HEATSINK, IC, 25.4X12.7X30, AL, PLATE, MSMGMA100 | 5401-0181 | |
| J201 | 7, PIN, WAFER, P2.0(COULUMB) | 2102-070S | |
| J202 | WAFER, 4P, P3.96, STRAIGHT, MALE | 2101-3053 | |
| J203 | WAFER, 3P, P7.92/11.88, STRAIGHT | 2101-3097 | |
| J204 | JM24182-2P, WAFER | 2101-9120 | |
| NTC200 | THERMISTOR, NTC, 10R, 20%, 240VAC, 5A, -40-200C, AL | 5202-0028 | 3  |
| NUT | NUT, HEX, M3X22X5.4, YZ | 2640-3022 | |

ELECTRICAL PART LIST

FreeSpace® IZA 2120-HZ and ZA 2120-HZ SMPS PCB Assembly

Miscellaneous (continued)

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---|--------------------|--|
| SCREW | SCREW, M3X10, W/S&F, WASHER, (BLK) | 2900-3010 | |
| SCREW, M3 | SCREW, MACHINE, PAN, M3X8, CROSS-RECESS, BZ | 2900-3008 | |
| SILICON | INSULATN-SHEET, SIL-PAD, 800, 18X13 | 3101-0611 | |
| T200 | TRANS, PWR, 385V/160V, 300W, 1A, ER40 | 1806-4233 | 3  |
| T201 | CHOKE, COMMON, MODE, 10MH, MIN, 5A, AT | 1805-0090 | 3  |
| T202 | CHOKE, COIL, 940UH, 15%, 8A, MIN | 1805-0520 | 3  |
| T203 | CHOKE, COMMON, MODE, 10MH, MIN, 5A, AT | 1805-0090 | 3  |
| T204 | TRANS, PWR, 385V, 40W, ER28 | 1806-4236 | 3  |
| WASHER | WASHER, METAL, ID, 3.3, OD8, T=0.5 | 2600-3005 | |

ELECTRICAL PART LIST

FreeSpace® IZA 2120-HZ and ZA 2120-HZ Amplifier PCB Assembly

Resistors

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---------------------------------|--------------------|------|
| R1 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R2 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R3 | RMG, 1/16W, 30K, 1%, 0603/1608 | 4723-303A | |
| R4 | RMG, 1/16W, 330K, 5%, 0603/1608 | 4723-334J | |
| R5 | RMG, 1/16W, 330K, 5%, 0603/1608 | 4723-334J | |
| R6 | RMG, 1/16W, 30K, 1%, 0603/1608 | 4723-303A | |
| R7 | RMG, 1/16W, 100K, 1%, 0603 | 4723-104AR | |
| R8 | RMG, 1/16W, 30K, 1%, 0603/1608 | 4723-303A | |
| R9 | RMG, 1/16W, 47K, 1%, 0603 | 4723-473AR | |
| R10 | RMG, 1/16W, 47K, 1%, 0603 | 4723-473AR | |
| R12 | RMG, 1/16W, 5.1K, 1%, 0603/1608 | 4723-512A | |
| R13 | RMG, 1/16W, 5.1K, 1%, 0603/1608 | 4723-512A | |
| R14 | RMG, 1/16W, 5.1K, 1%, 0603/1608 | 4723-512A | |
| R15 | RMG, 1/16W, 5.1K, 1%, 0603/1608 | 4723-512A | |
| R16 | RMG, 1/16W, 5.1K, 1%, 0603/1608 | 4723-512A | |
| R17 | RMG, 1/16W, 7.5K, 1%, 0603/1608 | 4723-752A | |
| R18 | RMG, 1/16W, 7.5K, 1%, 0603/1608 | 4723-752A | |
| R19 | RMG, 1/4W, 200K, 1%, 1206 | 4725-204A | |
| R20 | RMG, 1/4W, 200K, 1%, 1206 | 4725-204A | |
| R21 | RMG, 1/16W, 56K, 1% | 4723-563A | |
| R22 | RMG, 1/16W, 510R, 1%, 0603 | 4723-511A | |
| R23 | RMG, 1/16W, 510R, 1%, 0603 | 4723-511A | |
| R24 | RMF, 1/10W, 150K, 1%, 0805 | 4720-154A | |
| R25 | RMF, 1/10W, 150K, 1%, 0805 | 4720-154A | |
| R26 | RMG, 1/16W, 7.5K, 1%, 0603/1608 | 4723-752A | |
| R27 | RMG, 1/16W, 7.5K, 1%, 0603/1608 | 4723-752A | |
| R28 | RMG, 1/10W, 20K, 1%, 0603 | 4720-203A | |
| R29 | RMG, 1/10W, 20K, 1%, 0603 | 4720-203A | |
| R30 | RMG, 1/10W, 20K, 1%, 0603 | 4720-203A | |
| R31 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R32 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R33 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A | |
| R34 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A | |
| R35 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A | |
| R36 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A | |
| R37 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A | |
| R38 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R39 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A | |
| R40 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A | |
| R41 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R42 | RMG, 1/8W, 330K, 5%, 1206 | 4721-334J | |
| R43 | RMG, 1/8W, 330K, 5%, 1206 | 4721-334J | |
| R44 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R45 | RMG, 1/8W, 680K, 1%, 1206 | 4721-684A | |
| R46 | RMG, 1/8W, 680K, 1%, 1206 | 4721-684A | |
| R47 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R48 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R49 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R50 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R51 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R52 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R53 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |

ELECTRICAL PART LIST

FreeSpace® IZA 2120-HZ and ZA 2120-HZ Amplifier PCB Assembly

Resistors (continued)

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---------------------------------|--------------------|------|
| R54 | RMG, 1/16W, 7.5K, 1%, 0603/1608 | 4723-912A | |
| R55 | RMG, 1/16W, 7.5K, 1%, 0603/1608 | 4723-912A | |
| R56 | RMG, 1/16W, 7.5K, 1%, 0603/1608 | 4723-912A | |
| R57 | RMG, 1/16W, 7.5K, 1%, 0603/1608 | 4723-912A | |
| R58 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R59 | RMG, 1/10W, 100R, 1%, 0805 | 4720-101A | |
| R60 | RMG, 1/10W, 100R, 1%, 0805 | 4720-101A | |
| R61 | RMG, 1/8W, 10R, 1%1206 | 4721-100A | |
| R62 | RMG, 1/8W, 10R, 1%1206 | 4721-100A | |
| R63 | RMG, 1/8W, 10R, 1%1206 | 4721-100A | |
| R64 | RMG, 1/8W, 10R, 1%1206 | 4721-100A | |
| R65 | RMG, 1/16W, 100K, 1%, 0603 | 4723-104AR | |
| R66 | RMG, 1/16W, 100K, 1%, 0603 | 4723-104AR | |
| R67 | RMG, 1/16W, 100K, 1%, 0603 | 4723-104AR | |
| R72 | RMG, 1/16W, 1M, 1%, 0603 | 4723-105A | |
| R73 | RMG, 1W, 20K, 5%, 2512 | 4728-203J | |
| R74 | RMG, 1W, 20K, 5%, 2512 | 4728-203J | |
| R75 | RMG, 1W, 20K, 5%, 2512 | 4728-203J | |
| R76 | RMG, 1W, 20K, 5%, 2512 | 4728-203J | |
| R78 | RMG, 1/16W, 1M, 1%, 0603 | 4723-105A | |
| R79 | RMG, 1/16W, 1M, 1%, 0603 | 4723-105A | |
| R80 | RMG, 1/16W, 1M, 1%, 0603 | 4723-105A | |
| R81 | RMG, 1/16W, 12K, 1%, 0603 | 4723-123AR | |
| R82 | RMG, 1/16W, 12K, 1%, 0603 | 4723-123AR | |
| R83 | RMG, 1/10W, 100K, 1%, 0805 | 4720-104A | |
| R84 | RMG, 1/10W, 100K, 1%, 0805 | 4720-104A | |
| R85 | RMG, 1/10W, 51R, 1%, 0805 | 4720-510A | |
| R86 | RMG, 1/10W, 51R, 1%, 0805 | 4720-510A | |
| R87 | RWR, 5W, 50R, 5%, AL, VERTICAL | 474B-500J | |
| R88 | RWR, 5W, 50R, 5%, AL, VERTICAL | 474B-500J | |
| R89 | RMG, 1/10W, 499K, 1%, 0805 | 4720-4993 | |
| R90 | RMG, 1/10W, 499K, 1%, 0805 | 4720-4993 | |
| R99 | RMG, 1/4W, 200K, 1%, 1206 | 4725-204A | |
| R100 | RMG, 1/4W, 200K, 1%, 1206 | 4725-204A | |
| R101 | RMG, 1/4W, 47K, 1%, 1206 | 4725-473A | |
| R102 | RMG, 1/4W, 47K, 1%, 1206 | 4725-473A | |
| R103 | RMG, 1/4W, 47K, 1%, 1206 | 4725-473A | |
| R104 | RMG, 1/4W, 47K, 1%, 1206 | 4725-473A | |
| R105 | RMG, 1W, 47R, 5%, 2512 | 4728-470J | |
| R106 | RMG, 1/16W, 5.1K, 1%, 0603/1608 | 4723-512A | |
| R107 | RMG, 1/4W, 47K, 1%, 1206 | 4725-473A | |
| R108 | RMG, 1/4W, 47K, 1%, 1206 | 4725-473A | |
| R109 | RMG, 1/4W, 47K, 1%, 1206 | 4725-473A | |
| R11 | RMG, 1/16W, 5.1K, 1%, 0603/1608 | 4723-512A | |
| R110 | RMG, 1/4W, 47K, 1%, 1206 | 4725-473A | |
| R111 | RMG, 1W, 47R, 5%, 2512 | 4728-470J | |
| R112 | RMG, 1/16W, 1M, 1%, 0603 | 4723-105A | |
| R113 | RMG, 1/16W, 1M, 1%, 0603 | 4723-105A | |

ELECTRICAL PART LIST

FreeSpace® IZA 2120-HZ and ZA 2120-HZ Amplifier PCB Assembly

Capacitors

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|--|--------------------|------|
| C1 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C2 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C3 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C4 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C5 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C6 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C7 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C8 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C9 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C10 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C11 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C12 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C13 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C14 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C15 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C16 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C25 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C26 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C27 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C28 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C29 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C30 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C31 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C32 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C33 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C34 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C35 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C36 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C37 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C38 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C40 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C41 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C42 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C43 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C44 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C45 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C46 | CC, 25V, 10U, 10%, 1206, 3.2X1.6, X5R | 150E-106KCF | |
| C47 | CC, 25V, 10U, 10%, 1206, 3.2X1.6, X5R | 150E-106KCF | |
| C50 | CC, 25V, 10U, 10%, 1206, 3.2X1.6, X5R | 150E-106KCF | |
| C51 | CC, 25V, 10U, 10%, 1206, 3.2X1.6, X5R | 150E-106KCF | |
| C52 | CC, 25V, 10U, 10%, 1206, 3.2X1.6, X5R | 150E-106KCF | |
| C53 | CC, 25V, 10U, 10%, 1206, 3.2X1.6, X5R | 150E-106KCF | |
| C54 | CC, 25V, 10U, 10%, 1206, 3.2X1.6, X5R | 150E-106KCF | |
| C55 | CC, 25V, 10U, 10%, 1206, 3.2X1.6, X5R | 150E-106KCF | |
| C57 | CC, 50V, 1U, 10%, 1206, X7R | 150F-105KCFM | |
| C58 | CC, 50V, 1U, 10%, 1206, X7R | 150F-105KCFM | |
| C59 | CC, 50V, 1U, 10%, 1206, X7R | 150F-105KCFM | |
| C61 | CC, 50V, 1U, 10%, 1206, X7R | 150F-105KCFM | |
| C64 | CE, 16V, 100U, 20%, RLT, 6.3X11, 105C, RX, NOVER | 157D-107MLUTU | |
| C65 | CE, 16V, 100U, 20%, RLT, 6.3X11, 105C, RX, NOVER | 157D-107MLUTU | |

ELECTRICAL PART LIST

FreeSpace® IZA 2120-HZ and ZA 2120-HZ Amplifier PCB Assembly

Capacitors (continued)

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---|--------------------|------|
| C66 | CM, 400V, 0.1U, 5%, RB, 17.5X11X5 | 153T-104J7U | |
| C67 | CM, 400V, 0.1U, 5%, RB, 17.5X11X5 | 153T-104J7U | |
| C68 | CM, 400V, 0.1U, 5%, RB, 17.5X11X5 | 153T-104J7U | |
| C69 | CM, 400V, 0.1U, 5%, RB, 17.5X11X5 | 153T-104J7U | |
| C74 | CE, 16V, 10U, 20%, RLT, 5X11 | 157D-106MIU | |
| C75 | CE, 16V, 10U, 20%, RLT, 5X11 | 157D-106MIU | |
| C76 | CE, 6.3V, 330U, 20%, RLT, 8X7 | 157B-337MOM | |
| C77 | CE, 6.3V, 330U, 20%, RLT, 8X7 | 157B-337MOM | |
| C78 | CC, 630V, 1000P, 10%, 1206 | 150M-102KCF | |
| C79 | CC, 630V, 1000P, 10%, 1206 | 150M-102KCF | |
| C80 | CC, 630V, 1000P, 10%, 1206 | 150M-102KCF | |
| C81 | CC, 630V, 1000P, 10%, 1206 | 150M-102KCF | |
| C82 | CC, 630V, 1000P, 10%, 1206 | 150M-102KCF | |
| C83 | CC, 630V, 1000P, 10%, 1206 | 150M-102KCF | |
| C84 | CC, 630V, 1000P, 10%, 1206 | 150M-102KCF | |
| C85 | CC, 630V, 1000P, 10%, 1206 | 150M-102KCF | |
| C86 | CC, 630V, 1000P, 10%, 1206 | 150M-102KCF | |
| C87 | CC, 630V, 1000P, 10%, 1206 | 150M-102KCF | |
| C88 | CC, 250V, 0.1U, 10%, X7R | 150R-104KCF | |
| C89 | CC, 250V, 0.1U, 10%, X7R | 150R-104KCF | |
| C90 | CC, 250V, 0.1U, 10%, X7R | 150R-104KCF | |
| C91 | CC, 250V, 0.1U, 10%, X7R | 150R-104KCF | |
| C92 | CC, 250V, 0.1U, 10%, X7R | 150R-104KCF | |
| C93 | CC, 250V, 0.1U, 10%, X7R | 150R-104KCF | |
| C94 | CC, 250V, 0.1U, 10%, X7R | 150R-104KCF | |
| C95 | CC, 250V, 0.1U, 10%, X7R | 150R-104KCF | |
| C96 | CC, 250V, 0.1U, 10%, X7R | 150R-104KCF | |
| C97 | CC, 250V, 0.1U, 10%, X7R | 150R-104KCF | |
| C98 | CC, 250V, 0.1U, 10%, X7R | 150R-104KCF | |
| C99 | CC, 250V, 0.1U, 10%, X7R | 150R-104KCF | |
| C100 | CC, 50V, 220PF, 5%, 0603, COG | 150F-221JAC | |
| C101 | CC, 50V, 220PF, 5%, 0603, COG | 150F-221JAC | |
| C102 | CC, 50V, 220PF, 5%, 0603, COG | 150F-221JAC | |
| C103 | CC, 50V, 220PF, 5%, 0603, COG | 150F-221JAC | |
| C104 | CC, 50V, 75PF, 5%, 0603, COG | 150F-750JAC | |
| C105 | CC, 50V, 100PF, 5%, 0603, COG | 150F-101JAC | |
| C106 | CC, 50V, 75PF, 5%, 0603, COG | 150F-750JAC | |
| C107 | CC, 50V, 100PF, 5%, 0603, COG | 150F-101JAC | |
| C108 | CC, 50V, 100PF, 5%, 0603, COG | 150F-101JAC | |
| C109 | CC, 50V, 100PF, 5%, 0603, COG | 150F-101JAC | |
| C110 | CE, 250V, 47U, 20%, RLT, 12.5X25, UVR2E470MHA, NCC | 157R-476MX&C | |
| C111 | CE, 250V, 47U, 20%, RLT, 12.5X25, UVR2E470MHA, NCC | 157R-476MX&C | |
| C112 | CE, 250V, 47U, 20%, RLT, 12.5X25, UVR2E470MHA, NCC | 157R-476MX&C | |
| C113 | CE, 250V, 47U, 20%, RLT, 12.5X25, UVR2E470MHA, NCC | 157R-476MX&C | |
| C114 | CC, 630V, 1000P, 10%, 1206 | 150M-102KCF | |
| C115 | CC, 630V, 1000P, 10%, 1206 | 150M-102KCF | |
| C116 | CC, 630V, 1000P, 10%, 1206 | 150M-102KCF | |
| C117 | CC, 630V, 1000P, 10%, 1206 | 150M-102KCF | |

ELECTRICAL PART LIST

FreeSpace® IZA 2120-HZ and ZA 2120-HZ Amplifier PCB Assembly

Capacitors (continued)

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---------------------------------|--------------------|------|
| C118 | CC, 50V, 0.1uF, 10%, 0805 | 150F-104KBD | |
| C119 | CC, 50V, 0.1uF, 10%, 0805 | 150F-104KBD | |
| C120 | CC, 50V, 0.1uF, 10%, 0805 | 150F-104KBD | |
| C121 | CC, 50V, 0.1uF, 10%, 0805 | 150F-104KBD | |
| C122 | CC, 50V, 0.01uF, 10%, 0603, X7R | 150F-103KAC | |
| C123 | CC, 50V, 0.01uF, 10%, 0603, X7R | 150F-103KAC | |

Inductors

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|--|--------------------|------|
| L3 | FERRITE, BEAD, CHIP, SEBW201209U121MT, 0805 | 1808-0872 | |
| L4 | FERRITE, BEAD, CHIP, SEBW201209U121MT, 0805 | 1808-0872 | |
| L5 | FERRITE, BEAD, CHIP, SEBW201209U121MT, 0805 | 1808-0872 | |
| L6 | FERRITE, BEAD, CHIP, SEBW201209U121MT, 0805 | 1808-0872 | |
| L7 | FERRITE, BEAD, CHIP, SEBW201209U121MT, 0805 | 1808-0872 | |
| L8 | FERRITE, BEAD, CHIP, SEBW201209U121MT, 0805 | 1808-0872 | |
| L9 | FERRITE, BEAD, CHIP, SEBW201209U121MT, 0805 | 1808-0872 | |
| L10 | CHOKE, COIL, 60UH, 10%, 6A, MIN | 1805-0510 | |
| L11 | CHOKE, COIL, 60UH, 10%, 6A, MIN | 1805-0510 | |
| L12 | INDUCTOR, 22UH, 20%, 8.1X8, B1000AS-220M=P3, SMD, TOKO | 1803-0103 | |
| L13 | INDUCTOR, 22UH, 20%, 8.1X8, B1000AS-220M=P3, SMD, TOKO | 1803-0103 | |

Diodes

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---|--------------------|------|
| D5 | DIODE, SW, HS, DOUBLE, 0.45A, 75V, 1/4W, BAV70, SOT23, SM | 480A-V700 | |
| D6 | DIODE, SW, HS, DOUBLE, 0.45A, 75V, 1/4W, BAV70, SOT23, SM | 480A-V700 | |
| D7 | DIODE, SW, HS, DOUBLE, 0.45A, 75V, 1/4W, BAV70, SOT23, SM | 480A-V700 | |
| D8 | DIODE, 200V, 0.2A, BAV21W, SOD-123, SMD, PANJIT | 480V-21W0 | |
| D9 | DIODE, 200V, 0.2A, BAV21W, SOD-123, SMD, PANJIT | 480V-21W0 | |
| D10 | DIODE, LL4148, SM | 4804-1480 | |
| D11 | DIODE, LL4148, SM | 4804-1480 | |
| D12 | DIODE, ULTRA, 600V, 1A, MURS, 160T3, SMB, CASE403A, SM | 4806-0T30 | |
| D13 | DIODE, ULTRA, 600V, 1A, MURS, 160T3, SMB, CASE403A, SM | 4806-0T30 | |
| D14 | DIODE, LL4148, SM | 4804-1480 | |
| D15 | DIODE, LL4148, SM | 4804-1480 | |

ELECTRICAL PART LIST

FreeSpace® IZA 2120-HZ and ZA 2120-HZ Amplifier PCB Assembly

Diodes (continued)

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---|--------------------|------|
| D16 | DIODE, FAST, 75V, 0.5A, BAS316, SOD323, SM | 480S-3160 | |
| D18 | DIODE, FAST, 75V, 0.5A, BAS316, SOD323, SM | 480S-3160 | |
| D19 | DIODE, FAST, 75V, 0.5A, BAS316, SOD323, SM | 480S-3160 | |
| D20 | DIODE, FAST, 75V, 0.5A, BAS316, SOD323, SM | 480S-3160 | |
| D21 | DIODE, FAST, 75V, 0.5A, BAS316, SOD323, SM | 480S-3160 | |
| D22 | DIODE, LL4148, SM | 4804-1480 | |
| D23 | DIODE, LL4148, SM | 4804-1480 | |
| D24 | DIODE, LL4148, SM | 4804-1480 | |
| D25 | DIODE, LL4148, SM | 4804-1480 | |
| Z1 | DIODE, 200V, 0.2A, BAV21W, SOD-123, SMD, PANJIT | 4837-4V38 | |
| Z2 | DIODE, 200V, 0.2A, BAV21W, SOD-123, SMD, PANJIT | 4837-4V38 | |
| Z3 | DIODE, 200V, 0.2A, BAV21W, SOD-123, SMD, PANJIT | 4837-4V38 | |

Transistors

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---|--------------------|------|
| Q1 | TR, 3904, HFE, 100-300, SM | 4860-0640 | |
| Q2 | TR, 3904, HFE, 100-300, SM | 4860-0640 | |
| Q3 | TR, 3904, HFE, 100-300, SM | 4860-0640 | |
| Q4 | TR, 3904, HFE, 100-300, SM | 4860-0640 | |
| Q5 | TR, 3904, HFE, 100-300, SM | 4860-0640 | |
| Q6 | TR, 3904, HFE, 100-300, SM | 4860-0640 | |
| Q7 | TR, 3904, HFE, 100-300, SM | 4860-0640 | |
| Q8 | TR, 3906, PNP, SM | 4853-9060 | |
| Q10 | MOSFET, N-CH, 400V, IRF740, 10A, TO-220, RL | 490F-7400 | |
| Q11 | MOSFET, N-CH, 400V, IRF740, 10A, TO-220, RL | 490F-7400 | |
| Q12 | MOSFET, N-CH, 400V, IRF740, 10A, TO-220, RL | 490F-7400 | |
| Q13 | MOSFET, N-CH, 400V, IRF740, 10A, TO-220, RL | 490F-7400 | |

Integrated Circuits

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---|--------------------|------|
| U1 | IC, DUAL, OP, AMP, NE5532D, SOIC-8 | 3132-6021 | |
| U2 | IC, CLASS, D, DRIVER, SI8244, SOIC-16 | 3132-9890 | |
| U3 | IC, CLASS, D, DRIVER, SI8244, SOIC-16 | 3132-9890 | |
| U4 | IC, DUAL, OP, AMP, NE5532D, SOIC-8 | 3132-6021 | |
| U5 | IC, DUAL, OP, AMP, NE5532D, SOIC-8 | 3132-6021 | |
| U6 | IC, OPERATIONAL, AMPLIFIER, TLC082AID, SO8 | 3132-9900 | |
| U7 | IC, OPERATIONAL, AMPLIFIER, TLC082AID, SO8 | 3132-9900 | |
| U8 | IC, COMPARATOR, NJM360, SOIC-8S2 | 3132-9910 | |
| U9 | IC, COMPARATOR, NJM360, SOIC-8S2 | 3132-9910 | |
| U10 | IC, NJM78M05DL1A-#ZZZB, REGULATOR | 3132-2101 | |
| U11 | IC, NJM79M05DL1A-T-#ZZ, ZB, REGULATOR | 3132-3012 | |
| U12 | IC, LM19, THERMAL, SENSOR, TO-92, NS | 3132-2581 | |
| U13 | IC, LM339, SMD, COMPARATORS | 3132-1250 | |
| U14 | IC, 2IN, SHM, NAND, GT, 74VHC132M, SO14, ST | 3132-4001 | |

ELECTRICAL PART LIST

FreeSpace® IZA 2120-HZ and ZA 2120-HZ Amplifier PCB Assembly

Miscellaneous

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---|--------------------|------|
| AMP HIZ | SCREW, MACHINE, PAN, M3X8, CROSS-RECESS, BZ | 2900-3008 | |
| HS AMP HIZ | SCREW, MACHINE, PAN, M3X8, CROSS-RECESS, BZ | 2900-3008 | |
| HS AMP HIZ | HEATSINK, AMP, 62X23.1, L= | 5401-0282 | |
| J1 | WAFER, 4P, P2.0, STRAIGHT | 2102-040S | |
| J2 | WAFER, 4P, P3.96, STRAIGHT, MALE | 2101-3053 | |
| J3 | WAFER, 4P, P3.96, STRAIGHT, MALE | 2101-3053 | |
| J5 | CONN, FFC, 10P, P0.5, SMT, ST | 2101-3375 | |
| SILICON | INSULATN-SHEET, SLI-800, 96X21 | 3101-0701 | |
| T1 | TRANS, CURRENT, SENSE, 20A, EE8.3 | 1806-4237 | |
| T2 | TRANS, CURRENT, SENSE, 20A, EE8.3 | 1806-4237 | |
| T3 | TRANS, CURRENT, SENSE, 20A, EE8.3 | 1806-4237 | |
| T4 | TRANS, CURRENT, SENSE, 20A, EE8.3 | 1806-4237 | |

FreeSpace IZA 2120-HZ and ZA 2120-HZ LED & Output PCB Assembly

Capacitors

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|-----------------------------------|--------------------|------|
| C701 | CC, 630V, 1000P, 10%, 1206 | 150M-102KCF | |
| C702 | CC, 630V, 1000P, 10%, 1206 | 150M-102KCF | |
| C703 | CC, 630V, 1000P, 10%, 1206 | 150M-102KCF | |
| C704 | CC, 630V, 1000P, 10%, 1206 | 150M-102KCF | |
| C705 | CM, 400V, 0.1U, 5%, RB, 17.5X11X5 | 153T-104J7U | |
| C706 | CM, 400V, 0.1U, 5%, RB, 17.5X11X5 | 153T-104J7U | |

Diodes

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---|--------------------|------|
| D950 | LED, SP, 3X5, RD/GN, SUPER WHITE, DIFFUSED, EVERLIGHT | 3700-2861 | |
| D951 | LED, 3MM, BLUE, SP, SLR343BB, T 225419, ROHM | 3700-2824 | |
| D952 | LED, SP, 3X5, RD/GN, SUPER WHITE, DIFFUSED, EVERLIGHT | 3700-2861 | |

Miscellaneous

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---|--------------------|------|
| J720 | SOCKET, F, 2P, P5.08, 300V, 12A, GRN, ST | 2113-3420 | |
| J721 | SOCKET, F, 2P, P5.08, 300V, 12A, GRN, ST | 2113-3420 | |
| J710 | WIRE-CONN, 4P, P3.96, #18, UL1007, L=230, F/M | 7013-3991 | |
| J903 | SHEET, GROUND BRASS, T=0.8, TIN PLATED | 4136-0991 | |
| J950 | WAFER, 6 PIN, P2.0 | 2102-060R | |

ELECTRICAL PART LIST

FreeSpace® IZA 2120-HZ DSP PCB Assembly

Resistors

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|----------------------------------|--------------------|------|
| R400 | RMG, 1/16W, 3.3K, 1%, 0603 | 4723-332AR | |
| R401 | RMG, 1/16W, 3.3K, 1%, 0603 | 4723-332AR | |
| R402 | RMG, 1/16W, 3.3K, 1%, 0603 | 4723-332AR | |
| R403 | RMG, 1/16W, 3.3K, 1%, 0603 | 4723-332AR | |
| R404 | RMG, 1/16W, 30.9K, 1%, 0603/1608 | 4723-3092 | |
| R405 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R407 | RMG, 1/16W, 4.7K, 1%, 0603/1608 | 4723-472A | |
| R408 | RMG, 1/16W, 4.7K, 1%, 0603/1608 | 4723-472A | |
| R409 | RMG, 1/16W, 4.7K, 1%, 0603/1608 | 4723-472A | |
| R410 | RMG, 1/16W, 4.7K, 1%, 0603/1608 | 4723-472A | |
| R411 | RMG, 1/16W, 4.7K, 1%, 0603/1608 | 4723-472A | |
| R412 | RMG, 1/16W, 4.7K, 1%, 0603/1608 | 4723-472A | |
| R413 | RMG, 1/16W, 4.7K, 1%, 0603/1608 | 4723-472A | |
| R414 | RMG, 1/16W, 4.7K, 1%, 0603/1608 | 4723-472A | |
| R415 | RMG, 1/16W, 33R, 1%, 0603 | 4723-330A | |
| R416 | RMG, 1/16W, 33R, 1%, 0603 | 4723-330A | |
| R417 | RMG, 1/16W, 33R, 1%, 0603 | 4723-330A | |
| R418 | RMG, 1/16W, 33R, 1%, 0603 | 4723-330A | |
| R419 | RMG, 1/16W, 5.1K, 1%, 0603/1608 | 4723-512A | |
| R420 | RMG, 1/16W, 9.76K, 1%, 0603 | 4723-9761 | |
| R421 | RMG, 1/16W, 9.76K, 1%, 0603 | 4723-9761 | |
| R422 | RMG, 1/16W, 9.76K, 1%, 0603 | 4723-9761 | |
| R423 | RMG, 1/16W, 9.76K, 1%, 0603 | 4723-9761 | |
| R424 | RMG, 1/16W, 9.76K, 1%, 0603 | 4723-9761 | |
| R425 | RMG, 1/16W, 9.76K, 1%, 0603 | 4723-9761 | |
| R426 | RMG, 1/16W, 715R, 1%, 0603 | 4723-7150 | |
| R427 | RMG, 1/16W, 715R, 1%, 0603 | 4723-7150 | |
| R428 | RMG, 1/16W, 8.2K, 1%, 0603/1608 | 4723-822A | |
| R429 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R430 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R431 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R432 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R433 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R434 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R435 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R436 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R437 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R438 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R439 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R440 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R441 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R442 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R443 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R444 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R454 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R456 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R457 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R458 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R460 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R462 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R463 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R467 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |

ELECTRICAL PART LIST

FreeSpace® IZA 2120-HZ DSP PCB Assembly

Resistors (continued)

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---------------------------------|--------------------|------|
| R469 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R470 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R471 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R472 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R473 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R479 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R480 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R481 | RMG, 1/16W, 200K, 1%, 0603/1608 | 4723-221A | |
| R482 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R483 | RMG, 1/16W, 200K, 1%, 0603/1608 | 4723-221A | |
| R484 | RMG, 1/16W, 200K, 1%, 0603/1608 | 4723-221A | |
| R485 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R486 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R487 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R488 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R489 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R490 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R491 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R492 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R493 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R494 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R495 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R496 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R497 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R498 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R499 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R500 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R501 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R502 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R503 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R504 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R505 | RMG, 1/16W, 200K, 1%, 0603/1608 | 4723-221A | |
| R506 | RMG, 1/16W, 200K, 1%, 0603/1608 | 4723-221A | |
| R509 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R510 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R511 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R512 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R513 | RCFA, 1/16W, 47RX4, 5%, 0603 | 4703-470J04 | |
| R514 | RCFA, 1/16W, 47RX4, 5%, 0603 | 4703-470J04 | |
| R515 | RCFA, 1/16W, 47RX4, 5%, 0603 | 4703-470J04 | |
| R516 | RCFA, 1/16W, 47RX4, 5%, 0603 | 4703-470J04 | |
| R517 | RCFA, 1/16W, 47RX4, 5%, 0603 | 4703-470J04 | |
| R518 | RCFA, 1/16W, 47RX4, 5%, 0603 | 4703-470J04 | |
| R519 | RCFA, 1/16W, 47RX4, 5%, 0603 | 4703-470J04 | |
| R520 | RCFA, 1/16W, 47RX4, 5%, 0603 | 4703-470J04 | |
| R522 | RMG, 1/16W, 200K, 1%, 0603/1608 | 4723-221A | |
| R529 | RMG, 1/16W, 47R, 1%, 0603 | 4723-470A | |
| R530 | RMG, 1/16W, 200K, 1%, 0603/1608 | 4723-221A | |
| R531 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R533 | RMG, 1/16W, 200K, 1%, 0603/1608 | 4723-222A | |
| R534 | RMG, 1/16W, 200K, 1%, 0603/1608 | 4723-222A | |
| R535 | RMG, 1/16W, 200K, 1%, 0603/1608 | 4723-222A | |

ELECTRICAL PART LIST

FreeSpace® IZA 2120-HZ DSP PCB Assembly

Resistors (continued)

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---------------------------------|--------------------|------|
| R536 | RMG, 1/16W, 200K, 1%, 0603/1608 | 4723-222A | |
| R537 | RMG, 1/16W, 22K, 1%, 0603 | 4723-223AR | |
| R549 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R550 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R551 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R552 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R553 | RMG, 1/16W, 392R, 1%, 0603 | 4723-3920 | |
| R554 | RMG, 1/16W, 392R, 1%, 0603 | 4723-3920 | |
| R555 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A | |
| R556 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A | |
| R557 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A | |
| R558 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A | |
| R559 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A | |
| R561 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A | |
| R565 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A | |
| R568 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A | |
| R569 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A | |
| R572 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A | |
| R573 | RMG, 1/10W, 13.7K, 1%, 0603 | 4720-1372 | |
| R574 | RMG, 1/16W, 3.3K, 1%, 0603 | 4723-332AR | |
| R575 | RMG, 1/16W, 3.3K, 1%, 0603 | 4723-332AR | |
| R576 | RMG, 1/10W, 13.7K, 1%, 0603 | 4720-1372 | |
| R577 | RMG, 1/16W, 3.3K, 1%, 0603 | 4723-332AR | |
| R578 | RMG, 1/10W, 13.7K, 1%, 0603 | 4720-1372 | |
| R579 | RMG, 1/16W, 3.3K, 1%, 0603 | 4723-332AR | |
| R580 | RMG, 1/10W, 13.7K, 1%, 0603 | 4720-1372 | |
| R581 | RMG, 1/16W, 13K, 1%, 0603 | 4723-133AR | |
| R582 | RMG, 1/10W, 20K, 1%, 0603 | 4720-203A | |
| R583 | RMG, 1/16W, 13K, 1%, 0603 | 4723-133AR | |
| R584 | RMG, 1/10W, 20K, 1%, 0603 | 4720-203A | |
| R585 | RMG, 1/10W, 20K, 1%, 0603 | 4720-203A | |
| R586 | RMG, 1/10W, 20K, 1%, 0603 | 4720-203A | |
| R587 | RMG, 1/16W, 13K, 1%, 0603 | 4723-133AR | |
| R588 | RMG, 1/16W, 13K, 1%, 0603 | 4723-133AR | |
| R589 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R590 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R591 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R592 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R597 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R598 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R599 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R600 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R601 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R602 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R603 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R604 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R605 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R606 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R607 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R608 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R609 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R610 | RMG, 1/16W, 100R, 1%, 0603 | 4723-101A | |

ELECTRICAL PART LIST

FreeSpace® IZA 2120-HZ DSP PCB Assembly

Resistors (continued)

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---------------------------------|--------------------|------|
| R611 | RMG, 1/16W, 100R, 1%, 0603 | 4723-101A | |
| R612 | RMG, 1/16W, 100R, 1%, 0603 | 4723-101A | |
| R613 | RMG, 1/16W, 100R, 1%, 0603 | 4723-101A | |
| R614 | RMG, 1/16W, 100K, 1%, 0603 | 4723-104AR | |
| R615 | RMG, 1/16W, 100K, 1%, 0603 | 4723-104AR | |
| R616 | RMG, 1/16W, 1M, 1%, 0603 | 4723-105A | |
| R617 | RMG, 1/16W, 1R, 5%, 0603 | 4723-1R0J | |
| R618 | RMG, 1/16W, 1R, 5%, 0603 | 4723-1R0J | |
| R621 | RMG, 1/16W, 200K, 1%, 0603/1608 | 4723-221A | |
| R622 | RMG, 1/16W, 13K, 1%, 0603 | 4723-133AR | |
| R623 | RMG, 1/16W, 13K, 1%, 0603 | 4723-133AR | |
| R635 | RMG, 1/16W, 22K, 1%, 0603 | 4723-223AR | |
| R646 | RMG, 1/16W, 1.5K, 1%, 0603 | 4723-152AR | |
| R648 | RMG, 1W, 5.1R, 5%, 2512 | 4728-5R1J | |
| R649 | RMG, 1W, 5.1R, 5%, 2512 | 4728-5R1J | |
| R650 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R651 | RMG, 1/16W, 47K, 1%, 0603 | 4723-473AR | |
| R652 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R653 | RMG, 1/16W, 3.9K, 5%, 0603 | 4723-392JR | |
| R654 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R655 | RMG, 1/16W, 200K, 1%, 0603/1608 | 4723-204A | |
| R656 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R657 | RMG, 1/16W, 100K, 1%, 0603 | 4723-104AR | |
| R658 | RMG, 1/10W, 20K, 1%, 0603 | 4720-203A | |
| R659 | RMG, 1/16W, 47R, 1%, 0603 | 4723-470A | |

Capacitors

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---|--------------------|------|
| C400 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C401 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C402 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C403 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C404 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C405 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C406 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C407 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C408 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102JAC | |
| C409 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102JAC | |
| C410 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102JAC | |
| C411 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102JAC | |
| C412 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102JAC | |
| C413 | CC, 25V, 10U, 10%, 1206, 3.2X1.6, X5R | 150E-106KCF | |
| C414 | CC, 50V, 0.01U, 5%, 0603 | 150F-103JAC | |
| C415 | CC, 50V, 0.01U, 5%, 0603 | 150F-103JAC | |
| C416 | CT, 16V, 10U, 20%, SMD, 1.6X3.2 | 154D-106MCF | |
| C417 | CT, 16V, 47U, 10%, SMD, 85C, 6.0X3.2 | 154D-476KKF | |
| C418 | CE, 10V, 22U, 20%, SM, 3X5.3, 85C-2000H | 157C-226MEJ | |
| C419 | CC, 6.3V, 22U, 10%, 1206, 3.2X1.6 | 150B-226KCF | |
| C420 | CC, 6.3V, 22U, 10%, 1206, 3.2X1.6 | 150B-226KCF | |
| C426 | CC, 16V, 1U, 10%, 0603, 0.8X1.6 | 150D-105KAC | |
| C427 | CC, 50V, 33PF, 5%, 0603, C0G | 150F-330JAC | |

ELECTRICAL PART LIST

FreeSpace® IZA 2120-HZ DSP PCB Assembly

Capacitors (continued)

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---|--------------------|------|
| C428 | CC, 50V, 33PF, 5%, 0603, C0G | 150F-330JAC | |
| C430 | CC, 6.3V, 4.7U, 10%, 0603 | 150B-475KAC | |
| C431 | CC, 6.3V, 4.7U, 10%, 0603 | 150B-475KAC | |
| C432 | CC, 6.3V, 4.7U, 10%, 0603 | 150B-475KAC | |
| C433 | CC, 6.3V, 4.7U, 10%, 0603 | 150B-475KAC | |
| C434 | CC, 6.3V, 4.7U, 10%, 0603 | 150B-475KAC | |
| C435 | CC, 50V, 2700PF, 10%, 0603 | 150F-272KAC | |
| C436 | CC, 50V, 270P, 10%, 0603, 1x2 | 150F-271KAC | |
| C437 | CC, 50V, 270P, 10%, 0603, 1x2 | 150F-271KAC | |
| C438 | CC, 50V, 270P, 10%, 0603, 1x2 | 150F-271KAC | |
| C439 | CC, 50V, 270P, 10%, 0603, 1x2 | 150F-271KAC | |
| C440 | CC, 50V, 220PF, 5%, 0603, C0G | 150F-221JAC | |
| C441 | CC, 50V, 220PF, 5%, 0603, C0G | 150F-221JAC | |
| C442 | CC, 50V, 220PF, 5%, 0603, C0G | 150F-221JAC | |
| C443 | CC, 50V, 220PF, 5%, 0603, C0G | 150F-221JAC | |
| C444 | CT, 6.3V, 100uF, 20%, SMD, 3.5X2.8MM | 154B-107MFE | |
| C445 | CE, 35V, 47U, 20%, SM, 6.6X5.7, LOW, ESR, LELON | 157Q-476MMKR5 | |
| C446 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102JAC | |
| C447 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102JAC | |
| C448 | CE, 35V, 47U, 20%, SM, 6.6X5.7, LOW, ESR, LELON | 157Q-476MMKR5 | |
| C449 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106MEJ | |
| C450 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106MEJ | |
| C451 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106MEJ | |
| C452 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106MEJ | |
| C453 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106MEJ | |
| C454 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106MEJ | |
| C455 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106MEJ | |
| C456 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106MEJ | |
| C457 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106MEJ | |
| C458 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106MEJ | |
| C461 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106MEJ | |
| C462 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106MEJ | |
| C463 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106MEJ | |
| C464 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106MEJ | |
| C465 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106MEJ | |
| C466 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106MEJ | |
| C467 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106MEJ | |
| C468 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106MEJ | |
| C469 | CC, 50V, 22P, 5%, 0603, C0G | 150F-220JAC | |
| C470 | CC, 50V, 22P, 5%, 0603, C0G | 150F-220JAC | |
| C471 | CC, 50V, 22P, 5%, 0603, C0G | 150F-220JAC | |
| C472 | CC, 50V, 22P, 5%, 0603, C0G | 150F-220JAC | |
| C473 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101JAC | |
| C474 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101JAC | |
| C475 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101JAC | |
| C476 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101JAC | |
| C477 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101JAC | |
| C479 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101JAC | |
| C481 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101JAC | |
| C482 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101JAC | |

ELECTRICAL PART LIST

FreeSpace® IZA 2120-HZ DSP PCB Assembly

Capacitors (continued)

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---|--------------------|------|
| C483 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101JAC | |
| C484 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101JAC | |
| C485 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101JAC | |
| C486 | CE, 25V, 220U, 20%, SM, 8.4X10, LOW, ESR, LELON | 157E-227MPSR5 | |
| C487 | CE, 25V, 100UF, 20%, 6.3X7.7, SMD | 157E-107MLO | |
| C488 | CE, 25V, 100UF, 20%, 6.3X7.7, SMD | 157E-107MLO | |
| C489 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C490 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C491 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C492 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C493 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C494 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C495 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C496 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C497 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C498 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C499 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C500 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C503 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C504 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C505 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C511 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C512 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102JAC | |
| C513 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C514 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102JAC | |
| C515 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C516 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C517 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C518 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C519 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C520 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C521 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C522 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C523 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C524 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C525 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C526 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C527 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C528 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C529 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C530 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C531 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C534 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C535 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C536 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C537 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C538 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C539 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C540 | CC, 50V, 560P, 10%, 0603/1608, 1X2 | 150F-561KAC | |
| C541 | CC, 50V, 560P, 10%, 0603/1608, 1X2 | 150F-561KAC | |
| C542 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |

ELECTRICAL PART LIST

FreeSpace® IZA 2120-HZ DSP PCB Assembly

Capacitors (continued)

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|--|--------------------|------|
| C543 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C544 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C545 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C546 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C547 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C548 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C549 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C550 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C551 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C552 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C553 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C554 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C555 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C556 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C557 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C558 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C559 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C560 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C561 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C562 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C563 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C564 | CE, 25V, 10U, 20%, 5.3X5.4, SMD, UWX1E100MCR1GB, NCC | 157E-106MJJC | |
| C565 | CE, 35V, 47U, 20%, SM, 6.6X5.7, LOW, ESR, LELON | 157Q-476MMKR5 | |

Inductors

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|--|--------------------|------|
| L400 | INDUCTOR, 22UH, 20%, 8.1X8, B1000AS-220M=P3, SMD, TOKO | 1803-0103 | |
| L401 | FERRITE, BEAD, CHIP, SEBW201209U121MT, 0805 | 1808-0872 | |
| L404 | FERRITE, BEAD, CHIP, SEBW201209U121MT, 0805 | 1808-0872 | |
| L405 | FERRITE, BEAD, CHIP, SEBW201209U121MT, 0805 | 1808-0872 | |
| L407 | FERRITE, BEAD, CHIP, SEBW201209U121MT, 0805 | 1808-0872 | |
| L408 | FERRITE, BEAD, CHIP, SEBW201209U121MT, 0805 | 1808-0872 | |
| L409 | FERRITE, CHIP, 0603, BLM18AG102SN1D, MURATA | 1808-0878 | |
| L410 | FERRITE, CHIP, 0603, BLM18AG102SN1D, MURATA | 1808-0878 | |
| L411 | FERRITE, CHIP, 0603, BLM18AG102SN1D, MURATA | 1808-0878 | |
| L412 | FERRITE, CHIP, 0603, BLM18AG102SN1D, MURATA | 1808-0878 | |
| L415 | FERRITE, CHIP, 0603, BLM18AG102SN1D, MURATA | 1808-0878 | |
| L416 | FERRITE, CHIP, 0603, BLM18AG102SN1D, MURATA | 1808-0878 | |

ELECTRICAL PART LIST

FreeSpace® IZA 2120-HZ DSP PCB Assembly

Diodes

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|--|--------------------|------|
| D400 | DIODE, SCHOTTKY, SK16, DO-214AA, 60V, 1A, SMD, PANJIT | 480S-K160 | |
| D401 | DIODE, SCHOTTKY, 40V, 3A, ST, PS3L40S, DO-214AB, SMD, ST | 480L-40S0 | |
| D402 | DIODE, BAV99, SOT23 | 4840-8970 | |
| D403 | DIODE, BAV99, SOT23 | 4840-8970 | |
| D404 | DIODE, BAV99, SOT23 | 4840-8970 | |
| D405 | DIODE, BAV99, SOT23 | 4840-8970 | |
| D407 | LED, SMD, 2.0X1.25X0.8, RD, SUPER, EVLITE | 3700-7839 | |
| D408 | LED, SMD, 2.0X1.25X0.8, GN, SUPER, EVLITE | 3700-7839 | |
| D409 | DIODE, FAST, 75V, 0.5A, BAS316, SOD323, SM | 480S-3160 | |
| D410 | DIODE, FAST, 75V, 0.5A, BAS316, SOD323, SM | 480S-3160 | |
| D411 | DIODE, FAST, 75V, 0.5A, BAS316, SOD323, SM | 480S-3160 | |
| D412 | DIODE, FAST, 75V, 0.5A, BAS316, SOD323, SM | 480S-3160 | |
| D413 | DIODE, FAST, 75V, 0.5A, BAS316, SOD323, SM | 480S-3160 | |
| D414 | DIODE, FAST, 75V, 0.5A, BAS316, SOD323, SM | 480S-3160 | |
| D415 | LED, SMD, 2.0X1.25X0.8, RD, SUPER, EVLITE | 3700-7839 | |

Transistors

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|--|--------------------|------|
| Q405 | TR, NPN, 2SC3326, HFE:, 350-1200, 2-3F1A, SM | 4860-1890 | |
| Q406 | TR, NPN, 2SC3326, HFE:, 350-1200, 2-3F1A, SM | 4860-1890 | |
| Q408 | TR, KTA1504Y | 4851-504Y | |
| Q409 | TR, MMBT4403LT1G, SMD | 4854-4030 | |
| Q410 | TR, MMBT3906LT1G, SMD | 4860-1980 | |

Integrated Circuits

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|--|--------------------|------|
| U400 | IC, MCU, LPC1114U35FBD48, LQF, P48 | 3132-9481 | |
| U401 | IC, FLASH, MX25L4006EM1, 8-SOP | 3132-8711 | |
| U402 | IC, DSP, AUDIO, TAS3204, PQFP-64 | 3132-8131 | |
| U403 | IC, REG, NCP1117ST33T3G, 3.3V, SOT-223, ONSEMI | 3132-148111 | |
| U404 | IC, 16-CH, DEMULTIPLEXER, 74HC4067M96, SO24, TEXAS | 3132-3021 | |
| U405 | IC, 16-CH, DEMULTIPLEXER, 74HC4067M96, SO24, TEXAS | 3132-3021 | |
| U406 | IC, OP, AMP, SMD, 105C, BA4560RF, SOP8 | 3132-7011 | |
| U407 | IC, SETP-DOWN, CONVERTER, MP1591DN, SOIC8N, MPS | 3132-4711 | |
| U408 | IC, ASIC, SN74LVC2G17, DCK | 3132-7450 | |
| U409 | IC, TL072CDR, DUAL, J-FET, INPUT, OP-AMP, (SMD) | 3130-8020 | |
| U410 | IC, TL072CDR, DUAL, J-FET, INPUT, OP-AMP, (SMD) | 3130-8020 | |
| U411 | IC, TL072CDR, DUAL, J-FET, INPUT, OP-AMP, (SMD) | 3130-8020 | |
| U413 | IC, TL072CDR, DUAL, J-FET, INPUT, OP-AMP, (SMD) | 3130-8020 | |

ELECTRICAL PART LIST

FreeSpace® IZA 2120-HZ DSP PCB Assembly

Integrated Circuits (continued)

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---|--------------------|------|
| U414 | IC, TL072CDR, DUAL, J-FET, INPUT, OP-AMP, (SMD) | 3130-8020 | |
| U415 | IC, REGULATOR, 7815, DPAK/TO-252, AUK | 3132-816149 | |
| U416 | IC, REGULATOR, -15V, 7915, DPAK/TO-252, AUK | 3132-817149 | |

Miscellaneous

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---|--------------------|------|
| J400 | FFC, CONN., 30PIN, P1.0, TOP, ENTRY | 2101-3073 | |
| J401 | FFC, CONN., 30PIN, P1.0, TOP, ENTRY | 2101-3073 | |
| J402 | CONN, PIN, HEADER, 5P, P2.54, DIP, ST, M, 1X5P, H11.6 | 2101-3422 | |
| J403 | WAFER, 4P, P2.0, STRAIGHT | 2102-040S팍 | |
| J404 | 7, PIN, WAFER, P2.0, (COULUMB) | 2102-070S팍 | |
| J405 | CONN, FFC, 10P, P0.5, SMT, ST, F | 2101-3375 | |
| J406 | CONNECTOR, FFC, 25P, P1.0, TOP, ENTRY | 2101-3043 | |
| X400 | CRYSTAL, 24.576MHZ20PPM, SM, HC-49-SMD | 2300-3290 | |
| X401 | CRYSTAL, 12MHZ, -40, C, SMD | 2300-2430 | |

FreeSpace IZA 2120-HZ Front PCB Assembly

Resistors

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---------------------------------|--------------------|------|
| R900 | RMG, 1/16W, 100R, 1%, 0603 | 4723-101A | |
| R901 | RMG, 1/16W, 5.1K, 1%, 0603/1608 | 4723-512A | |
| R902 | RMG, 1/16W, 5.1K, 1%, 0603/1608 | 4723-512A | |
| R903 | RMG, 1/16W, 5.1K, 1%, 0603/1608 | 4723-512A | |
| R904 | RMG, 1/16W, 715R, 1%, 0603 | 4723-7150 | |
| R905 | RMG, 1/16W, 715R, 1%, 0603 | 4723-7150 | |
| R906 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R907 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R908 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R909 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R910 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R911 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R912 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R913 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R914 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R915 | RMG, 1/16W, 100R, 1%, 0603 | 4723-101A | |
| R916 | RMG, 1/16W, 100R, 1%, 0603 | 4723-101A | |
| R917 | RMG, 1/16W, 100R, 1%, 0603 | 4723-101A | |
| R918 | RMG, 1/16W, 100R, 1%, 0603 | 4723-101A | |
| R919 | RMG, 1/16W, 100R, 1%, 0603 | 4723-101A | |
| R920 | RMG, 1/16W, 100R, 1%, 0603 | 4723-101A | |
| R921 | RMG, 1/16W, 100R, 1%, 0603 | 4723-101A | |
| R922 | RMG, 1/10W, 100R, 1%, 0805 | 4720-101A | |
| R923 | RMG, 1/10W, 100R, 1%, 0805 | 4720-101A | |
| R924 | RMG, 1/16W, 1M, 1%, 0603 | 4723-105A | |
| R925 | RMG, 1/16W, 1M, 1%, 0603 | 4723-105A | |
| R926 | RMG, 1/10W, 24.3K, 1%, 0603 | 4720-2432 | |

ELECTRICAL PART LIST

FreeSpace IZA 2120-HZ Front PCB Assembly

Resistors (continued)

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|-----------------------------|--------------------|------|
| R927 | RMG, 1/10W, 24.3K, 1%, 0603 | 4720-2432 | |
| R928 | RMG, 1/16W, 1R, 5%, 0603 | 4723-1R0J | |
| R929 | RMG, 1/16W, 1R, 5%, 0603 | 4723-1R0J | |
| R930 | RMG, 1/16W, 13K, 1%, 0603 | 4723-133AR | |
| R931 | RMG, 1/16W, 13K, 1%, 0603 | 4723-133AR | |
| R938 | RMG, 1/16W, 100R, 1%, 0603 | 4723-101A | |
| R939 | RMG, 1/16W, 100R, 1%, 0603 | 4723-101A | |

Capacitors

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---|--------------------|------|
| C900 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102JAC | |
| C901 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102JAC | |
| C902 | CC, 50V, 0.01uF, 10%, 0603, X7R | 150F-104KAC | |
| C903 | CC, 50V, 0.01uF, 10%, 0603, X7R | 150F-104KAC | |
| C904 | CC, 50V, 0.01uF, 10%, 0603, X7R | 150F-104KAC | |
| C905 | CC, 50V, 0.01uF, 10%, 0603, X7R | 150F-104KAC | |
| C906 | CC, 50V, 0.01uF, 10%, 0603, X7R | 150F-104KAC | |
| C907 | CC, 50V, 0.01uF, 10%, 0603, X7R | 150F-104KAC | |
| C908 | CC, 50V, 0.01uF, 10%, 0603, X7R | 150F-104KAC | |
| C909 | CC, 50V, 0.01uF, 10%, 0603, X7R | 150F-104KAC | |
| C910 | CC, 50V, 0.01uF, 10%, 0603, X7R | 150F-104KAC | |
| C911 | CC, 50V, 0.01uF, 10%, 0603, X7R | 150F-104KAC | |
| C912 | CC, 50V, 0.01uF, 10%, 0603, X7R | 150F-104KAC | |
| C913 | CC, 50V, 0.01uF, 10%, 0603, X7R | 150F-104KAC | |
| C914 | CC, 50V, 0.01uF, 10%, 0603, X7R | 150F-103KAC | |
| C915 | CC, 50V, 0.01uF, 10%, 0603, X7R | 150F-103KAC | |
| C916 | CC, 50V, 0.01uF, 10%, 0603, X7R | 150F-103KAC | |
| C917 | CC, 50V, 0.01uF, 10%, 0603, X7R | 150F-103KAC | |
| C918 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106MEJ | |
| C919 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106MEJ | |
| C920 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106MEJ | |
| C921 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106MEJ | |
| C922 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106MEJ | |
| C923 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106MEJ | |
| C924 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101JAC | |
| C925 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101JAC | |
| C926 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101JAC | |
| C927 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101JAC | |
| C928 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101JAC | |
| C929 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101JAC | |
| C930 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101JAC | |
| C931 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101JAC | |
| C932 | CC, 50V, 0.01uF, 10%, 0603, X7R | 150F-104KAC | |
| C933 | CC, 50V, 0.01uF, 10%, 0603, X7R | 150F-103KAC | |
| C934 | CC, 50V, 0.01uF, 10%, 0603, X7R | 150F-103KAC | |

ELECTRICAL PART LIST

FreeSpace IZA 2120-HZ Front PCB Assembly

Diodes

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|--|--------------------|------|
| D900 | DIODE, BAV99, SOT23 | 4840-8970 | |
| D901 | DIODE, BAV99, SOT23 | 4840-8970 | |
| D902 | DIODE, BAV99, SOT23 | 4840-8970 | |
| D903 | DOUBLE, DIODE, BAT54S, SOT-23, SCHOTTKY, SMD | 480T-54S0 | |
| D904 | DOUBLE, DIODE, BAT54S, SOT-23, SCHOTTKY, SMD | 480T-54S0 | |

Integrated Circuits

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---|--------------------|------|
| U710 | IC, ESD, PROTECTION, TPD2E001, SOT533 | 3132-7831 | |
| U900 | IC, OP, AMP, SMD, 105C, BA4560RF, SOP8 | 3132-7011 | |
| U901 | IC, TL072CDR, DUAL, J-FET, INPUT, OP-AMP, (SMD) | 3130-8020 | |
| U902 | IC, TL072CDR, DUAL, J-FET, INPUT, OP-AMP, (SMD) | 3130-8020 | |
| U903 | IC, TL072CDR, DUAL, J-FET, INPUT, OP-AMP, (SMD) | 3130-8020 | |

Miscellaneous

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---|--------------------|------|
| J711A | CONNECTOR, PIN, HEADER, 4P | 2101-3295 | |
| J714 | USB-B, CONN, F, 4PIN, P2.5 | 2113-3428 | |
| J900 | WIRE-CONN, 6P, P2.0, #28, UL1007, L=220, RD/WH, F/M | 7013-4531 | |
| J901 | INLET, EARPHONE, 50V, 1A, 3.5MM | 2113-3332 | |
| J902 | CONNECTOR, FFC, 25P, P1.0, TOP, ENTRY | 2101-3043 | |
| J951 | BRACKET, GROUND, BRASS, T=0.8, TIN, PLATED | 4132-6223 | |
| SW702 | SW, DIP, SPST, 24V, 25MA, P2.54, 6P | 5200-5077 | |
| SW704 | SW, DIP, SPST, 24V, 25MA, P2.54, 6P | 5200-5077 | |
| SW900 | SWITCH, SLIDE, DPDT, 50V0.5A, L=14, METAL, ROCKER | 5200-5013 | |
| VR900 | VR, ROTARY, B20KX1, 20%, C.C, V, L=30, 40TEETH, CTR | 4751-227E | |
| VR901 | VR, ROTARY, B20KX1, 20%, C.C, V, L=30, 40TEETH, CTR | 4751-227E | |
| VR902 | VR, ROTARY, B20KX1, 20%, V, L=15 | 4751-2280 | |
| VR903 | VR, ROTARY, B20KX1, 20%, C.C, V, L=30, 40TEETH, CTR | 4751-227E | |
| VR904 | VR, ROTARY, B20KX1, 20%, C.C, V, L=30, 40TEETH, CTR | 4751-227E | |

ELECTRICAL PART LIST

FreeSpace IZA 2120-HZ Rear Panel PCB Assembly

Resistors

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---------------------------------|--------------------|------|
| R700 | RMG, 1/16W, 27K, 1%, 0603/1608 | 4723-273A+P | |
| R701 | RMG, 1/16W, 27K, 1%, 0603/1608 | 4723-273A+P | |
| R702 | RMG, 1/16W, 3K, 1%, 0603 | 4723-302A+P | |
| R703 | RMG, 1/16W, 3K, 1%, 0603 | 4723-302A+P | |
| R704 | RMG, 1/16W, 47K, 1%, 0603 | 4723-473A+P-R | |
| R706 | RMG, 1/16W, 5.1K, 1%, 0603/1608 | 4723-512A+P | |
| R707 | RMG, 1/16W, 5.1K, 1%, 0603/1608 | 4723-512A+P | |
| R708 | RMG, 1/16W, 5.1K, 1%, 0603/1608 | 4723-512A+P | |
| R709 | RMG, 1/16W, 5.1K, 1%, 0603/1608 | 4723-512A+P | |
| R710 | RMG, 1/8W, 0R, 1%, 1206 | 4721-000A+6 | |
| R711 | RMG, 1/8W, 0R, 1%, 1206 | 4721-000A+6 | |
| R714 | RMG, 1/16W, 4.99K, 1%, 0603 | 4723-4991+P | |
| R715 | RMG, 1/16W, 4.99K, 1%, 0603 | 4723-4991+P | |
| R716 | RMG, 1/16W, 4.99K, 1%, 0603 | 4723-4991+P | |
| R717 | RMG, 1/16W, 4.99K, 1%, 0603 | 4723-4991+P | |
| R719 | RMG, 1/16W, 9.76K, 1%, 0603 | 4723-9761+P | |
| R720 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A+P | |
| R721 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A+P | |
| R727 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A+P | |
| R729 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A+P | |
| R731 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A+P | |
| R732 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A+P | |
| R739 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A+P | |
| R742 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A+P | |
| R743 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A+P | |
| R744 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A+P | |
| R745 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A+P | |
| R746 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A+P | |
| R747 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A+P | |
| R749 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R752 | RMG, 1/16W, 10R, 1%, 0603 | 4723-100A+P-R | |
| R753 | RMG, 1/16W, 10R, 1%, 0603 | 4723-100A+P-R | |
| R754 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R755 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R756 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R757 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R758 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R759 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R760 | RMG, 1/16W, 1.5K, 1%, 0603 | 4723-152A+P-R | |
| R761 | RMG, 1/16W, 2.7K, 1%, 0603/1608 | 4723-272A+P | |
| R762 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A+P | |
| R763 | RMG, 1/16W, 5.1K, 1%, 0603/1608 | 4723-512A+P | |
| R764 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R765 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R766 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R778 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R779 | RMG, 1/16W, 100K, 1%, 0603 | 4723-104A+P-R | |
| R780 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R781 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R782 | RMG, 1/16W, 100K, 1%, 0603 | 4723-104A+P-R | |
| R783 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R784 | RMG, 1/16W, 100K, 1%, 0603 | 4723-104A+P-R | |

ELECTRICAL PART LIST

FreeSpace IZA 2120-HZ Rear Panel PCB Assembly

Resistors (continued)

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---------------------------------|--------------------|------|
| R785 | RMG, 1/16W, 100K, 1%, 0603 | 4723-104A+P-R | |
| R786 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R787 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R794 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R795 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R796 | RMG, 1/16W, 100K, 1%, 0603 | 4723-104A+P-R | |
| R797 | RMG, 1/16W, 100K, 1%, 0603 | 4723-104A+P-R | |
| R798 | RMG, 1/16W, 100K, 1%, 0603 | 4723-104A+P-R | |
| R799 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R800 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R801 | RMG, 1/16W, 100K, 1%, 0603 | 4723-104A+P-R | |
| R802 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R803 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R804 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R805 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R806 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R807 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R808 | RMG, 1/16W, 100R, 1%, 0603 | 4723-101A+P | |
| R809 | RMG, 1/16W, 100R, 1%, 0603 | 4723-101A+P | |
| R814 | RMG, 1/10W, 100R, 1%, 0805 | 4720-101A+J | |
| R815 | RMG, 1/10W, 100R, 1%, 0805 | 4720-101A+J | |
| R816 | RMG, 1/10W, 100R, 1%, 0805 | 4720-101A+J | |
| R817 | RMG, 1/10W, 100R, 1%, 0805 | 4720-101A+J | |
| R820 | RMG, 1/10W, 100R, 1%, 0805 | 4720-101A+J | |
| R821 | RMG, 1/10W, 100R, 1%, 0805 | 4720-101A+J | |
| R822 | RMG, 1/10W, 100R, 1%, 0805 | 4720-101A+J | |
| R823 | RMG, 1/10W, 100R, 1%, 0805 | 4720-101A+J | |
| R824 | RMG, 1/10W, 100R, 1%, 0805 | 4720-101A+J | |
| R825 | RMG, 1/10W, 100R, 1%, 0805 | 4720-101A+J | |
| R842 | RMG, 1/16W, 15R, 5%, 0603 | 4723-150J+P-R | |
| R847 | RMG, 1/16W, 150R, 1%, 0603 | 4723-151A+P-R | |
| R848 | RMG, 1/16W, 150R, 1%, 0603 | 4723-151A+P-R | |
| R849 | RMG, 1/16W, 150R, 1%, 0603 | 4723-151A+P-R | |
| R850 | RMG, 1/16W, 150R, 1%, 0603 | 4723-151A+P-R | |
| R852 | RMG, 1/16W, 2.2K, 1%, 0603/1608 | 4723-222A+P | |
| R854 | RMG, 1/16W, 2.2K, 1%, 0603/1608 | 4723-222A+P | |
| R857 | RMG, 1/16W, 2K, 1%, 0603/1608 | 4723-202A+P | |
| R858 | RMG, 1/16W, 2K, 1%, 0603/1608 | 4723-202A+P | |
| R864 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A+P | |
| R868 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R869 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R870 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R871 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R872 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R873 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R876 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R877 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R878 | RMG, 1/16W, 5.1K, 1%, 0603/1608 | 4723-512A+P | |
| R879 | RMG, 1/16W, 5.1K, 1%, 0603/1608 | 4723-512A+P | |
| R880 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A+P | |
| R881 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A+P | |
| R882 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |

ELECTRICAL PART LIST

FreeSpace IZA 2120-HZ Rear Panel PCB Assembly

Resistors (continued)

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---------------------------------|--------------------|------|
| R883 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R884 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R885 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R891 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A+P | |
| R892 | RMG, 1/16W, 1.5K, 1%, 0603 | 4723-152A+P-R | |
| R893 | RMG, 1/16W, 2.7K, 1%, 0603/1608 | 4723-272A+P | |
| R894 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A+P | |
| R895 | RMG, 1/16W, 5.1K, 1%, 0603/1608 | 4723-512A+P | |
| R896 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |

Capacitors

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|--|--------------------|------|
| C700 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C701 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C702 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C710 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C711 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C712 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C713 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C714 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C717 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C718 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C721 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C722 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C723 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C724 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C725 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C726 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C727 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C728 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C729 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102J+P-AC | |
| C730 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102J+P-AC | |
| C735 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102J+P-AC | |
| C739 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102J+P-AC | |
| C741 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101J+P-AC | |
| C743 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101J+P-AC | |
| C746 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102J+P-AC | |
| C747 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102J+P-AC | |
| C749 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102J+P-AC | |
| C750 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102J+P-AC | |
| C755 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101J+P-AC | |
| C757 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101J+P-AC | |
| C760 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102J+P-AC | |
| C761 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102J+P-AC | |
| C762 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102J+P-AC | |
| C765 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102J+P-AC | |
| C767 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102J+P-AC | |
| C768 | CC, 50V, 1000p, 5%, 0805, 1.25X2.0, MURATA | 150F-102J+J-BDM | |
| C769 | CC, 50V, 1000p, 5%, 0805, 1.25X2.0, MURATA | 150F-102J+J-BDM | |
| C771 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102J+P-AC | |
| C772 | CC, 50V, 22P, 5%, 0603, C0G | 150F-220J+P-AC | |

ELECTRICAL PART LIST

FreeSpace IZA 2120-HZ Rear Panel PCB Assembly

Capacitors (continued)

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|--|--------------------|------|
| C773 | CC, 50V, 22P, 5%, 0603, COG | 150F-220J+P-AC | |
| C774 | CC, 50V, 0.01uF, 10%, 0603, X7R | 150F-103K+P-AC | |
| C775 | CC, 50V, 1000p, 5%, 0805, 1.25X2.0, MURATA | 150F-103K+P-AC | |
| C776 | CC, 50V, 1000p, 5%, 0805, 1.25X2.0, MURATA | 150F-103K+P-AC | |
| C777 | CC, 50V, 1000p, 5%, 0805, 1.25X2.0, MURATA | 150F-103K+P-AC | |
| C778 | CC, 50V, 1000p, 5%, 0805, 1.25X2.0, MURATA | 150F-103K+P-AC | |
| C779 | CC, 50V, 1000p, 5%, 0805, 1.25X2.0, MURATA | 150F-103K+P-AC | |
| C780 | CC, 50V, 1000p, 5%, 0805, 1.25X2.0, MURATA | 150F-103K+P-AC | |
| C785 | CC, 50V, 1000p, 5%, 0805, 1.25X2.0, MURATA | 150F-103K+P-AC | |
| C786 | CC, 50V, 1000p, 5%, 0805, 1.25X2.0, MURATA | 150F-103K+P-AC | |
| C788 | CC, 100V, 0.1U, 10%, 1206, AVX | 150H-104K+6-CFD | |
| C789 | CC, 100V, 0.1U, 10%, 1206, AVX | 150H-104K+6-CFD | |
| C790 | CC, 100V, 0.1U, 10%, 1206, AVX | 150H-104K+6-CFD | |
| C795 | CE, 6.3V, 220U, 20%, SM, 6.3X5.3, NOVER | 157B-227M+3-LJU | |
| C796 | CE, 6.3V, 220U, 20%, SM, 6.3X5.3, NOVER | 157B-227M+3-LJU | |
| C797 | CE, 6.3V, 220U, 20%, SM, 6.3X5.3, NOVER | 157B-227M+3-LJU | |
| C798 | CE, 6.3V, 220U, 20%, SM, 6.3X5.3, NOVER | 157B-227M+3-LJU | |
| C800 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106M+3-EJ | |
| C802 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106M+3-EJ | |
| C804 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106M+3-EJ | |
| C805 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106M+3-EJ | |
| C810 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106M+3-EJ | |
| C814 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106M+3-EJ | |
| C815 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106M+3-EJ | |
| C816 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106M+3-EJ | |
| C817 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106M+3-EJ | |
| C818 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106M+3-EJ | |
| C821 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106M+3-EJ | |
| C822 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106M+3-EJ | |
| C823 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106M+3-EJ | |
| C824 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106M+3-EJ | |
| C825 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106M+3-EJ | |
| C826 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106M+3-EJ | |
| C827 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106M+3-EJ | |
| C828 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106M+3-EJ | |
| C833 | CC, 50V, 100PF, 5%, 0603, COG | 150F-101J+P-AC | |
| C834 | CC, 50V, 100PF, 5%, 0603, COG | 150F-101J+P-AC | |
| C835 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102J+P-AC | |
| C836 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102J+P-AC | |
| C837 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C840 | CC, 50V, 470PF, 5%, 0603, COG | 150F-471J+P-AC | |
| C841 | CC, 50V, 470PF, 5%, 0603, COG | 150F-471J+P-AC | |
| C844 | CC, 50V, 1000p, 5%, 0805, 1.25X2.0, MURATA | 150F-103K+P-AC | |
| C845 | CC, 50V, 1000p, 5%, 0805, 1.25X2.0, MURATA | 150F-103K+P-AC | |
| C846 | CC, 50V, 1000p, 5%, 0805, 1.25X2.0, MURATA | 150F-103K+P-AC | |
| C847 | CC, 50V, 1000p, 5%, 0805, 1.25X2.0, MURATA | 150F-103K+P-AC | |
| C848 | CC, 50V, 1000p, 5%, 0805, 1.25X2.0, MURATA | 150F-103K+P-AC | |
| C849 | CC, 50V, 1000p, 5%, 0805, 1.25X2.0, MURATA | 150F-103K+P-AC | |
| C850 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102J+P-AC | |
| C851 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102J+P-AC | |
| C852 | CC, 100V, 0.1U, 10%, 1206, AVX | 150H-104K+6-CFD | |
| C853 | CC, 100V, 0.1U, 10%, 1206, AVX | 150H-104K+6-CFD | |

ELECTRICAL PART LIST

FreeSpace IZA 2120-HZ Rear Panel PCB Assembly

Capacitors (continued)

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|--|--------------------|------|
| C854 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C855 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C856 | CC, 50V, 1000p, 5%, 0805, 1.25X2.0, MURATA | 150F-103K+P-AC | |
| C857 | CC, 50V, 1000p, 5%, 0805, 1.25X2.0, MURATA | 150F-103K+P-AC | |
| C860 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C861 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C862 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C863 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C864 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C865 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C866 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C867 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C868 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C869 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C870 | CC, 50V, 0.01U, 5%, 0603 | 150F-103J+P-AC | |

Diodes

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---|--------------------|------|
| D704 | DIODE, BAV99, SOT23 | 4840-8970+3 | |
| D705 | DIODE, BAV99, SOT23 | 4840-8970+3 | |
| D706 | DIODE, BAV99, SOT23 | 4840-8970+3 | |
| D707 | DIODE, BAV99, SOT23 | 4840-8970+3 | |
| D710 | DIODE, BAV99, SOT23 | 4840-8970+3 | |
| D711 | DIODE, BAV99, SOT23 | 4840-8970+3 | |
| D712 | DIODE, BAV99, SOT23 | 4840-8970+3 | |
| D713 | DIODE, BAV99, SOT23 | 4840-8970+3 | |
| D714 | DIODE, BAV99, SOT23 | 4840-8970+3 | |
| D715 | DIODE, BAV99, SOT23 | 4840-8970+3 | |
| D716 | DOUBLE, DIODE, BAT54S, SOT-23, SCHOTTKY, SMD | 480T-54S0+3 | |
| Z700 | DZ, 1/2W, 6.2VB, SMD, LL-34, ROHM(RLZTE-116.2B) | 4837-6V21+3 | |
| Z701 | DZ, 1/2W, 6.2VB, SMD, LL-34, ROHM(RLZTE-116.2B) | 4837-6V21+3 | |
| Z702 | DZ, 1/2W, 6.2VB, SMD, LL-34, ROHM(RLZTE-116.2B) | 4837-6V21+3 | |
| Z703 | DZ, 1/2W, 6.2VB, SMD, LL-34, ROHM(RLZTE-116.2B) | 4837-6V21+3 | |

Transistors

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---|--------------------|------|
| Q708 | TR, MMBT4403LT1G, SMD | 4854-4030+3 | |
| Q709 | TR, MMBT4403LT1G, SMD | 4854-4030+3 | |
| Q710 | TR, MMBT4403LT1G, SMD | 4854-4030+3 | |
| Q711 | TR, MMBT4403LT1G, SMD | 4854-4030+3 | |
| Q712 | TR, MMBT4403LT1G, SMD | 4854-4030+3 | |
| Q713 | TR, MMBT4403LT1G, SMD | 4854-4030+3 | |
| Q714 | TR, MMBT4403LT1G, SMD | 4854-4030+3 | |
| Q715 | TR, MMBT4403LT1G, SMD | 4854-4030+3 | |
| Q719 | TR, NPN, MMBT4401, SOT-23, HFE:, 20-300, SM | 4854-4010+3 | |
| Q720 | TR, NPN, MMBT4401, SOT-23, HFE:, 20-300, SM | 4854-4010+3 | |

ELECTRICAL PART LIST

FreeSpace IZA 2120-HZ Rear Panel PCB Assembly

Integrated Circuits

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---|--------------------|------|
| U701 | IC, NJM2068M-#ZZZB, DUAL, OP, AMP | 3130-6890+0 | |
| U702 | IC, OP, AMP, SWITCH, NJM2120M, SOIC8, JRC | 3132-3711+0 | |
| U703 | IC, OP, AMP, SWITCH, NJM2120M, SOIC8, JRC | 3132-3711+0 | |
| U706 | IC, TL072CDR, DUAL, J-FET, INPUT, OP-AMP, (SMD) | 3130-8020+0 | |
| U708 | IC, TL072CDR, DUAL, J-FET, INPUT, OP-AMP, (SMD) | 3130-8020+0 | |
| U709 | IC, TL072CDR, DUAL, J-FET, INPUT, OP-AMP, (SMD) | 3130-8020+0 | |

Miscellaneous

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|--|--------------------|------|
| J701 | SOCKET, M, 2P, P5, 300V, 15A, BLACK | 2113-3361+1 | |
| J702 | RCA, JACK, F, 2P, P15, 30V, 0.3A, H=10+9.5, R/W | 2113-3153+2 | |
| J703 | RCA, JACK, F, 2P, P15, 30V, 0.3A, H=10+9.5, R/W | 2113-3153+2 | |
| J704 | RCA, JACK, F, 2P, P15, 30V, 0.3A, H=10+9.5, R/W | 2113-3153+2 | |
| J705 | SOCKET, EURO, BLOCK, 4P, P5, STRAIGHT, GREEN | 2113-3148+0 | |
| J707 | SOCKET, SPEAKER, 4P, P5, 250V, 12A, BLACK | 2113-3148+1 | |
| J711B | CONNECTOR, PIN, HEADER, 4P, P2.54, ST, F | 2101-3294+0 | |
| J712 | SOCKET, M, 5P, P5, 250V, 12A, GRN, ST | 2113-3421+0 | |
| J713 | SOCKET, M, 5P, P5, 250V, 12A, GRN, ST | 2113-3421+0 | |
| J715 | SOCKET, SPEAKER, 4P, P5, 250V, 12A, BLACK | 2113-3148+1 | |
| J717 | CONN, HEADER, 12P, P2.54, DIP, ST, M, L=8.54 | 2101-3410+0 | |
| J718 | CONN, HEADER, 12P, P2.54, DIP, ST, M, L=8.54 | 2101-3410+0 | |
| SW700 | SW, SLIDE, 1P5T, DC50V, 0.5A | 5200-5085+0 | |
| SW702 | SW, SLIDE, 1P5T, DC50V, 0.5A | 5200-5085+0 | |
| SW703 | SWITCH, SLIDE, DPDT, 50V, 0.5A, L=7 | 5200-5012+0 | |
| VR700 | VR, ROTARY, 100KAX2, 20%, V, L=15, 18TEETH, 90C, CTR | 4751-225E+1 | |
| VR701 | VR, ROTARY, 100KAX2, 20%, V, L=15, 18TEETH, 90C, CTR | 4751-225E+1 | |
| VR702 | VR, ROTARY, 10K/10CX1, 20%, V, L=15, 18TEETH, CTR | 4751-224E+0 | |
| VR704 | VR, ROTARY, 10K/10CX1, 20%, V, L=15, 18TEETH, CTR | 4751-224E+0 | |
| VR705 | VR, ROTARY, 20BKX1, 20%, V, L=15, 18TEETH, CTR | 4751-226E+0 | |
| VR706 | VR, ROTARY, 20BKX1, 20%, V, L=15, 18TEETH, CTR | 4751-226E+0 | |

ELECTRICAL PART LIST

FreeSpace® ZA 2120-HZ Rear Panel PCB Assembly

Resistors

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---------------------------------|--------------------|------|
| R402 | RMG, 1/16W, 4.7K, 1%, 0603/1608 | 4723-472A+P | |
| R403 | RMF, 1/4W, 2R2, 1%, 1206 | 4715-2R2A+6 | |
| R404 | RMG, 1/16W, 8.2K, 1% | 4723-822A+P | |
| R405 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A+P | |
| R406 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A+P | |
| R407 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A+P | |
| R408 | RMG, 1/16W, 470R, 1%, 0603 | 4723-471A+P-R | |
| R409 | RMG, 1/16W, 470R, 1%, 0603 | 4723-471A+P-R | |
| R410 | RMG, 1/16W, 820R, 1%, 0603 | 4723-821A+P-R | |
| R411 | RMG, 1/16W, 470R, 1%, 0603 | 4723-471A+P-R | |
| R412 | RMG, 1/16W, 470R, 1%, 0603 | 4723-471A+P-R | |
| R413 | RMG, 1/16W, 200K, 1%, 0603/1608 | 4723-221A+P | |
| R414 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A+P | |
| R415 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A+P | |
| R416 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A+P | |
| R417 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A+P | |
| R418 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A+P | |
| R419 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A+P | |
| R420 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A+P | |
| R421 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A+P | |
| R422 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A+P | |
| R423 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A+P | |
| R424 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A+P | |
| R425 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A+P | |
| R428 | RMG, 1/16W, 22K, 1%, 0603 | 4723-223A+P-R | |
| R429 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R430 | RMF, 1/4W, 2R2, 1%, 1206 | 4715-2R2A+6 | |
| R431 | RMG, 1/16W, 5.1K, 5%, 0603/1608 | 4723-512J+P | |
| R432 | RMG, 1/16W, 5.1K, 5%, 0603/1608 | 4723-512J+P | |
| R433 | RMG, 1/16W, 5.1K, 5% | 4723-512J+P | |
| R436 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R437 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R438 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R441 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R442 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R443 | RMG, 1/16W, 200K, 1%, 0603/1608 | 4723-222A+P | |
| R444 | RMG, 1/16W, 200K, 1%, 0603/1608 | 4723-222A+P | |
| R445 | RMG, 1/16W, 1K, 1%0603/1608 | 4723-102A+P | |
| R447 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R448 | RMG, 1/16W, 22K, 1%, 0603 | 4723-223A+P-R | |
| R700 | RMG, 1/16W, 1K, 1%0603/1608 | 4723-102A+P | |
| R701 | RMG, 1/16W, 1K, 1%0603/1608 | 4723-102A+P | |
| R702 | RMG, 1/16W, 4.7K, 1%, 0603/1608 | 4723-472A+P | |
| R703 | RMG, 1/16W, 4.7K, 1%, 0603/1608 | 4723-472A+P | |
| R704 | RMG, 1/16W, 3.3K, 1%, 0603 | 4723-332A+P-R | |
| R705 | RMG, 1/10W, 4.7M, 1%, 0603 | 4720-475A+P | |
| R706 | RMG, 1/10W, 4.7M, 1%, 0603 | 4720-475A+P | |
| R707 | RMG, 1/16W, 4.7K, 1%, 0603/1608 | 4723-472A+P | |
| R708 | RMG, 1/16W, 4.7K, 1%, 0603/1608 | 4723-472A+P | |
| R709 | RMG, 1/16W, 270R, 1%, 0603 | 4723-271A+P-R | |
| R710 | RMG, 1/16W, 270R, 1%, 0603 | 4723-271A+P-R | |

ELECTRICAL PART LIST

FreeSpace® ZA 2120-HZ Rear Panel PCB Assembly

Resistors (continued)

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---------------------------------|--------------------|------|
| R711 | RMG, 1/16W, 270R, 1%, 0603 | 4723-271A+P-R | |
| R712 | RMG, 1/16W, 270R, 1%, 0603 | 4723-271A+P-R | |
| R713 | RMG, 1/16W, 47K, 1%, 0603 | 4723-473A+P-R | |
| R714 | RMG, 1/16W, 47K, 1%, 0603 | 4723-473A+P-R | |
| R715 | RMG, 1/16W, 47K, 1%, 0603 | 4723-473A+P-R | |
| R716 | RMG, 1/16W, 47K, 1%, 0603 | 4723-473A+P-R | |
| R717 | RMG, 1/16W, 47K, 1%, 0603 | 4723-473A+P-R | |
| R718 | RMG, 1/16W, 47K, 1%, 0603 | 4723-473A+P-R | |
| R719 | RMG, 1/16W, 47K, 1%, 0603 | 4723-473A+P-R | |
| R720 | RMG, 1/16W, 47K, 1%, 0603 | 4723-473A+P-R | |
| R721 | RMG, 1/16W, 470R, 1%, 0603 | 4723-471A+P-R | |
| R722 | RMG, 1/16W, 470R, 1%, 0603 | 4723-471A+P-R | |
| R723 | RMG, 1/16W, 470R, 1%, 0603 | 4723-471A+P-R | |
| R724 | RMG, 1/16W, 470R, 1%, 0603 | 4723-471A+P-R | |
| R725 | RMG, 1/16W, 560K, 1%, 0603/1608 | 4723-564A+P | |
| R726 | RMG, 1/16W, 560K, 1%, 0603/1608 | 4723-564A+P | |
| R727 | RMG, 1/16W, 47K, 1%, 0603 | 4723-473A+P-R | |
| R728 | RMG, 1/16W, 47K, 1%, 0603 | 4723-473A+P-R | |
| R729 | RMG, 1/16W, 200K, 1%, 0603/1608 | 4723-204A+P | |
| R730 | RMG, 1/16W, 200K, 1%, 0603/1608 | 4723-204A+P | |
| R731 | RMG, 1/16W, 82K, 5%, 0603/1608 | 4723-823J+P | |
| R732 | RMG, 1/16W, 51K, 1%, 0603/16 | 4723-513A+P | |
| R733 | RMG, 1/16W, 82K, 5%, 0603/1608 | 4723-823J+P | |
| R734 | RMG, 1/16W, 51K, 1%, 0603/16 | 4723-513A+P | |
| R739 | RMG, 1/16W, 100R, 1%, 0603 | 4723-101A+P | |
| R740 | RMG, 1/16W, 100R, 1%, 0603 | 4723-101A+P | |
| R741 | RMG, 1/16W, 100R, 1%, 0603 | 4723-101A+P | |
| R742 | RMG, 1/16W, 100R, 1%, 0603 | 4723-101A+P | |
| R743 | RMG, 1/16W, 1K, 1%0603/1608 | 4723-102A+P | |
| R744 | RMG, 1/16W, 1K, 1%0603/1608 | 4723-102A+P | |
| R745 | RMG, 1/16W, 1K, 1%0603/1608 | 4723-102A+P | |
| R746 | RMG, 1/16W, 1K, 1%0603/1608 | 4723-102A+P | |
| R747 | RMG, 1/16W, 36K, 1%, 0603 | 4723-363A+P | |
| R748 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R749 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R751 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R752 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R753 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R754 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R755 | RMG, 1/16W, 36K, 1%, 0603 | 4723-363A+P | |
| R756 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R757 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R758 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R759 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R762 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R765 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R767 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R768 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R769 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R771 | RMG, 1/16W, 100R, 1%, 0603 | 4723-101A+P | |
| R772 | RMG, 1/16W, 100R, 1%, 0603 | 4723-101A+P | |

ELECTRICAL PART LIST

FreeSpace® ZA 2120-HZ Rear Panel PCB Assembly

Resistors (continued)

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|----------------------------------|--------------------|------|
| R773 | RMG, 1/16W, 100R, 1%, 0603 | 4723-101A+P | |
| R774 | RMG, 1/16W, 100R, 1%, 0603 | 4723-101A+P | |
| R776 | RMG, 1/16W, 100K, 1%, 0603 | 4723-104A+P-R | |
| R777 | RMG, 1/16W, 100K, 1%, 0603 | 4723-104A+P-R | |
| R778 | RMG, 1/16W, 9.53K, 1%, 0603/1608 | 4723-9531+P | |
| R779 | RMG, 1/16W, 9.53K, 1%, 0603/1608 | 4723-9531+P | |
| R780 | RMG, 1/16W, 12K, 1%, 0603 | 4723-123A+P-R | |
| R781 | RMG, 1/16W, 12K, 1%, 0603 | 4723-123A+P-R | |
| R782 | RMG, 1/16W, 200K, 1%, 0603/1608 | 4723-204A+P | |
| R783 | RMG, 1/16W, 200K, 1%, 0603/1608 | 4723-204A+P | |
| R786 | RMG, 1/16W, 270K, 1%, 0603 | 4723-274A+P | |
| R787 | RMG, 1/16W, 270K, 1%, 0603 | 4723-274A+P | |
| R788 | RMG, 1/16W, 3.9K, 1%, 0603/1608 | 4723-392A+P | |
| R789 | RMG, 1/16W, 3.9K, 1%, 0603/1608 | 4723-392A+P | |
| R790 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R791 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R792 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R793 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R794 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R795 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R796 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R797 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R798 | RMG, 1/16W, 100R, 1%, 0603 | 4723-101A+P | |
| R799 | RMG, 1/16W, 100R, 1%, 0603 | 4723-101A+P | |
| R804 | RMG, 1/16W, 100K, 1%, 0603 | 4723-104A+P-R | |
| R805 | RMG, 1/16W, 100K, 1%, 0603 | 4723-104A+P-R | |
| R806 | RMG, 1/16W, 100K, 1%, 0603 | 4723-104A+P-R | |
| R807 | RMG, 1/16W, 100K, 1%, 0603 | 4723-104A+P-R | |
| R808 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R809 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R810 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R811 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R812 | RMG, 1/16W, 36K, 1%, 0603 | 4723-363A+P | |
| R813 | RMG, 1/10W, 43K, 1%, 0805 | 4720-433A+J | |
| R814 | RMG, 1/16W, 36K, 1%, 0603 | 4723-363A+P | |
| R815 | RMG, 1/10W, 43K, 1%, 0805 | 4720-433A+J | |

Capacitors

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|--|--------------------|------|
| C402 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C404 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C406 | CT, 16V, 10U, 20%, SMD | 154D-106M+3-CF | |
| C408 | CC, 50V, 0.01U, 5%, 0603 | 150F-103J+P-AC | |
| C409 | CE, 25V, 10U, 20%, 5.3X5.4, SMD, UWX1E100MCR1GB, NCC | 157E-106M+3-JJC | |
| C411 | CE, 25V, 10U, 20%, 5.3X5.4, SMD, UWX1E100MCR1GB, NCC | 157E-106M+3-JJC | |
| C414 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C415 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C417 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |

ELECTRICAL PART LIST

FreeSpace® ZA 2120-HZ Rear Panel PCB Assembly

Capacitors (continued)

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|--------------------------------|--------------------|------|
| C739 | CT, 16V, 10U, 20%, SMD | 154D-106M+3-CF | |
| C740 | CT, 16V, 10U, 20%, SMD | 154D-106M+3-CF | |
| C741 | CT, 16V, 10U, 20%, SMD | 154D-106M+3-CF | |
| C742 | CT, 16V, 10U, 20%, SMD | 154D-106M+3-CF | |
| C743 | CT, 16V, 10U, 20%, SMD | 154D-106M+3-CF | |
| C744 | CT, 16V, 10U, 20%, SMD | 154D-106M+3-CF | |
| C745 | CC, 50V, 1U, 10%, 0805 | 150F-105K+J-BD | |
| C746 | CC, 50V, 1U, 10%, 0805 | 150F-105K+J-BD | |
| C747 | CC, 50V, 1U, 10%, 0805 | 150F-105K+J-BD | |
| C748 | CC, 50V, 1U, 10%, 0805 | 150F-105K+J-BD | |
| C750 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101J+P-AC | |
| C751 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101J+P-AC | |
| C752 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101J+P-AC | |
| C753 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101J+P-AC | |
| C754 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101J+P-AC | |
| C755 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101J+P-AC | |
| C756 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101J+P-AC | |
| C757 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101J+P-AC | |
| C758 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C759 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C760 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C761 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C764 | CT, 16V, 10U, 20%, SMD | 154D-106M+3-CF | |
| C765 | CT, 16V, 10U, 20%, SMD | 154D-106M+3-CF | |
| C766 | CT, 16V, 10U, 20%, SMD | 154D-106M+3-CF | |
| C767 | CT, 16V, 10U, 20%, SMD | 154D-106M+3-CF | |
| C768 | CT, 16V, 10U, 20%, SMD | 154D-106M+3-CF | |
| C769 | CT, 16V, 10U, 20%, SMD | 154D-106M+3-CF | |
| C770 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101J+P-AC | |
| C771 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101J+P-AC | |
| C772 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101J+P-AC | |
| C773 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101J+P-AC | |
| C774 | CT, 16V, 10U, 20%, SMD | 154D-106M+3-CF | |
| C775 | CT, 16V, 10U, 20%, SMD | 154D-106M+3-CF | |
| C776 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C777 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C778 | CC, 50V, 0.1U, 5%, 0603 | 150F-104J+P-AC | |
| C779 | CC, 50V, 0.1U, 5%, 0603 | 150F-104J+P-AC | |
| C780 | CC, 50V, 0.1U, 5%, 0603 | 150F-104J+P-AC | |
| C781 | CC, 50V, 0.1U, 5%, 0603 | 150F-104J+P-AC | |
| C782 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101J+P-AC | |
| C783 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101J+P-AC | |
| C784 | CC, 50V, 470PF, 5%, 0603, C0G | 150F-471J+P-AC | |
| C785 | CC, 50V, 470PF, 5%, 0603, C0G | 150F-471J+P-AC | |

Inductors

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---|--------------------|------|
| L402 | FERRITE, BEAD, CHIP, SEBW201209U121MT, 0805 | 1808-0872+0 | |

ELECTRICAL PART LIST

FreeSpace® ZA 2120-HZ Rear Panel PCB Assembly

Diodes

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---|--------------------|------|
| D402 | DIODE, FAST, 75V, 0.5A, BAS316, SOD323, SM | 480S-3160+3 | |
| D403 | DIODE, FAST, 75V, 0.5A, BAS316, SOD323, SM | 480S-3160+3 | |
| D404 | DIODE, FAST, 75V, 0.5A, BAS316, SOD323, SM | 480S-3160+3 | |
| D405 | DIODE, FAST, 75V, 0.5A, BAS316, SOD323, SM | 480S-3160+3 | |
| D706 | DIODE, 1SS355TE-17, ROHM | 4840-1660+0 | |
| D707 | DIODE, 1SS355TE-17, ROHM | 4840-1660+0 | |
| D708 | DIODE, 1SS355TE-17, ROHM | 4840-1660+0 | |
| D709 | DIODE, 1SS355TE-17, ROHM | 4840-1660+0 | |
| D710 | DIODE, 1SS355TE-17, ROHM | 4840-1660+0 | |
| D711 | DIODE, 1SS355TE-17, ROHM | 4840-1660+0 | |
| D712 | DIODE, 1SS355TE-17, ROHM | 4840-1660+0 | |
| D713 | DIODE, 1SS355TE-17, ROHM | 4840-1660+0 | |
| D714 | DIODE, 1SS355TE-17, ROHM | 4840-1660+0 | |
| D715 | DIODE, 1SS355TE-17, ROHM | 4840-1660+0 | |
| D716 | DIODE, BAV99, SOT23 | 4840-8970+3 | |
| D717 | DIODE, BAV99, SOT23 | 4840-8970+3 | |
| D718 | DIODE, BAV99, SOT23 | 4840-8970+3 | |
| D719 | DIODE, BAV99, SOT23 | 4840-8970+3 | |
| Z402 | DZ, 1/2W, 6.2VB, SMD, LL-34, ROHM(RLZTE-116.2B) | 4837-6V21+3 | |
| Z403 | DZ, 1/2W, 6.2VB, SMD, LL-34, ROHM(RLZTE-116.2B) | 4837-6V21+3 | |
| Z700 | DZ, 1/2W, 5V1, MMSZ5231B, SOD-123, SMD, PANJIT | 4837-5V18+3 | |
| Z701 | DZ, 1/2W, 5V1, MMSZ5231B, SOD-123, SMD, PANJIT | 4837-5V18+3 | |

Transistors

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|--|--------------------|------|
| U400 | IC, ASIC, SN74LVC2G17, DCK | 3132-7450+0 | |
| U401 | IC, REGULATOR, NJM7805DLA, TO-252 | 3132-7310+0 | |
| U402 | IC, MCU, S3F94C4, SOP20, SAM | 3132-9660+0-13 | |
| U403 | IC, NJM79M05DL1A-T-#ZZ, ZB, REG | 3132-3012+0 | |
| U404 | IC, CD74HC4051M96, SOIC | 3132-0780+0 | |
| U405 | IC, REGULATOR, +15V, 7815, DPAK/TO-252, AUK | 3132-8161+0-49 | |
| U406 | IC, REGULATOR, -15V, 7915, DPAK/TO-252, AUK | 3132-8171+0-49 | |
| U700 | IC, LM358AM, OPAMP, SO-8 | 3132-2501+0 | |
| U701 | IC, LM358AM, OPAMP, SO-8 | 3132-2501+0 | |
| U702 | IC, TL072CDR, DUAL, J-FET, INPUT, OP-AMP, (SMD | 3130-8020+0 | |
| U703 | IC, TL072CDR, DUAL, J-FET, INPUT, OP-AMP, (SMD | 3130-8020+0 | |
| U704 | IC, TL072CDR, DUAL, J-FET, INPUT, OP-AMP, (SMD | 3130-8020+0 | |
| U705 | IC, TL072CDR, DUAL, J-FET, INPUT, OP-AMP, (SMD | 3130-8020+0 | |
| U706 | IC, TL072CDR, DUAL, J-FET, INPUT, OP-AMP, (SMD | 3130-8020+0 | |
| U707 | IC, TL072CDR, DUAL, J-FET, INPUT, OP-AMP, (SMD | 3130-8020+0 | |

ELECTRICAL PART LIST

FreeSpace® ZA 2120-HZ Rear Panel PCB Assembly

Transistors (continued)

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|--|--------------------|------|
| U708 | IC, TL072CDR, DUAL, J-FET, INPUT, OP-AMP, (SMD | 3130-8020+0 | |
| U709 | IC, TL072CDR, DUAL, J-FET, INPUT, OP-AMP, (SMD | 3130-8020+0 | |
| U710 | IC, LM13700M/NOPB, TRANSCONDUCTANCE, AMP | 3132-1981+0 | |
| U711 | IC, TL072CDR, DUAL, J-FET, INPUT, OP-AMP, (SMD | 3130-8020+0 | |
| U712 | IC, 2CH, VOLUME, BD3812F, SOP14 | 3132-6071+0 | |
| U713 | IC, TL072CDR, DUAL, J-FET, INPUT, OP-AMP, (SMD | 3130-8020+0 | |

Miscellaneous

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---|--------------------|------|
| J401 | 5P, ST., WAFER, P=2.0, COULOMB | 2102-050S+003 | |
| J402 | WIRE-CONN, 6P, P2.0, #28, UL1007, L=480, RD/WH, F/M | 7013-4530+0 | |
| J403 | WIRE-CONN, 4P, P2.0, #28, UL1007, L=230, RD/WH, F/M | 7013-4540+0 | |
| J404 | WIRE-CONN, 7P, P2.0, #28, UL1007, L=140, RD/WH, F/M | 7013-4520+0 | |
| J405 | SOCKET, M, 2P, P5, 300V, 15A, BLACK | 2113-3361+1 | |
| J406 | SOCKET, M, 2P, P5, 300V, 15A, BLACK | 2113-3361+1 | |
| J407 | SOCKET, M, 2P, P5, 300V, 15A, BLACK | 2113-3361+1 | |
| J700 | RCA, JACK, F, 2P, P15, 30V, 0.3A, H=10+9.5, R/W | 2113-3153+2 | |
| J701 | CONN, FFC, 10P, P0.5, SMT, ST, F | 2101-3375+1 | |
| J702 | SOCKET, M, 5P, P5, 250V, 12A, GRN, ST | 2113-3421+0 | |
| SW400 | SWITCH, SLIDE, DPDT, 50V, 0.5A, L=7 | 5200-5012+0 | |
| SW401 | SWITCH, SLIDE, DPDT, 50V, 0.5A, L=7 | 5200-5012+0 | |
| SW700 | SWITCH, SLIDE, DPDT, 50V, 0.5A, L=7 | 5200-5012+0 | |
| SW701 | SWITCH, SLIDE, DPDT, 50V, 0.5A, L=7 | 5200-5012+0 | |
| VR400 | VR, ROTARY, 20BKX1, 20%, V, L=15, 18TEETH, CTR | 4751-226E+0 | |
| VR401 | VR, ROTARY, 20BKX1, 20%, V, L=15, 18TEETH, CTR | 4751-226E+0 | |

ELECTRICAL PART LIST

FreeSpace® IZA 2120-LZ and ZA 2120-LZ SMPS PCB Assembly

Resistors

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---------------------------------|--------------------|------|
| R200 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R202 | RMG, 1/16W, 6.8K, 1%, 0603/1608 | 4723-682A | |
| R203 | RMG, 1/16W, 3K, 1%, 0603 | 4723-302A | |
| R204 | RMG, 1/16W, 4.7K, 1%.0603/1608 | 4723-472A | |
| R206 | RMG, 1/10W, 82R, 5%, 0805 | 4720-820J | |
| R207 | RMG, 1/8W, 330K, 5%, 1206 | 4721-334J | |
| R208 | RMG, 1/8W, 330K, 5%, 1206 | 4721-334J | |
| R209 | RMG, 1/8W, 330K, 5%, 1206 | 4721-334J | |
| R210 | RMG, 1/8W, 330K, 5%, 1206 | 4721-334J | |
| R211 | RMG, 1/8W, 330K, 5%, 1206 | 4721-334J | |
| R212 | RMG, 1/8W, 330K, 5%, 1206 | 4721-334J | |
| R213 | RMG, 1/10W, 91K, 1%, 0603 | 4720-913A | |
| R214 | RMG, 1/10W, 75R, 5%, 0805 | 4720-750J | |
| R215 | RMG, 1/4W, 200K, 1%, 1206 | 4725-204A | |
| R216 | RMG, 1/8W, 0R, 1%, 1206 | 4721-000A | |
| R217 | RMG, 1/16W, 30K, 1%, 0603/1608 | 4723-303A | |
| R220 | RMG, 1/8W, 1.5K, 5%, 1206 | 4721-152J | |
| R221 | RMG, 1/8W, 1.5K, 5%, 1206 | 4721-152J | |
| R222 | RMG, 1/16W, 4.7K, 1%.0603/1608 | 4723-472A | |
| R223 | RMG, 1/16W, 51K, 1%, 0603/1608 | 4723-513A | |
| R224 | RMG, 1/16W, 56K, 1%, 0603 | 4723-563AR | |
| R225 | RMG, 1/16W, 560K, 1%, 0603/1608 | 4723-564A | |
| R226 | RMG, 1/16W, 13K, 1%, 0603 | 4723-133AR | |
| R227 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R228 | RMG, 1/10W, 15R, 1%, 0805 | 4720-150A | |
| R229 | RMG, 1/10W, 15R, 1%, 0805 | 4720-150A | |
| R230 | RMG, 1/10W, 62K, 5%, 0805 | 4720-623J | |
| R232 | RMG, 1/10W, 18K, 5%, 0805 | 4720-183J | |
| R233 | RMG, 1/4W, 100R, 1%, 1206 | 4725-101A | |
| R234 | RMG, 1/4W, 100R, 1%, 1206 | 4725-101A | |
| R235 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A | |
| R236 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A | |
| R240 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A | |
| R241 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A | |
| R242 | RMG, 1/8W, 2.2R, 5%, 1206 | 4721-2R2J | |
| R243 | RMG, 1/8W, 330K, 5%, 1206 | 4721-334J | |
| R244 | RMG, 1/8W, 330K, 5%, 1206 | 4721-334J | |
| R245 | RMG, 1/8W, 330K, 5%, 1206 | 4721-334J | |
| R246 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R248 | RMG, 1/8W, 47R, 5%, 1206 | 4721-470J | |
| R249 | RMG, 1/8W, 47R, 5%, 1206 | 4721-470J | |
| R251 | RMG, 1/8W, 47R, 5%, 1206 | 4721-470J | |
| R253 | RMG, 1W, 6.2K, 5%, 2512 | 4728-622J | |
| R254 | RMG, 1/4W, 5.1K, 5%, 1206 | 4725-512J | |
| R257 | RMG, 1/4W, 5.1K, 5%, 1206 | 4725-512J | |
| R262 | RMG, 1/16W, 10R, 1%, 0603 | 4723-100AR | |
| R263 | RMG, 1/16W, 10R, 1%, 0603 | 4723-100AR | |
| R264 | RMG, 1/16W, 10R, 1%, 0603 | 4723-100AR | |
| R265 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R266 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R267 | RMG, 1W, 6.2K, 5%, 2512 | 4728-622J | |
| R268 | RMG, 1/10W, 100R, 1%, 0805 | 4720-101A | |

ELECTRICAL PART LIST

FreeSpace® IZA 2120-LZ and ZA 2120-LZ SMPS PCB Assembly

Resistors (continued)

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---|--------------------|------|
| R270 | RMG, 1/16W, 100R, 1%, 0603 | 4723-101A | |
| R271 | RMG, 1/16W, 100R, 1%, 0603 | 4723-101A | |
| R272 | RMG, 1/16W, 100K, 1%, 0603 | 4723-104AR | |
| R273 | RMG, 1/16W, 100K, 1%, 0603 | 4723-104AR | |
| R274 | RMG, 1/4W, 200K, 1%, 1206 | 4725-204A | |
| R275 | RMG, 1/16W, 100K, 1%, 0603 | 4723-104AR | |
| R276 | RMG, 1/16W, 100K, 1%, 0603 | 4723-104AR | |
| R277 | RMG, 1/16W, 100K, 1%, 0603 | 4723-104AR | |
| R278 | RMG, 1/16W, 100K, 1%, 0603 | 4723-104AR | |
| R282 | RCF, 1/4W, 100K, 5%, AT | 4705-104J | |
| R283 | RCF, 1/4W, 100K, 5%, AT | 4705-104J | |
| R284 | RMG, 1/10W, 10K, 1%, 0805 | 4720-103A | |
| R285 | RMG, 1/16W, 1M, 1%, 0603 | 4723-105A | |
| R286 | RMG, 1/16W, 1M, 1%, 0603 | 4723-105A | |
| R287 | RMG, 1W, 0.33R, 1%, 2512 | 4728-R33A | |
| R288 | RMG, 1/16W, 16K, 1%, 0603/1608 | 4723-163A | |
| R289 | RMG, 1/16W, 16K, 1%, 0603/1608 | 4723-163A | |
| R290 | RMG, 1/16W, 470K, 1%, 0603 | 4723-474A | |
| R291 | RMG, 1/16W, 2K, 1%, 0603/1608 | 4723-202A | |
| R292 | RMG, 1/16W, 13K, 1%, 0603 | 4723-133AR | |
| R293 | RMG, 1/16W, 12K, 1%, 0603 | 4723-123AR | |
| R294 | RMG, 1/16W, 12K, 1%, 0603 | 4723-123AR | |
| R297 | RMG, 1/16W, 5.1K, 1%, 0603/1608 | 4723-512A | |
| R298 | RMG, 1/16W, 2K, 1%, 0603/1608 | 4723-202A | |
| R299 | RWR, 3W, 0.06R, 5%, ATSW, NON INDUCTIVE | 474A-R06JH | |
| R306 | RMG, 1/10W, 220R, 5%, 0805 | 4720-221J | |
| R307 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R308 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R309 | RMG, 1/16W, 1M, 1%, 0603 | 4723-105A | |
| R310 | RMG, 1/16W, 560K, 1%, 0603/1608 | 4723-564J | |
| R311 | RMG, 1/16W, 560K, 1%, 0603/1608 | 4723-564J | |
| R312 | RMG, 1/16W, 16K, 1%, 0603/1608 | 4723-163A | |
| R313 | RMG, 1/16W, 43K, 5%, 0603/1608 | 4723-433J | |
| R323 | RMG, 1/16W, 47K, 1%, 0603 | 4723-473AR | |
| R324 | RMG, 1/16W, 47K, 1%, 0603 | 4723-473AR | |
| R325 | RMG, 1/16W, 47K, 1%, 0603 | 4723-473AR | |
| R326 | RMG, 1/16W, 18K, 1%, 0603/1608 | 4723-183A | |
| R338 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R339 | RMG, 1/4W, 200K, 1%, 1206 | 4725-204A | |
| R340 | RMG, 1/4W, 200K, 1%, 1206 | 4725-204A | |
| R345 | RCF, 1/4W, 100K, 5%, AT | 4705-104J | |
| R346 | RCF, 1/4W, 100K, 5%, AT | 4705-104J | |
| R347 | RMG, 1/8W, 68K, 1%, 1206 | 4721-683A | |
| R348 | RMG, 1/16W, 4.7K, 1%.0603/1608 | 4723-472A | |
| R349 | RMF, 1W, 56K, 5%, ATS, METAL, OXIDE | 4718-563JX | |
| R350 | RMF, 1W, 56K, 5%, ATS, METAL, OXIDE | 4718-563JX | |
| R353 | RMG, 1/8W, 100R, 1%, 1206 | 4721-101A | |
| R354 | RMG, 1/16W, 100R, 1%, 0603 | 4723-101A | |
| R356 | VARISTOR, 320V, 10%, 6KV, 3KA, 10MM, RL | 4735-0016 | |

ELECTRICAL PART LIST

FreeSpace® IZA 2120-LZ and ZA 2120-LZ SMPS PCB Assembly

Capacitors

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|--|--------------------|--|
| C200 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C201 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C202 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C204 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C205 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C206 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C207 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C208 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C209 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102JAC | |
| C210 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102JAC | |
| C211 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102JAC | |
| C212 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102JAC | |
| C213 | CC, 50V, 120PF, 5%, 0603, C0G | 150F-121JAC | |
| C214 | CE, 50V, 10U, 20%, RLT, 5X11, 105C, RX, NOVER | 157F-106MIUTU | |
| C215 | CC, 25V, 10U, 10%, 1206, 3.2X1.6, X5R | 150E-106KCF | |
| C216 | CC, 25V, 10U, 10%, 1206, 3.2X1.6, X5R | 150E-106KCF | |
| C218 | CC, 50V, 0.01U, 5%, 0603 | 150F-103JAC | |
| C219 | CC, 50V, 0.01U, 5%, 0603 | 150F-103JAC | |
| C220 | CE, 50V, 2200UF, 20%, RL, 18X31, 105C | 157F-228M7\$T | |
| C221 | CE, 50V, 2200UF, 20%, RL, 18X31, 105C | 157F-228M7\$T | |
| C225 | CC, 500V, 0.022U, 10%, 1206 | 150L-223KCF | |
| C226 | CC, 500V, 0.022U, 10%, 1206 | 150L-223KCF | |
| C227 | CC, 630V, 0.1U, 10%, 1812, X7R | 150M-104KHF | |
| C232 | CC, 100V, 100pF, 10%, 0805, 1.2X2, NPO | 150H-101KBD | |
| C234 | CC, 100V, 100pF, 10%, 0805, 1.2X2, NPO | 150H-101KBD | |
| C235 | CC, 100V, 100pF, 10%, 0805, 1.2X2, NPO | 150H-101KBD | |
| C239 | CE, 35V, 100U, 20%, RLT, 6.3X11, 105C, LOW, ESR | 157Q-107MLUTR | |
| C243 | CC, 630V, 100P, 5%, 1206, 3.2X1.6 | 150M-101JCF | |
| C244 | CC, 630V, 100P, 5%, 1206, 3.2X1.6 | 150M-101JCF | |
| C245 | CC, 630V, 100P, 5%, 1206, 3.2X1.6 | 150M-101JCF | |
| C246 | CC, 630V, 100P, 5%, 1206, 3.2X1.6 | 150M-101JCF | |
| C247 | CC, 400V, 470P, +20%, RL, 9.5X8.0, AH09B471KLO | 150T-471MRO | 3  |
| C248 | CC, 400V, 470P, +20%, RL, 9.5X8.0, AH09B471KLO | 150T-471MRO | 3  |
| C249 | CE, 450V, 220U, 20%, RL, 35X30, SNAP-105C | 1574-227M^\$T | |
| C251 | CP, 275V, 0.47U, 20%, RB, 18X16 | 158Z-474M75 | |
| C252 | CP, 275V, 0.47U, 20%, RB, 18X16 | 158Z-474M75 | |
| C254 | CC, 1000V, 2200P, 10%, 1206, X7R | 150N-222KCF | |
| C255 | CC, 1000V, 2200P, 10%, 1206, X7R | 150N-222KCF | |
| C256 | CC, 50V, 1500pF, 10%, 0805, 1.2x2.0 | 150F-152KBD | |
| C257 | CM, 400V, 0.47U, 5%RB, 16X16, X7, METALLIZED, FARATRONIC | 153T-474J55M4 | |
| C259 | CC, 50V, 0.1uF, 10%, 0805, 1.2X2.0 | 150F-104KBD | |
| C260 | CC, 50V, 0.1uF, 10%, 0805, 1.2X2.0 | 150F-104KBD | |
| C261 | CC, 50V, 0.1uF, 10%, 0805, 1.2X2.0 | 150F-104KBD | |
| C262 | CC, 50V, 0.1uF, 10%, 0805, 1.2X2.0 | 150F-104KBD | |
| C264 | CC, 50V, 2200P, 5%, 0603, 0.8X1.6 | 150F-222JAC | |
| C265 | CC, 50V, 0.47U, 10%, 0805, 1.25X2, X7R | 150F-474KBD | |

ELECTRICAL PART LIST

FreeSpace® IZA 2120-LZ and ZA 2120-LZ SMPS PCB Assembly

Capacitors (continued)

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|--|--------------------|------|
| C266 | CC, 50V, 0.1uF, 10%, 0805, 1.2X2.0 | 150F-104KBD | |
| C267 | CE, 25V, 470U, 20%, RLT, 10X16, 105C, RX, NOVER | 157E-477MS5TU | |
| C268 | CE, 25V, 470U, 20%, RLT, 10X16, 105C, RX, NOVER | 157E-477MS5TU | |
| C269 | CE, 25V, 470U, 20%, RLT, 10X16, 105C, RX, NOVER | 157E-477MS5TU | |
| C270 | CE, 25V, 470U, 20%, RLT, 10X16, 105C, RX, NOVER | 157E-477MS5TU | |
| C271 | CE, 35V, 100U, 20%, RLT, 6.3X11, 105C, LOW, ESR | 157Q-107MLUTR | |
| C273 | CC, 50V, 0.47U, 10%, 0805, 1.25X2, X7R | 150F-474KBD | |
| C274 | CC, 500V, 0.022U, 10%, 1206 | 150L-223KCF | |
| C275 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101JAC | |
| C276 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101JAC | |
| C277 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101JAC | |
| C278 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101JAC | |
| C279 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101JAC | |
| C280 | CE, 35V, 47U, 20%, RLT, 6.3X11, 105C, RX, NOVER | 157Q-476MLUTU | |
| C282 | CM, 630V, 0.1U, 10%, RB, 17X16X10, P15, FARATRONIC | 153M-104K654 | |
| C283 | CM, 630V, 0.1U, 10%, RB, 17X16X10, P15, FARATRONIC | 153M-104K654 | |
| C284 | CC, 50V, 1U, 10%, 0805 | 150F-105KBD | |
| C285 | CC, 50V, 0.01U, 5%, 0603 | 150F-103JAC | |
| C287 | CC, 250V, 0.1U, 10%, X7R, 1206, 1.6X3.2 | 150R-104KCF | |
| C288 | CC, 250V, 0.1U, 10%, X7R, 1206, 1.6X3.2 | 150R-104KCF | |
| C289 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C290 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C293 | CC, 50V, 0.01U, 5%, 0603 | 150F-103JAC | |
| C294 | CC, 50V, 0.01U, 5%, 0603 | 150F-103JAC | |
| C295 | CC, 50V, 0.01U, 5%, 0603 | 150F-103JAC | |
| C296 | CE, 16V, 470U, 20%, RLT, 10X12.5, 105C, LOW ESR | 157D-477MSXTR | |
| C297 | CE, 16V, 470U, 20%, RLT, 10X12.5, 105C, LOW ESR | 157D-477MSXTR | |
| C298 | CC, 50V, 0.1uF, 10%, 0805, 1.2X2.0 | 150F-104KBD | |
| C299 | CC, 50V, 0.1uF, 10%, 0805, 1.2X2.0 | 150F-104KBD | |
| C303 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C306 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C307 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C308 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C310 | CER2, 1206, X7R, 50V, 100N, PM10, R | 150F-104KCF | |
| C311 | CER2, 1206, X7R, 50V, 100N, PM10, R | 150F-104KCF | |
| C312 | CC, 630V, 0.1U, 10%, 1812, X7R | 150M-104KHF | |
| C313 | CC, 50V, 0.47U, 10%, 0805, 1.25X2, X7R | 150F-474KBD | |
| C314 | CC, 500V, 0.022U, 10%, 1206 | 150L-223KCF | |
| C315 | CC, 630V, 0.1U, 10%, 1812, X7R | 150M-104KHF | |

ELECTRICAL PART LIST

FreeSpace® IZA 2120-LZ and ZA 2120-LZ SMPS PCB Assembly

Inductors

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|--|--------------------|------|
| L202 | FERRITE BEAD, CHIP, SEBW201209U121MT, 0805 | 1808-0872 | |
| L203 | FERRITE BEAD, CHIP, SEBW201209U121MT, 0805 | 1808-0872 | |
| L204 | FERRITE BEAD, CHIP, SEBW201209U121MT, 0805 | 1808-0872 | |
| L205 | FERRITE BEAD, CHIP, SEBW201209U121MT, 0805 | 1808-0872 | |
| L208 | FERRITE BEAD, CHIP, SEBW201209U121MT, 0805 | 1808-0872 | |
| L211 | FERRITE BEAD, CHIP, SEBW201209U121MT, 0805 | 1808-0872 | |
| L212 | FERRITE BEAD, INDUCTOR, BL01RN1A1F1J | 1808-0680 | |
| L213 | FERRITE BEAD, INDUCTOR, BL01RN1A1F1J | 1808-0680 | |

Diodes

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|--|--------------------|--|
| BR200 | DIODE, BRIDGE, 600V, 8A, GBU8J, RL | 4840-9211 | 3  |
| D200 | DIODE, IN5408-B, 3A, 1000V | 4805-4080 | |
| D201 | DIODE, SCHOTTKY, SK16, DO-214AA, 60V, 1A, SMD, PANJIT | 480S-K160 | |
| D202 | DIODE, SCHOTTKY, 650V, 6A, IDH06G65C5, TO-220, RL | 4806-5C50 | |
| D203 | DIODE, SCHOTTKY, 200V, 20A, MBR20200FCT, ITO-220AB, RL | 4800-FCT0 | |
| D204 | DIODE, SCHOTTKY, 200V, 20A, MBR20200FCT, ITO-220AB, RL | 4800-FCT0 | |
| D205 | DIODE, SCHOTTKY, 200V, 20A, MBR20200FCT, ITO-220AB, RL | 4800-FCT0 | |
| D206 | DIODE, SCHOTTKY, 200V, 20A, MBR20200FCT, ITO-220AB, RL | 4800-FCT0 | |
| D207 | DIODE, SCHOTTKY, 40V, 2A, SK24, SMB, SM, PANJIT | 480S-K240 | |
| D208 | DIODE, BAV99, SOT23, PHILIPS | 4840-8970 | |
| D209 | DIODE, ULTRA, 600V, 1A, MURS, 160T3, SMB, CASE403A, SM | 4806-0T30 | |
| D210 | DIODE, ULTRA, 600V, 1A, MURS, 160T3, SMB, CASE403A, SM | 4806-0T30 | |
| D211 | DIODE, ULTRA, 600V, 1A, MURS, 160T3, SMB, CASE403A, SM | 4806-0T30 | |
| D212 | DIODE, ULTRA, 600V, 1A, MURS, 160T3, SMB, CASE403A, SM | 4806-0T30 | |
| D213 | DIODE, SUPPRESSOR, 200V, P6KE200A, AT | 4802-00A0 | |
| D214 | DIODE, 600V, 1A, 75NS, US1J, SOD124 | 480U-S1J0 | |
| D216 | DIODE, FAST, 75V, 0.5A, BAS316, SOD323, SM | 480S-3160 | |
| D217 | DIODE, FAST, 75V, 0.5A, BAS316, SOD323, SM | 480S-3160 | |
| D218 | DIODE, FAST, 75V, 0.5A, BAS316, SOD323, SM | 480S-3160 | |
| D219 | DIODE, FAST, 75V, 0.5A, BAS316, SOD323, SM | 480S-3160 | |
| D223 | DIODE, RECT, 200V, 2A, ER2D, SMB/DO-214AA, SM | 480E-R2D0 | |

ELECTRICAL PART LIST

FreeSpace® IZA 2120-LZ and ZA 2120-LZ SMPS PCB Assembly

Diodes (continued)

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---|--------------------|------|
| D224 | DIODE, RECT, 200V, 2A, ER2D, SMB/DO-214AA, SM | 480E-R2D0 | |
| D226 | RECTIFIER, ES1D, 200V, 1.1A, SMD | 4840-9190 | |
| D232 | DIODE, SCHOTTKY, SK16, DO-214AA, 60V, 1A, SMD, PANJIT | 480S-K160 | |
| DZ202 | DZ, 1/2W, 15V, 5%, SOD-123C, MMSZ5245BT1G | 4837-15V9 | |
| Z200 | DZ, 1/2W, 15V, 5%, SOD-123C, MMSZ5245BT1G | 4837-15V9 | |
| Z201 | DZ, 1/2W, 18V, 5%, SOD-123C, MMSZ5248BT1G | 4837-18V9 | |
| Z203 | DZ, 1/2W, 18V, 5%, SOD-123C, MMSZ5248BT1G | 4837-18V9 | |

Transistors

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|--|--------------------|------|
| Q200 | MOSFET, N-CH, 600V, 12A, FQPF12N60C, TO-220F, RL | 490N-60C0 | |
| Q201 | MOSFET, N-CH, 600V, 12A, FQPF12N60C, TO-220F, RL | 490N-60C0 | |
| Q205 | TR, NPN, BCP56-10, SOT223 | 485C-P560 | |
| Q206 | MOSFET, N-CH, 800V, TK6A80E, 6A, TO-220SIS, RL | 490A-80E0 | |
| Q207 | TR, 3904, HFE, 100-300, SM | 4860-0640 | |
| Q208 | TR, 3904, HFE, 100-300, SM | 4860-0640 | |
| Q209 | MOSFET, N-CH, 600V, 10A, STP11NM60ND, TO-220, RL | 4906-0ND0 | |
| Q211 | TR, NPN, BCP56-10, SOT223 | 485C-P560 | |
| Q212 | MOSFET, N-CH, 60V, 115MA, 2N7002, SOT-23, SM | 4907-0020 | |

Integrated Circuits

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|--|--------------------|--|
| U200 | IC, DRIVER, NCP5181DR2G, SOIC-8 | 3132-8471 | |
| U201 | IC, LM19, THERMAL SENSOR, TO-92, NS | 3132-2581 | |
| U202 | IC, LM339, SMD, COMPARATOR | 3132-1250 | |
| U203 | PHOTOCOUPLER, EL817S1, S1 | 4818-17S1 | |
| U204 | PHOTOCOUPLER, EL817S1, S1 | 4818-17S1 | 3  |
| U205 | PHOTOCOUPLER, EL817S1, S1 | 4818-17S1 | 3  |
| U206 | IC, REGULATOR, 5V, LM78L05ACM, SO-8 | 3131-3390 | |
| U207 | IC, PFC, CONTROLLER, IR1155S, SO8 | 3132-9880 | |
| U208 | IC, POWER, NCP1271, SO-8, ONSEMI | 3132-806111 | |
| U209 | IC, LLC, SMPS, UCC25600, SOIC-8 | 3132-8371 | |
| U210 | IC, REGULATOR, TL432BIDBZR, SOT-23-3, TI | 3132-769116 | |
| U211 | IC, REGULATOR, TL432BIDBZR, SOT-23-3, TI | 3132-769116 | |
| U212 | PHOTOCOUPLER, EL817S1, S1 | 4818-17S1 | 3  |
| U213 | IC, NJM78M05DL1A-#ZZZB, REGULATOR | 3132-2101 | |

ELECTRICAL PART LIST

FreeSpace® IZA 2120-LZ and ZA 2120-LZ SMPS PCB Assembly

Miscellaneous

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---|--------------------|--|
| CLAMP SMPS | CLAMP, IC, SUS301, T=1, NATURAL, 3/4H | 4136-0932 | |
| F200 | FUSE, 4A, 250V, 8.5X8, EU/CCC, RLT | 5120-1180 | 3  |
| HEATSINK | SCREW, MACHINE, BIND, HEAD, M3X8, CROSS-RECESS, BZ | 2904-3008 | |
| HS SMPS | HEATSINK, SMPS, 14X30, L120, AL-EXT, ANODIZE, BLACK | 5401-0701 | |
| HS SMPS | HEATSINK, SMPS, 14X30, L=70, AL-EXT, ANODIZE, BLACK | 5401-0702 | |
| HS200 | HEATSINK, IC, 25.4X12.7X30, AL, PLATE, MSMGMA100 | 5401-0181 | |
| J201 | 7, PIN, WAFER, P2.0(COULUMB) | 2102-070S | |
| J202 | WAFER, 3PIN, P=3.96 | 2101-3065 | |
| J203 | WAFER, 3P, P7.92/11.88, STRAIGHT | 2101-3097 | |
| J204 | JM24182-2P, WAFER | 2101-9120 | |
| NTC200 | THERMISTOR, NTC, 10R, 20%, 240VAC, 5A, -40-200C, AL | 5202-0028 | 3  |
| NUT | NUT, HEX, M3X22X5.4, YZ | 2640-302 | |
| SCREW | SCREW, M3X10, W/S&F, WASHER, (BLK) | 2900-3010 | |
| SCREW M3 | SCREW, MACHINE, PAN, M3X8, CROSS-RECESS, BZ | 2900-3008 | |
| SILICON | INSULATN-SHEET, SIL-PAD, 800, 18X13 | 3101-0611 | |
| T200 | TRANS, PWR, 385V/40V, 40W, 4A, ER40 | 1806-4234 | 3  |
| T201 | CHOKE, COMMON MODE, 10MH, MIN, 5A, AT | 1805-0090 | 3  |
| T202 | CHOKE, COIL, 940UH, 15%, 8A, MI | 1805-0520 | 3  |
| T203 | CHOKE, COMMON MODE, 10MH, MIN, 5A, AT | 1805-0090 | 3  |
| T204 | TRANS, PWR, 385V, 40W, ER28 | 1806-4236 | 3  |
| WASHER | WASHER, METAL, ID, 3.3, OD8, T=0.5 | 2600-3005 | |

ELECTRICAL PART LIST

FreeSpace® IZA 2120-LZ and ZA 2120-LZ Amplifier PCB Assembly

Resistors

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|--------------------------------|--------------------|------|
| R1 | RMF, 1/2W, 10R, 1%, 1210 | 4717-100A | |
| R2 | RMF, 1/2W, 10R, 1%, 1210 | 4717-100A | |
| R3 | RMG, 1/16W, 4.7K, 5%, 0603 | 4723-472JR | |
| R4 | RMG, 1/16W, 470K, 5%, 0603 | 4723-474JR | |
| R5 | RMG, 1/16W, 470K, 5%, 0603 | 4723-474JR | |
| R6 | RMG, 1/10W, 0R, 1%, 0805 | 4720-000A | |
| R14 | RMG, 1/4W, 20R, 1%, 1206 | 4725-200A | |
| R15 | RMG, 1/4W, 20R, 1%, 1206 | 4725-200A | |
| R16 | RMG, 1/4W, 20R, 1%, 1206 | 4725-200A | |
| R17 | RMG, 1/4W, 20R, 1%, 1206 | 4725-200A | |
| R18 | RMG, 1/8W, 4.7K, 1%, 1206 | 4721-472A | |
| R19 | RMG, 1/8W, 4.7K, 1%, 1206 | 4721-472A | |
| R20 | RMG, 1/16W, 10K, 5%, 0603 | 4723-103JR | |
| R21 | RMG, 1/16W, 10K, 5%, 0603 | 4723-103JR | |
| R22 | RMG, 1/16W, 100R, 5%, 0603 | 4723-101JR | |
| R23 | RMG, 1/16W, 100K, 5%, 0603 | 4723-104JR | |
| R24 | RMG, 1/16W, 100K, 5%, 0603 | 4723-104JR | |
| R25 | RMG, 1/16W, 100K, 5%, 0603 | 4723-104JR | |
| R26 | RMG, 1/16W, 100K, 5%, 0603 | 4723-104JR | |
| R27 | RMG, 1/16W, 100K, 5%, 0603 | 4723-104JR | |
| R28 | RMG, 1/10W, 30K, 5%, 0805 | 4720-303J | |
| R29 | RMG, 1W, 47R, 5%, 2512 | 4728-470J | |
| R30 | RMG, 1W, 47R, 5%, 2512 | 4728-470J | |
| R31 | RMG, 1W, 47R, 5%, 2512 | 4728-470J | |
| R32 | RMG, 1W, 47R, 5%, 2512 | 4728-470J | |
| R33 | RMG, 1/16W, 15K, 5%, 0603, HK | 4723-153JR | |
| R34 | RMG, 1/16W, 15K, 5%, 0603, HK | 4723-153JR | |
| R35 | RMG, 1/16W, 15K, 5%, 0603, HK | 4723-153JR | |
| R36 | RMG, 1/16W, 15K, 5%, 0603, HK | 4723-153JR | |
| R37 | RMG, 1/16W, 20K, 1%, 0603/1608 | 4723-203A | |
| R38 | RMG, 1/16W, 11K, 1%, 0603/1608 | 4723-113A | |
| R40 | RMG, 1/16W, 10K, 5%, 0603 | 4723-103JR | |
| R41 | RMG, 1/16W, 11K, 1%, 0603/1608 | 4723-113A | |
| R42 | RMG, 1/16W, 10K, 5%, 0603 | 4723-103JR | |
| R43 | RMG, 1/16W, 10K, 5%, 0603 | 4723-103JR | |
| R44 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R45 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R46 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R47 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |

Capacitors

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|--------------------------------------|--------------------|------|
| C1 | CC, 50V, 0.015U, 5%, 0603, 0.8X1.6 | 150F-153JAC | |
| C2 | CC, 50V, 0.015U, 5%, 0603, 0.8X1.6 | 150F-153JAC | |
| C3 | CC, 100V, 0.1U, 10%, 0805, X7R | 150H-104KBD | |
| C4 | CC, 100V, 0.1U, 10%, 0805, X7R | 150H-104KBD | |
| C5 | CC, 100V, 470N, 10%, 1210, X7R | 150H-474KDF | |
| C6 | CT, 16V, 47U, 10%, SMD, 85C, 6.0X3.2 | 154D-476KKF | |
| C7 | CC, 50V, 1U, 10%, 0805 | 150F-105KBD | |
| C8 | CC, 50V, 1U, 10%, 0805 | 150F-105KBD | |

ELECTRICAL PART LIST

FreeSpace® IZA 2120-LZ and ZA 2120-LZ Amplifier PCB Assembly

Capacitors (continued)

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---|--------------------|------|
| C9 | CE, 100V, 47U, 20%, RLT10X16, LOW ESR, 105C, WB, SAMWHA | 157H-476MS5RT | |
| C10 | CC, 25V, 4.7U, 10%, 0805, X5R | 150E-475KBD | |
| C11 | CC, 25V, 4.7U, 10%, 0805, X5R | 150E-475KBD | |
| C12 | CC, 25V, 4.7U, 10%, 0805, X5R | 150E-475KBD | |
| C13 | CC, 25V, 4.7U, 10%, 0805, X5R | 150E-475KBD | |
| C14 | CER2, 1206, X7R, 50V, 100N, PM10, R | 150F-104KCF | |
| C15 | CER2, 1206, X7R, 50V, 100N, PM10, R | 150F-104KCF | |
| C16 | CER2, 1206, X7R, 50V, 100N, PM10, R | 150F-104KCF | |
| C17 | CER2, 1206, X7R, 50V, 100N, PM10, R | 150F-104KCF | |
| C18 | CER2, 1206, X7R, 50V, 100N, PM10, R | 150F-104KCF | |
| C19 | CER2, 1206, X7R, 50V, 100N, PM10, R | 150F-104KCF | |
| C20 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101JAC | |
| C21 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101JAC | |
| C22 | CC, 100V, 0.22uF, 20%, 1206, Y5V | 150H-224MCF | |
| C23 | CC, 100V, 0.22uF, 20%, 1206, Y5V | 150H-224MCF | |
| C24 | CC, 50V, 0.1uF, 10%, 0805, 1.2X2.0 | 150F-104KBD | |
| C25 | CC, 50V, 0.1uF, 10%, 0805, 1.2X2.0 | 150F-104KBD | |
| C26 | CC, 50V, 0.1uF, 10%, 0805, 1.2X2.0 | 150F-104KBD | |
| C27 | CC, 50V, 0.1uF, 10%, 0805, 1.2X2.0 | 150F-104KBD | |
| C30 | CE, 50V, 820U, 20%, RLT, 12.5X25, 105C | 157F-827MX&T | |
| C31 | CE, 50V, 820U, 20%, RLT, 12.5X25, 105C | 157F-827MX&T | |
| C32 | CC, 50V, 220pF, 5%, 0805, 1.2X2.0 | 150F-221JBD | |
| C33 | CC, 50V, 220pF, 5%, 0805, 1.2X2.0 | 150F-221JBD | |
| C34 | CC, 50V, 220pF, 5%, 0805, 1.2X2.0 | 150F-221JBD | |
| C35 | CC, 50V, 220pF, 5%, 0805, 1.2X2.0 | 150F-221JBD | |
| C36 | CM, 100V, 0.47U, 5%, RBT, 7.2X10X5 | 153H-474JNS | |
| C37 | CM, 100V, 0.47U, 5%, RBT, 7.2X10X5 | 153H-474JNS | |
| C38 | CC, 50V, 47pF, 5%, 0805, 1.2x2 | 150F-470JBD | |
| C39 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C40 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C41 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C42 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C43 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102JAC | |
| C44 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102JAC | |
| C45 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102JAC | |
| C46 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102JAC | |
| C47 | CC, 100V, 0.22uF, 20%, 1206, Y5V | 150H-224MCF | |

Inductors

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---------------------------------------|--------------------|------|
| L1 | INDUCTOR, 22UH, 20%, 29.5X11, AL | 1803-0122 | |
| L2 | INDUCTOR, 22UH, 20%, 29.5X11, AL | 1803-0122 | |
| L3 | FERRITE, BEAD, INDUCTOR, BL01RN1A1F1J | 1808-0680 | |
| L4 | FERRITE, BEAD, INDUCTOR, BL01RN1A1F1J | 1808-0680 | |

Diodes

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|------------------------|--------------------|------|
| Z1 | DZ, 1/2W, 5.6V, SMD | 4837-5V69 | |
| Z2 | DZ, 1/2W, 27V, 10%, SM | 4837-2709 | |

ELECTRICAL PART LIST

FreeSpace® IZA 2120-LZ and ZA 2120-LZ Amplifier PCB Assembly

Transistors

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|--------------------------------|--------------------|------|
| Q1 | TR, 2N2222, SMD, MMBT2222ALT1G | 4860-5410 | |

Integrated Circuits

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|--|--------------------|------|
| U1 | IC, POWER, 8954TH, SOP24, NXP | 3132-923151 | |
| U2 | IC, TL072CDR, DUAL J-FET, INPUT, OP-AMP, (SMD) | 3130-8020 | |

Miscellaneous

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---|--------------------|------|
| HS LZ AMP | HEATSINK, AMP, LOZ, 62X23.1, L=100, AL-EXT | 5401-0284 | |
| J3 | WAFER, 4P, P2.0, STRAIGHT | 2102-040S | |
| J4 | WAFER, 3PIN, P=3.96 | 2101-3065 | |
| J5 | CONN, FFC, 10P, P0.5, SMT, ST, F | 2101-3375 | |
| J6 | WAFER, 4P, P3.96, STRAIGHT, MALE | 2101-3053 | |
| SCREW | SCREW, MACHINE, PAN, M3X8, CROSS-RECESS, BZ | 2900-3008 | |
| SILICON | INSULATN-SHEET, SIL-PAD, 800, 28X45 | 3101-0601 | |
| T1 | CHOKE-COMMON MODE, 2X16UH, 8A, FT50-43 | 1806-3913 | |
| T2 | CHOKE-COMMON MODE, 2X16UH, 8A, FT50-43 | 1806-3913 | |

FreeSpace IZA 2120-LZ and ZA 2120-LZ LED & Output PCB Assembly

Capacitors

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|----------------------------|--------------------|------|
| C701 | CC, 630V, 1000P, 10%, 1206 | 150M-102KCF | |
| C702 | CC, 630V, 1000P, 10%, 1206 | 150M-102KCF | |
| C703 | CC, 630V, 1000P, 10%, 1206 | 150M-102KCF | |
| C704 | CC, 630V, 1000P, 10%, 1206 | 150M-102KCF | |

Diodes

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|--|--------------------|------|
| D950 | LED, SP, 3X5, RD/GN, SUPER, WHITE, DIFFUSED, EVERLIGHT | 3700-2861 | |
| D951 | LED, 3MM, BLUE, SP, SLR343BB, T, 225419, ROHM | 3700-2824 | |
| D952 | LED, SP, 3X5, RD/GN, SUPER, WHITE, DIFFUSED, EVERLIGHT | 3700-2861 | |

Diodes

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---|--------------------|------|
| J710 | WIRE-CONN, 4P, P3.96, #18, UL1007, L=230, F/M | 7013-3991 | |
| J720 | SOCKET, F, 2P, P5.08, 300V, 12A, GRN, ST | 2113-3420 | |
| J721 | SOCKET, F, 2P, P5.08, 300V, 12A, GRN, ST | 2113-3420 | |
| J903 | SHEET, GROUND, BRASS, T=0.8, TIN, PLATED | 4136-0991 | |
| J950 | WAFER, 6, PIN, P2.0 | 2102-060R | |

ELECTRICAL PART LIST

FreeSpace® IZA 2120-LZ DSP PCB Assembly

Resistors

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|----------------------------------|--------------------|------|
| R400 | RMG, 1/16W, 3.3K, 1%, 0603 | 4723-332AR | |
| R401 | RMG, 1/16W, 3.3K, 1%, 0603 | 4723-332AR | |
| R402 | RMG, 1/16W, 3.3K, 1%, 0603 | 4723-332AR | |
| R403 | RMG, 1/16W, 3.3K, 1%, 0603 | 4723-332AR | |
| R404 | RMG, 1/16W, 30.9K, 1%, 0603/1608 | 4723-3092 | |
| R406 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R407 | RMG, 1/16W, 4.7K, 1%.0603/1608 | 4723-472A | |
| R408 | RMG, 1/16W, 4.7K, 1%.0603/1608 | 4723-472A | |
| R409 | RMG, 1/16W, 4.7K, 1%.0603/1608 | 4723-472A | |
| R410 | RMG, 1/16W, 4.7K, 1%.0603/1608 | 4723-472A | |
| R411 | RMG, 1/16W, 4.7K, 1%.0603/1608 | 4723-472A | |
| R412 | RMG, 1/16W, 4.7K, 1%.0603/1608 | 4723-472A | |
| R413 | RMG, 1/16W, 4.7K, 1%.0603/1608 | 4723-472A | |
| R414 | RMG, 1/16W, 4.7K, 1%.0603/1608 | 4723-472A | |
| R415 | RMG, 1/16W, 33R, 1%, 0603 | 4723-330A | |
| R416 | RMG, 1/16W, 33R, 1%, 0603 | 4723-330A | |
| R417 | RMG, 1/16W, 33R, 1%, 0603 | 4723-330A | |
| R418 | RMG, 1/16W, 33R, 1%, 0603 | 4723-330A | |
| R419 | RMG, 1/16W, 5.1K, 1%, 0603/1608 | 4723-512A | |
| R420 | RMG, 1/16W, 9.76K, 1%, 0603 | 4723-9761 | |
| R421 | RMG, 1/16W, 9.76K, 1%, 0603 | 4723-9761 | |
| R422 | RMG, 1/16W, 9.76K, 1%, 0603 | 4723-9761 | |
| R423 | RMG, 1/16W, 9.76K, 1%, 0603 | 4723-9761 | |
| R424 | RMG, 1/16W, 9.76K, 1%, 0603 | 4723-9761 | |
| R425 | RMG, 1/16W, 9.76K, 1%, 0603 | 4723-9761 | |
| R426 | RMG, 1/16W, 715R, 1%, 0603 | 4723-7150 | |
| R427 | RMG, 1/16W, 715R, 1%, 0603 | 4723-7150 | |
| R428 | RMG, 1/16W, 8.2K, 1%, 0603/1608 | 4723-822A | |
| R429 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R430 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R431 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R432 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R433 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R434 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R435 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R436 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R437 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R438 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R439 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R440 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R454 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R456 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R457 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R458 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R460 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R462 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R463 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R467 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R469 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R470 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R471 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R472 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |

ELECTRICAL PART LIST

FreeSpace® IZA 2120-LZ DSP PCB Assembly

Resistors (continued)

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---------------------------------|--------------------|------|
| R473 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R479 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R480 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R481 | RMG, 1/16W, 220R, 1%, 0603/1608 | 4723-221A | |
| R482 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R483 | RMG, 1/16W, 220R, 1%, 0603/1608 | 4723-221A | |
| R484 | RMG, 1/16W, 220R, 1%, 0603/1608 | 4723-221A | |
| R485 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R486 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R487 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R488 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R489 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R490 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R491 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R492 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R493 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R494 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R495 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R496 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R497 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R498 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R499 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R500 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R501 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R502 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R503 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R504 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R505 | RMG, 1/16W, 220R, 1%, 0603/1608 | 4723-221A | |
| R506 | RMG, 1/16W, 220R, 1%, 0603/1608 | 4723-221A | |
| R509 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R510 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R511 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R512 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R513 | RCFA, 1/16W, 47RX4, 5%, 0603 | 4703-470J04 | |
| R514 | RCFA, 1/16W, 47RX4, 5%, 0603 | 4703-470J04 | |
| R515 | RCFA, 1/16W, 47RX4, 5%, 0603 | 4703-470J04 | |
| R516 | RCFA, 1/16W, 47RX4, 5%, 0603 | 4703-470J04 | |
| R517 | RCFA, 1/16W, 47RX4, 5%, 0603 | 4703-470J04 | |
| R518 | RCFA, 1/16W, 47RX4, 5%, 0603 | 4703-470J04 | |
| R519 | RCFA, 1/16W, 47RX4, 5%, 0603 | 4703-470J04 | |
| R520 | RCFA, 1/16W, 47RX4, 5%, 0603 | 4703-470J04 | |
| R522 | RMG, 1/16W, 220R, 1%, 0603/1608 | 4723-221A | |
| R529 | RMG, 1/16W, 47R, 1%, 0603 | 4723-470A | |
| R530 | RMG, 1/16W, 220R, 1%, 0603/1608 | 4723-221A | |
| R531 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R533 | RMG, 1/16W, 2.2K, 1%, 0603/1608 | 4723-222A | |
| R534 | RMG, 1/16W, 2.2K, 1%, 0603/1608 | 4723-222A | |
| R535 | RMG, 1/16W, 2.2K, 1%, 0603/1608 | 4723-222A | |
| R536 | RMG, 1/16W, 2.2K, 1%, 0603/1608 | 4723-222A | |
| R537 | RMG, 1/16W, 22K, 1%, 0603 | 4723-223AR | |
| R549 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R550 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |

ELECTRICAL PART LIST

FreeSpace® IZA 2120-LZ DSP PCB Assembly

Resistors (continued)

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|-------------------------------|--------------------|------|
| R551 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R552 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A | |
| R553 | RMG, 1/16W, 392R, 1%, 0603 | 4723-3920 | |
| R554 | RMG, 1/16W, 392R, 1%, 0603 | 4723-3920 | |
| R555 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A | |
| R556 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A | |
| R557 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A | |
| R558 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A | |
| R559 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A | |
| R561 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A | |
| R565 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A | |
| R568 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A | |
| R569 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A | |
| R572 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A | |
| R573 | RMG, 1/10W, 13.7K, 1%, 0603 | 4720-1372 | |
| R574 | RMG, 1/16W, 3.3K, 1%, 0603 | 4723-332AR | |
| R575 | RMG, 1/16W, 3.3K, 1%, 0603 | 4723-332AR | |
| R576 | RMG, 1/10W, 13.7K, 1%, 0603 | 4720-1372 | |
| R577 | RMG, 1/16W, 3.3K, 1%, 0603 | 4723-332AR | |
| R578 | RMG, 1/10W, 13.7K, 1%, 0603 | 4720-1372 | |
| R579 | RMG, 1/16W, 3.3K, 1%, 0603 | 4723-332AR | |
| R580 | RMG, 1/10W, 13.7K, 1%, 0603 | 4720-1372 | |
| R581 | RMG, 1/16W, 13K, 1%, 0603 | 4723-133AR | |
| R582 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R583 | RMG, 1/16W, 13K, 1%, 0603 | 4723-133AR | |
| R584 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R585 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R586 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R587 | RMG, 1/16W, 13K, 1%, 0603 | 4723-133AR | |
| R588 | RMG, 1/16W, 13K, 1%, 0603 | 4723-133AR | |
| R589 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R590 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R591 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R592 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R597 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R598 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R599 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R600 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R601 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R602 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R603 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R604 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R605 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R606 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R607 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R608 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R609 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R610 | RMG, 1/16W, 100R, 1%, 0603 | 4723-101A | |
| R611 | RMG, 1/16W, 100R, 1%, 0603 | 4723-101A | |
| R612 | RMG, 1/16W, 100R, 1%, 0603 | 4723-101A | |
| R613 | RMG, 1/16W, 100R, 1%, 0603 | 4723-101A | |
| R614 | RMG, 1/16W, 100K, 1%, 0603 | 4723-104AR | |

ELECTRICAL PART LIST

FreeSpace® IZA 2120-LZ DSP PCB Assembly

Resistors (continued)

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---------------------------------|--------------------|------|
| R615 | RMG, 1/16W, 100K, 1%, 0603 | 4723-104AR | |
| R616 | RMG, 1/16W, 1M, 1%, 0603 | 4723-105A | |
| R617 | RMG, 1/16W, 1R, 5%, 0603 | 4723-1R0J | |
| R618 | RMG, 1/16W, 1R, 5%, 0603 | 4723-1R0J | |
| R621 | RMG, 1/16W, 220R, 1%, 0603/1608 | 4723-221A | |
| R622 | RMG, 1/16W, 13K, 1%, 0603 | 4723-133AR | |
| R623 | RMG, 1/16W, 13K, 1%, 0603 | 4723-133AR | |
| R635 | RMG, 1/16W, 22K, 1%, 0603 | 4723-223AR | |
| R646 | RMG, 1/16W, 1.5K, 1%, 0603 | 4723-152AR | |
| R648 | RMG, 1W, 5.1R, 5%, 2512 | 4728-5R1J | |
| R649 | RMG, 1W, 5.1R, 5%, 2512 | 4728-5R1J | |
| R650 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R651 | RMG, 1/16W, 47K, 1%, 0603 | 4723-473AR | |
| R652 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R653 | RMG, 1/16W, 3.9K, 5%, 0603 | 4723-392JR | |
| R654 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R655 | RMG, 1/16W, 200K, 1%, 0603/1608 | 4723-204A | |
| R656 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R657 | RMG, 1/16W, 100K, 1%, 0603 | 4723-104AR | |
| R658 | RMG, 1/10W, 20K, 1%, 0603 | 4720-203A | |
| R659 | RMG, 1/16W, 47R, 1%, 0603 | 4723-470A | |

Capacitors

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---|--------------------|------|
| C400 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C401 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C402 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C403 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C404 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C405 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C406 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C407 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C408 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102JAC | |
| C409 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102JAC | |
| C410 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102JAC | |
| C411 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102JAC | |
| C412 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102JAC | |
| C413 | CC, 25V, 10U, 10%, 1206, 3.2X1.6, X5R | 150E-106KCF | |
| C414 | CC, 50V, 0.01U, 5%, 0603 | 150F-103JAC | |
| C415 | CC, 50V, 0.01U, 5%, 0603 | 150F-103JAC | |
| C416 | CT, 16V, 10U, 20%, SMD, 1.6X3.2 | 154D-106MCF | |
| C417 | CT, 16V, 47U, 10%, SMD, 85C, 6.0X3.2 | 154D-476KKF | |
| C418 | CE, 10V, 22U, 20%, SM, 3X5.3, 85C-2000H | 157C-226MEJ | |
| C419 | CC, 6.3V, 22U, 10%, 1206, 3.2X1.6 | 150B-226KCF | |
| C420 | CC, 6.3V, 22U, 10%, 1206, 3.2X1.6 | 150B-226KCF | |
| C426 | CC, 16V, 1U, 10%, 0603, 0.8X1.6 | 150D-105KAC | |
| C427 | CC, 50V, 33PF, 5%, 0603, C0G | 150F-330JAC | |
| C428 | CC, 50V, 33PF, 5%, 0603, C0G | 150F-330JAC | |
| C430 | CC, 6.3V, 4.7U, 10%, 0603 | 150B-475KAC | |
| C431 | CC, 6.3V, 4.7U, 10%, 0603 | 150B-475KAC | |
| C432 | CC, 6.3V, 4.7U, 10%, 0603 | 150B-475KAC | |

ELECTRICAL PART LIST

FreeSpace® IZA 2120-LZ DSP PCB Assembly

Capacitors (continued)

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|--|--------------------|------|
| C433 | CC, 6.3V, 4.7U, 10%, 0603 | 150B-475KAC | |
| C434 | CC, 6.3V, 4.7U, 10%, 0603 | 150B-475KAC | |
| C435 | CC, 50V, 2700PF, 10%, 0603, X7R | 150F-272KAC | |
| C436 | CC, 50V, 270P, 10%, 0603, 1x2 | 150F-271KAC | |
| C437 | CC, 50V, 270P, 10%, 0603, 1x2 | 150F-271KAC | |
| C438 | CC, 50V, 270P, 10%, 0603, 1x2 | 150F-271KAC | |
| C439 | CC, 50V, 270P, 10%, 0603, 1x2 | 150F-271KAC | |
| C440 | CC, 50V, 220PF, 5%, 0603, C0G | 150F-221JAC | |
| C441 | CC, 50V, 220PF, 5%, 0603, C0G | 150F-221JAC | |
| C442 | CC, 50V, 220PF, 5%, 0603, C0G | 150F-221JAC | |
| C443 | CC, 50V, 220PF, 5%, 0603, C0G | 150F-221JAC | |
| C444 | CT, 6.3V, 100uF, 20%, SMD, 3.5X2.8MM | 154B-107MFE | |
| C445 | CE, 35V, 47U, 20%, SM, 6.6X5.7, LOW ESR, LELON | 157Q-476MMKR5 | |
| C446 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102JAC | |
| C447 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102JAC | |
| C448 | CE, 35V, 47U, 20%, SM, 6.6X5.7, LOW ESR, LELON | 157Q-476MMKR5 | |
| C449 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106MEJ | |
| C450 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106MEJ | |
| C451 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106MEJ | |
| C452 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106MEJ | |
| C453 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106MEJ | |
| C454 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106MEJ | |
| C455 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106MEJ | |
| C456 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106MEJ | |
| C457 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106MEJ | |
| C458 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106MEJ | |
| C461 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106MEJ | |
| C462 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106MEJ | |
| C463 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106MEJ | |
| C464 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106MEJ | |
| C465 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106MEJ | |
| C466 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106MEJ | |
| C467 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106MEJ | |
| C468 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106MEJ | |
| C469 | CC, 50V, 22P, 5%, 0603, C0G | 150F-220JAC | |
| C470 | CC, 50V, 22P, 5%, 0603, C0G | 150F-220JAC | |
| C471 | CC, 50V, 22P, 5%, 0603, C0G | 150F-220JAC | |
| C472 | CC, 50V, 22P, 5%, 0603, C0G | 150F-220JAC | |
| C473 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101JAC | |
| C474 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101JAC | |
| C475 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101JAC | |
| C476 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101JAC | |
| C477 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101JAC | |
| C479 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101JAC | |
| C481 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101JAC | |
| C482 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101JAC | |
| C483 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101JAC | |
| C484 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101JAC | |
| C485 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101JAC | |

ELECTRICAL PART LIST

FreeSpace® IZA 2120-LZ DSP PCB Assembly

Capacitors (continued)

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|--|--------------------|------|
| C486 | CE, 25V, 220U, 20%, SM, 8.4X10, LOW ESR, LELON | 157E-227MPSR5 | |
| C487 | CE, 25V, 100UF, 20%, 6.3X7.7, SMD | 157E-107MLO | |
| C488 | CE, 25V, 100UF, 20%, 6.3X7.7, SMD | 157E-107MLO | |
| C489 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C490 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C491 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C492 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C493 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C494 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C495 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C496 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C497 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C498 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C499 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C500 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C503 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C504 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C505 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C511 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C512 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102JAC | |
| C513 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C514 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102JAC | |
| C515 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C516 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C517 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C518 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C519 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C520 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C521 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C522 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C523 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C524 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C525 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C526 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C527 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C528 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C529 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C530 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C531 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C534 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C535 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C536 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C537 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C538 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C539 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C540 | CC, 50V, 560P, 10%, 0603/1608, 1X2 | 150F-561KAC | |
| C541 | CC, 50V, 560P, 10%, 0603/1608, 1X2 | 150F-561KAC | |
| C542 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C543 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C544 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C545 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |

ELECTRICAL PART LIST

FreeSpace® IZA 2120-LZ DSP PCB Assembly

Capacitors (continued)

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|--|--------------------|------|
| C546 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C547 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C548 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C549 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C550 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C551 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C552 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C553 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C554 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C555 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C556 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C557 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C558 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C559 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C560 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C561 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C562 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C563 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C564 | CE, 25V, 10U, 20%, 5.3X5.4, SMD, UWX1E100MCR1GB, NCC | 157E-106MJJC | |
| C565 | CE, 35V, 47U, 20%, SM, 6.6X5.7, LOW ESR, LELON | 157Q-476MMKR5 | |

Inductors

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|--|--------------------|------|
| L400 | INDUCTOR, 22UH, 20%, 8.1X8, B1000AS-220M=P3, SMD, TOKO | 1803-0103 | |
| L401 | FERRITE, BEAD, CHIP, SEBW201209U121MT, 0805 | 1808-0872 | |
| L404 | FERRITE, BEAD, CHIP, SEBW201209U121MT, 0805 | 1808-0872 | |
| L405 | FERRITE, BEAD, CHIP, SEBW201209U121MT, 0805 | 1808-0872 | |
| L407 | FERRITE, BEAD, CHIP, SEBW201209U121MT, 0805 | 1808-0872 | |
| L408 | FERRITE, BEAD, CHIP, SEBW201209U121MT, 0805 | 1808-0872 | |
| L409 | FERRITE, CHIP, 0603, BLM18AG102SN1D, MURATA | 1808-0878 | |
| L410 | FERRITE, CHIP, 0603, BLM18AG102SN1D, MURATA | 1808-0878 | |
| L411 | FERRITE, CHIP, 0603, BLM18AG102SN1D, MURATA | 1808-0878 | |
| L412 | FERRITE, CHIP, 0603, BLM18AG102SN1D, MURATA | 1808-0878 | |
| L415 | FERRITE, CHIP, 0603, BLM18AG102SN1D, MURATA | 1808-0878 | |
| L416 | FERRITE, CHIP, 0603, BLM18AG102SN1D, MURATA | 1808-0878 | |

ELECTRICAL PART LIST

FreeSpace® IZA 2120-LZ DSP PCB Assembly

Diodes

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|--|--------------------|------|
| D400 | DIODE, SCHOTTKY, SK16, DO-214AA, 60V, 1A, SMD, PANJIT | 480S-K160 | |
| D401 | DIODE, SCHOTTKY, 40V, 3A, ST, PS3L40S, DO-214AB, SMD, ST | 480L-40S0 | |
| D402 | DIODE, BAV99, SOT23, PHILIPS | 4840-8970 | |
| D403 | DIODE, BAV99, SOT23, PHILIPS | 4840-8970 | |
| D404 | DIODE, BAV99, SOT23, PHILIPS | 4840-8970 | |
| D405 | DIODE, BAV99, SOT23, PHILIPS | 4840-8970 | |
| D407 | LED, SMD, 2.0X1.25X0.8, RD, SUPER, EVLITE | 3700-7839 | |
| D408 | LED, SMD, 2.0X1.25X0.8, GN, SUPER, EVLITE | 3700-7839 | |
| D409 | DIODE, FAST, 75V, 0.5A, BAS316, SOD323, SM | 480S-3160 | |
| D410 | DIODE, FAST, 75V, 0.5A, BAS316, SOD323, SM | 480S-3160 | |
| D411 | DIODE, FAST, 75V, 0.5A, BAS316, SOD323, SM | 480S-3160 | |
| D412 | DIODE, FAST, 75V, 0.5A, BAS316, SOD323, SM | 480S-3160 | |
| D413 | DIODE, FAST, 75V, 0.5A, BAS316, SOD323, SM | 480S-3160 | |
| D414 | DIODE, FAST, 75V, 0.5A, BAS316, SOD323, SM | 480S-3160 | |
| D415 | LED, SMD, 2.0X1.25X0.8, RD, SUPER, EVLITE | 3700-7839 | |

Transistors

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|--|--------------------|------|
| Q405 | TR, NPN, 2SC3326, HFE:, 350-1200, 2-3F1A, SM | 4860-1890 | |
| Q406 | TR, NPN, 2SC3326, HFE:, 350-1200, 2-3F1A, SM | 4860-1890 | |
| Q408 | TR, KTA1504Y | 4851-504Y | |
| Q409 | TR, MMBT4403LT1G, SMD | 4854-4030 | |
| Q410 | TR, MMBT3906LT1G, SMD | 4860-1980 | |

Integrated Circuits

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|--|--------------------|------|
| U400 | IC, MCU, LPC111U35FBD48, LQF | 3132-9481 | |
| U401 | IC, FLASH, MX25L4006EM1, 8-SOP | 3132-8711 | |
| U402 | IC, DSP, AUDIO, TAS3204, PQFP-64 | 3132-8131 | |
| U403 | IC, REG, NCP1117ST33T3G, 3.3V, SOT-223, ONSEMI | 3132-148111 | |
| U404 | IC, 16-CH, DEMULTIPLEXER, 74HC4067M96, SO24, TEXAS | 3132-3021 | |
| U405 | IC, 16-CH, DEMULTIPLEXER, 74HC4067M96, SO24, TEXAS | 3132-3021 | |
| U406 | IC, OP, AMP, SMD, 105C, BA4560RF, SOP8 | 3132-7011 | |
| U407 | IC, SETP-DOWN, CONVERTER, MP1591DN, SOIC8N, MPS | 3132-4711 | |
| U408 | IC, ASIC, SN74LVC2G17, DCK | 3132-7450 | |
| U409 | IC, TL072CDR, DUAL, J-FET, INPUT, OP-AMP, (SMD) | 3130-8020 | |
| U410 | IC, TL072CDR, DUAL, J-FET, INPUT, OP-AMP, (SMD) | 3130-8020 | |
| U411 | IC, TL072CDR, DUAL, J-FET, INPUT, OP-AMP, (SMD) | 3130-8020 | |
| U413 | IC, TL072CDR, DUAL, J-FET, INPUT, OP-AMP, (SMD) | 3130-8020 | |

ELECTRICAL PART LIST

FreeSpace® IZA 2120-LZ DSP PCB Assembly

Integrated Circuits (continued)

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---|--------------------|------|
| U414 | IC, TL072CDR, DUAL, J-FET, INPUT, OP-AMP, (SMD) | 3130-8020 | |
| U415 | IC, REGULATOR, 7815, DPAK/TO-252, AUK | 3132-816149 | |
| U416 | IC, REGULATOR, -15V, 7915, DPAK/TO-252, AUK | 3132-817149 | |

Miscellaneous

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---|--------------------|------|
| J400 | FFC, CONN., 30PIN, P1.0, TOP, ENTRY | 2101-3073 | |
| J401 | FFC, CONN., 30PIN, P1.0, TOP, ENTRY | 2101-3073 | |
| J402 | CONN, PIN, HEADER, 5P, P2.54, DIP, ST, M, 1X5P, H11.6 | 2101-3422 | |
| J403 | WAFER, 4P, P2.0, STRAIGHT | 2102-040S | |
| J404 | 7, PIN, WAFER, P2.0(COULUMB) | 2102-070S | |
| J405 | CONN, FFC, 10P, P0.5, SMT, ST, F | 2101-3375 | |
| J406 | CONNECTOR, FFC, 25P, P1.0, TOP, ENTRY | 2101-3043 | |
| X400 | CRYSTAL, 24.576MHZ, 20PPM, SM, HC-49-SMD | 2300-3290 | |
| X401 | CRYSTAL, 12MHZ, -40, C, SMD | 2300-2430 | |

FreeSpace IZA 2120-LZ Front Panel PCB Assembly

Resistors

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---------------------------------|--------------------|------|
| R900 | RMG, 1/16W, 100R, 1%, 0603 | 4723-101A | |
| R901 | RMG, 1/16W, 5.1K, 1%, 0603/1608 | 4723-512A | |
| R902 | RMG, 1/16W, 5.1K, 1%, 0603/1608 | 4723-512A | |
| R903 | RMG, 1/16W, 5.1K, 1%, 0603/1608 | 4723-512A | |
| R904 | RMG, 1/16W, 715R, 1%, 0603 | 4723-7150 | |
| R905 | RMG, 1/16W, 715R, 1%, 0603 | 4723-7150 | |
| R906 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R907 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R908 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R909 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R910 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R911 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R912 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R913 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R914 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103AR | |
| R915 | RMG, 1/16W, 100R, 1%, 0603 | 4723-101A | |
| R916 | RMG, 1/16W, 100R, 1%, 0603 | 4723-101A | |
| R917 | RMG, 1/16W, 100R, 1%, 0603 | 4723-101A | |
| R918 | RMG, 1/16W, 100R, 1%, 0603 | 4723-101A | |
| R919 | RMG, 1/16W, 100R, 1%, 0603 | 4723-101A | |
| R920 | RMG, 1/16W, 100R, 1%, 0603 | 4723-101A | |
| R921 | RMG, 1/16W, 100R, 1%, 0603 | 4723-101A | |
| R922 | RMG, 1/10W, 100R, 1%, 0805 | 4720-101A | |
| R923 | RMG, 1/10W, 100R, 1%, 0805 | 4720-101A | |
| R924 | RMG, 1/16W, 1M, 1%, 0603 | 4723-105A | |
| R925 | RMG, 1/16W, 1M, 1%, 0603 | 4723-105A | |
| R926 | RMG, 1/10W, 24.3K, 1%, 0603 | 4720-2432 | |
| R927 | RMG, 1/10W, 24.3K, 1%, 0603 | 4720-2432 | |

ELECTRICAL PART LIST

FreeSpace® IZA 2120-LZ DSP Front Panel Assembly

Resistors (continued)

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---------------------------|--------------------|------|
| R928 | RMG, 1/16W, 1R, 5%, 0603 | 4723-1R0J | |
| R929 | RMG, 1/16W, 1R, 5%, 0603 | 4723-1R0J | |
| R930 | RMG, 1/16W, 13K, 1%, 0603 | 4723-133AR | |
| R931 | RMG, 1/16W, 13K, 1%, 0603 | 4723-133AR | |

Capacitors

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---|--------------------|------|
| C900 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102JAC | |
| C901 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102JAC | |
| C902 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C903 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C904 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C905 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C906 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C907 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C908 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C909 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C910 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C911 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C912 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C913 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |
| C914 | CC, 50V, 0.01uF, 10%, 0603, X7R | 150F-103KAC | |
| C915 | CC, 50V, 0.01uF, 10%, 0603, X7R | 150F-103KAC | |
| C916 | CC, 50V, 0.01uF, 10%, 0603, X7R | 150F-103KAC | |
| C917 | CC, 50V, 0.01uF, 10%, 0603, X7R | 150F-103KAC | |
| C918 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106MEJ | |
| C919 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106MEJ | |
| C920 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106MEJ | |
| C921 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106MEJ | |
| C922 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106MEJ | |
| C923 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106MEJ | |
| C924 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101JAC | |
| C925 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101JAC | |
| C926 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101JAC | |
| C927 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101JAC | |
| C928 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101JAC | |
| C929 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101JAC | |
| C930 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101JAC | |
| C931 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101JAC | |
| C932 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104KAC | |

Diodes

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|--|--------------------|------|
| D900 | DIODE, BAV99, SOT23 | 4840-8970 | |
| D901 | DIODE, BAV99, SOT23 | 4840-8970 | |
| D902 | DIODE, BAV99, SOT23 | 4840-8970 | |
| D903 | DOUBLE, DIODE, BAT54S, SOT-23, SCHOTTKY, SMD | 480T-54S0 | |
| D904 | DOUBLE, DIODE, BAT54S, SOT-23, SCHOTTKY, SMD | 480T-54S0 | |

ELECTRICAL PART LIST

FreeSpace® IZA 2120-LZ Front Panel PCB Assembly

Integrated Circuits

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---|--------------------|------|
| U710 | IC, ESD, PROTECTION, TPD2E001, SOT533 | 3132-7831 | |
| U900 | IC, OP, AMP, SMD, 105C, BA4560RF, SOP8 | 3132-7011 | |
| U901 | IC, TL072CDR, DUAL, J-FET, INPUT, OP-AMP, (SMD) | 3130-8020 | |
| U902 | IC, TL072CDR, DUAL, J-FET, INPUT, OP-AMP, (SMD) | 3130-8020 | |
| U903 | IC, TL072CDR, DUAL, J-FET, INPUT, OP-AMP, (SMD) | 3130-8020 | |

Miscellaneous

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---|--------------------|------|
| J711A | CONNECTOR, PIN, HEADER, 4P, P2.54, ST, M, L=15 | 2101-3295 | |
| J714 | USB-B, CONN, F, 4PIN, P2.5, 30V, 1.5A, 12X11, SIL | 2113-3428 | |
| J900 | WIRE-CONN, 6P, P2.0, #28, UL1007, L=220, RD/WH, F/M | 7013-4531 | |
| J901 | INLET, EARPHONE, 50V, 1A, 3.5MM | 2113-3332 | |
| J902 | CONNECTOR, FFC, 25P, P1.0, TOP, ENTRY | 2101-3043 | |
| J951 | BRACKET, GROUND, BRASS, T=0.8, TIN, PLATED | 4132-6223 | |
| SW702 | SW, DIP, SPST, 24V, 25MA, P2.54, 6P | 5200-5077 | |
| SW704 | SWITCH, DIP, SPST, 24V, 25MA, P2.54, 4PIN | 5200-5019 | |
| SW900 | SWITCH, SLIDE, DPDT, 50V, 0.5A, L=14, METAL, ROCKER | 5200-5013 | |
| VR900 | VR, ROTARY, B20KX1, 20%, C.C, V, L=30, 40TEETH, CTR | 4751-227E | |
| VR901 | VR, ROTARY, B20KX1, 20%, C.C, V, L=30, 40TEETH, CTR | 4751-227E | |
| VR902 | VR, ROTARY, B20KX1, 20%, V, L=15 | 4751-2280 | |

ELECTRICAL PART LIST

FreeSpace® IZA 2120-LZ Rear Panel PCB Assembly

Resistors

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---------------------------------|--------------------|------|
| R700 | RMG, 1/16W, 27K, 1%, 0603/1608 | 4723-273A+P | |
| R701 | RMG, 1/16W, 27K, 1%, 0603/1608 | 4723-273A+P | |
| R702 | RMG, 1/16W, 3K, 1%, 0603 | 4723-302A+P | |
| R703 | RMG, 1/16W, 3K, 1%, 0603 | 4723-302A+P | |
| R704 | RMG, 1/16W, 47K, 1%, 0603 | 4723-473A+P-R | |
| R705 | RMG, 1/16W, 47K, 1%, 0603 | 4723-473A+P-R | |
| R706 | RMG, 1/16W, 5.1K, 1%, 0603/1608 | 4723-512A+P | |
| R707 | RMG, 1/16W, 5.1K, 1%, 0603/1608 | 4723-512A+P | |
| R708 | RMG, 1/16W, 5.1K, 1%, 0603/1608 | 4723-512A+P | |
| R709 | RMG, 1/16W, 5.1K, 1%, 0603/1608 | 4723-512A+P | |
| R710 | RMG, 1/8W, 0R, 1%, 1206 | 4721-000A+6 | |
| R711 | RMG, 1/8W, 0R, 1%, 1206 | 4721-000A+6 | |
| R714 | RMG, 1/16W, 4.99K, 1%, 0603 | 4723-4991+P | |
| R715 | RMG, 1/16W, 4.99K, 1%, 0603 | 4723-4991+P | |
| R716 | RMG, 1/16W, 4.99K, 1%, 0603 | 4723-4991+P | |
| R717 | RMG, 1/16W, 4.99K, 1%, 0603 | 4723-4991+P | |
| R719 | RMG, 1/16W, 9.76K, 1%, 0603 | 4723-9761+P | |
| R720 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A+P | |
| R721 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A+P | |
| R727 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A+P | |
| R729 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A+P | |
| R731 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A+P | |
| R732 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A+P | |
| R739 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A+P | |
| R740 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A+P | |
| R741 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A+P | |
| R742 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A+P | |
| R743 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A+P | |
| R744 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A+P | |
| R745 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A+P | |
| R746 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A+P | |
| R747 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A+P | |
| R749 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R752 | RMG, 1/16W, 10R, 1%, 0603 | 4723-100A+P-R | |
| R753 | RMG, 1/16W, 10R, 1%, 0603 | 4723-100A+P-R | |
| R754 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R755 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R756 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R757 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R758 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R759 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R760 | RMG, 1/16W, 1.5K, 1%, 0603 | 4723-152A+P-R | |
| R761 | RMG, 1/16W, 2.7K, 1%, 0603/1608 | 4723-272A+P | |
| R762 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A+P | |
| R763 | RMG, 1/16W, 5.1K, 1%, 0603/1608 | 4723-512A+P | |
| R764 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R765 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R766 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R771 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R778 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R779 | RMG, 1/16W, 100K, 1%, 0603 | 4723-104A+P-R | |
| R780 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |

ELECTRICAL PART LIST

FreeSpace® IZA 2120-LZ Rear Panel PCB Assembly

Resistors (continued)

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---------------------------------|--------------------|------|
| R781 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R782 | RMG, 1/16W, 100K, 1%, 0603 | 4723-104A+P-R | |
| R783 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R784 | RMG, 1/16W, 100K, 1%, 0603 | 4723-104A+P-R | |
| R785 | RMG, 1/16W, 100K, 1%, 0603 | 4723-104A+P-R | |
| R786 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R787 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R794 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R795 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R796 | RMG, 1/16W, 100K, 1%, 0603 | 4723-104A+P-R | |
| R797 | RMG, 1/16W, 100K, 1%, 0603 | 4723-104A+P-R | |
| R798 | RMG, 1/16W, 100K, 1%, 0603 | 4723-104A+P-R | |
| R799 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R800 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R801 | RMG, 1/16W, 100K, 1%, 0603 | 4723-104A+P-R | |
| R802 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R803 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R804 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R805 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R806 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R807 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R808 | RMG, 1/16W, 100R, 1%, 0603 | 4723-101A+P | |
| R809 | RMG, 1/16W, 100R, 1%, 0603 | 4723-101A+P | |
| R814 | RMG, 1/10W, 100R, 1%, 0805 | 4720-101A+J | |
| R815 | RMG, 1/10W, 100R, 1%, 0805 | 4720-101A+J | |
| R816 | RMG, 1/10W, 100R, 1%, 0805 | 4720-101A+J | |
| R817 | RMG, 1/10W, 100R, 1%, 0805 | 4720-101A+J | |
| R820 | RMG, 1/10W, 100R, 1%, 0805 | 4720-101A+J | |
| R821 | RMG, 1/10W, 100R, 1%, 0805 | 4720-101A+J | |
| R822 | RMG, 1/10W, 100R, 1%, 0805 | 4720-101A+J | |
| R823 | RMG, 1/10W, 100R, 1%, 0805 | 4720-101A+J | |
| R824 | RMG, 1/10W, 100R, 1%, 0805 | 4720-101A+J | |
| R825 | RMG, 1/10W, 100R, 1%, 0805 | 4720-101A+J | |
| R842 | RMG, 1/16W, 15R, 5%, 0603 | 4723-150J+P-R | |
| R847 | RMG, 1/16W, 150R, 1%, 0603 | 4723-151A+P-R | |
| R848 | RMG, 1/16W, 150R, 1%, 0603 | 4723-151A+P-R | |
| R849 | RMG, 1/16W, 150R, 1%, 0603 | 4723-151A+P-R | |
| R850 | RMG, 1/16W, 150R, 1%, 0603 | 4723-151A+P-R | |
| R852 | RMG, 1/16W, 2.2K, 1%, 0603/1608 | 4723-222A+P | |
| R854 | RMG, 1/16W, 2.2K, 1%, 0603/1608 | 4723-222A+P | |
| R857 | RMG, 1/16W, 2K, 1%, 0603/1608 | 4723-202A+P | |
| R858 | RMG, 1/16W, 2K, 1%, 0603/1608 | 4723-202A+P | |
| R864 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A+P | |
| R868 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R869 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R870 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R871 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R882 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R883 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R884 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R885 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R887 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A+P | |

ELECTRICAL PART LIST

FreeSpace® IZA 2120-LZ Rear Panel PCB Assembly

Resistors (continued)

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---------------------------------|--------------------|------|
| R888 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A+P | |
| R889 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A+P | |
| R892 | RMG, 1/16W, 1.5K, 1%, 0603 | 4723-152A+P-R | |
| R893 | RMG, 1/16W, 2.7K, 1%, 0603/1608 | 4723-272A+P | |
| R894 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A+P | |
| R895 | RMG, 1/16W, 5.1K, 1%, 0603/1608 | 4723-512A+P | |

Capacitors

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|--|--------------------|------|
| C700 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C701 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C702 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C709 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C710 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C711 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C712 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C713 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C714 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C717 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C718 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C721 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C722 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C723 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C724 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C725 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C726 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C727 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C728 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C729 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102J+P-AC | |
| C730 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102J+P-AC | |
| C735 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102J+P-AC | |
| C739 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102J+P-AC | |
| C741 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101J+P-AC | |
| C743 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101J+P-AC | |
| C746 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102J+P-AC | |
| C747 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102J+P-AC | |
| C749 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102J+P-AC | |
| C750 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102J+P-AC | |
| C755 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101J+P-AC | |
| C757 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101J+P-AC | |
| C760 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102J+P-AC | |
| C761 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102J+P-AC | |
| C762 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102J+P-AC | |
| C765 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102J+P-AC | |
| C767 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102J+P-AC | |
| C768 | CC, 50V, 1000p, 5%, 0805, 1.25X2.0, MURATA | 150F-102J+J-BDM | |
| C769 | CC, 50V, 1000p, 5%, 0805, 1.25X2.0, MURATA | 150F-102J+J-BDM | |
| C771 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102J+P-AC | |
| C772 | CC, 50V, 22P, 5%, 0603, C0G | 150F-220J+P-AC | |
| C773 | CC, 50V, 22P, 5%, 0603, C0G | 150F-220J+P-AC | |
| C774 | CC, 50V, 0.01uF, 10%, 0603, X7R | 150F-103K+P-AC | |

ELECTRICAL PART LIST

FreeSpace® IZA 2120-LZ Rear Panel PCB Assembly

Capacitors (continued)

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---|--------------------|------|
| C775 | CC, 50V, 0.01uF, 10%, 0603, X7R | 150F-103K+P-AC | |
| C776 | CC, 50V, 0.01uF, 10%, 0603, X7R | 150F-103K+P-AC | |
| C777 | CC, 50V, 0.01uF, 10%, 0603, X7R | 150F-103K+P-AC | |
| C778 | CC, 50V, 0.01uF, 10%, 0603, X7R | 150F-103K+P-AC | |
| C779 | CC, 50V, 0.01uF, 10%, 0603, X7R | 150F-103K+P-AC | |
| C780 | CC, 50V, 0.01uF, 10%, 0603, X7R | 150F-103K+P-AC | |
| C785 | CC, 50V, 0.01uF, 10%, 0603, X7R | 150F-103K+P-AC | |
| C786 | CC, 50V, 0.01uF, 10%, 0603, X7R | 150F-103K+P-AC | |
| C787 | CC, 6.3V, 4.7U, 10%, 0603 | 150B-475K+P-AC | |
| C788 | CC, 100V, 0.1U, 10%, 1206, AVX | 150H-104K+6-CFD | |
| C789 | CC, 100V, 0.1U, 10%, 1206, AVX | 150H-104K+6-CFD | |
| C790 | CC, 100V, 0.1U, 10%, 1206, AVX | 150H-104K+6-CFD | |
| C795 | CE, 6.3V, 220U, 20%, SM, 6.3X5.3, NOVER | 157B-227M+3-LJU | |
| C796 | CE, 6.3V, 220U, 20%, SM, 6.3X5.3, NOVER | 157B-227M+3-LJU | |
| C797 | CE, 6.3V, 220U, 20%, SM, 6.3X5.3, NOVER | 157B-227M+3-LJU | |
| C798 | CE, 6.3V, 220U, 20%, SM, 6.3X5.3, NOVER | 157B-227M+3-LJU | |
| C800 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106M+3-EJ | |
| C802 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106M+3-EJ | |
| C804 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106M+3-EJ | |
| C805 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106M+3-EJ | |
| C810 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106M+3-EJ | |
| C814 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106M+3-EJ | |
| C815 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106M+3-EJ | |
| C816 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106M+3-EJ | |
| C817 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106M+3-EJ | |
| C818 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106M+3-EJ | |
| C821 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106M+3-EJ | |
| C822 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106M+3-EJ | |
| C823 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106M+3-EJ | |
| C824 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106M+3-EJ | |
| C825 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106M+3-EJ | |
| C826 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106M+3-EJ | |
| C827 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106M+3-EJ | |
| C828 | CE, 16V, 10U, 20%, SM, 3X5.4, 85C-2000H | 157D-106M+3-EJ | |
| C833 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101J+P-AC | |
| C834 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101J+P-AC | |
| C835 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102J+P-AC | |
| C836 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102J+P-AC | |
| C837 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C840 | CC, 50V, 470PF, 5%, 0603, C0G | 150F-471J+P-AC | |
| C841 | CC, 50V, 470PF, 5%, 0603, C0G | 150F-471J+P-AC | |
| C844 | CC, 50V, 0.01uF, 10%, 0603, X7R | 150F-103K+P-AC | |
| C845 | CC, 50V, 0.01uF, 10%, 0603, X7R | 150F-103K+P-AC | |
| C846 | CC, 50V, 0.01uF, 10%, 0603, X7R | 150F-103K+P-AC | |
| C847 | CC, 50V, 0.01uF, 10%, 0603, X7R | 150F-103K+P-AC | |
| C856 | CC, 50V, 0.01uF, 10%, 0603, X7R | 150F-103K+P-AC | |
| C860 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C861 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C862 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C863 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C864 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C865 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |

ELECTRICAL PART LIST

FreeSpace® IZA 2120-LZ Rear Panel PCB Assembly

Capacitors (continued)

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|--------------------------------|--------------------|------|
| C866 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C867 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C868 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C869 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C870 | CC, 50V, 0.01U, 5%, 0603 | 150F-103J+P-AC | |

Diodes

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---|--------------------|------|
| D704 | DIODE, BAV99, SOT23, PHILIPS | 4840-8970+3 | |
| D705 | DIODE, BAV99, SOT23, PHILIPS | 4840-8970+3 | |
| D706 | DIODE, BAV99, SOT23, PHILIPS | 4840-8970+3 | |
| D707 | DIODE, BAV99, SOT23, PHILIPS | 4840-8970+3 | |
| D710 | DIODE, BAV99, SOT23, PHILIPS | 4840-8970+3 | |
| D711 | DIODE, BAV99, SOT23, PHILIPS | 4840-8970+3 | |
| D712 | DIODE, BAV99, SOT23, PHILIPS | 4840-8970+3 | |
| D713 | DIODE, BAV99, SOT23, PHILIPS | 4840-8970+3 | |
| D714 | DIODE, BAV99, SOT23, PHILIPS | 4840-8970+3 | |
| D715 | DIODE, BAV99, SOT23, PHILIPS | 4840-8970+3 | |
| D716 | DOUBLE, DIODE, BAT54S, SOT-23, SCHOTTKY, SMD | 480T-54S0+3 | |
| Z700 | DZ, 1/2W, 6.2VB, SMD, LL-34, ROHM(RLZTE-116.2B) | 4837-6V21+3 | |
| Z701 | DZ, 1/2W, 6.2VB, SMD, LL-34, ROHM(RLZTE-116.2B) | 4837-6V21+3 | |

Transistors

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---|--------------------|------|
| Q708 | TR, MMBT4403LT1G, SMD | 4854-4030+3 | |
| Q709 | TR, MMBT4403LT1G, SMD | 4854-4030+3 | |
| Q710 | TR, MMBT4403LT1G, SMD | 4854-4030+3 | |
| Q711 | TR, MMBT4403LT1G, SMD | 4854-4030+3 | |
| Q712 | TR, MMBT4403LT1G, SMD | 4854-4030+3 | |
| Q713 | TR, MMBT4403LT1G, SMD | 4854-4030+3 | |
| Q714 | TR, MMBT4403LT1G, SMD | 4854-4030+3 | |
| Q715 | TR, MMBT4403LT1G, SMD | 4854-4030+3 | |
| Q718 | TR, NPN, MMBT4401, SOT-23, HFE:20-300, SM | 4854-4010+3 | |
| Q719 | TR, NPN, MMBT4401, SOT-23, HFE:20-300, SM | 4854-4010+3 | |
| Q720 | TR, NPN, MMBT4401, SOT-23, HFE:20-300, SM | 4854-4010+3 | |

Integrated Circuits

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|--|--------------------|------|
| U701 | IC, NJM2068M-#ZZZB, DUAL, OP, AMP | 3130-6890+0 | |
| U702 | IC, OP, AMP, SWITCH, NJM2120M, SOIC8, JRC | 3132-3711+0 | |
| U703 | IC, OP, AMP, SWITCH, NJM2120M, SOIC8, JRC | 3132-3711+0 | |
| U706 | IC, TL072CDR, DUAL J-FET, INPUT, OP-AMP, (SMD) | 3130-8020+0 | |
| U708 | IC, TL072CDR, DUAL J-FET, INPUT, OP-AMP, (SMD) | 3130-8020+0 | |
| U709 | IC, TL072CDR, DUAL J-FET, INPUT, OP-AMP, (SMD) | 3130-8020+0 | |

ELECTRICAL PART LIST

FreeSpace® IZA 2120-LZ Rear Panel PCB Assembly

Miscellaneous

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|--|--------------------|------|
| J701 | SOCKET, M, 2P, P5, 300V, 15A, BLACK | 2113-3361+1 | |
| J702 | RCA, JACK, F, 2P, P15, 30V, 0.3A, H=10+9.5, R/W | 2113-3153+2 | |
| J703 | RCA, JACK, F, 2P, P15, 30V, 0.3A, H=10+9.5, R/W | 2113-3153+2 | |
| J704 | RCA, JACK, F, 2P, P15, 30V, 0.3A, H=10+9.5, R/W | 2113-3153+2 | |
| J705 | SOCKET, EURO, BLOCK, 4P, P5, STRAIGHT, GREEN | 2113-3148+0 | |
| J707 | SOCKET, SPEAKER, 4P, P5, 250V, 12A, BLACK | 2113-3148+1 | |
| J711B | CONNECTOR, PIN, HEADER, 4P, P2.54, ST, F | 2101-3294+0 | |
| J712 | SOCKET, M, 5P, P5, 250V, 12A, GRN, ST | 2113-3421+0 | |
| J713 | SOCKET, M, 5P, P5, 250V, 12A, GRN, ST | 2113-3421+0 | |
| J717 | CONN, HEADER, 12P, P2.54, DIP, ST, M, L=8.54 | 2101-3410+0 | |
| J718 | CONN, HEADER, 12P, P2.54, DIP, ST, M, L=8.54 | 2101-3410+0 | |
| SW700 | SW, SLIDE, 1P5T, DC50V, 0.5A | 5200-5085+0 | |
| VR700 | VR, ROTARY, 100KAX2, 20%, V, L=15, 18TEETH, 90C, CTR | 4751-225E+1 | |
| VR701 | VR, ROTARY, 100KAX2, 20%, V, L=15, 18TEETH, 90C, CTR | 4751-225E+1 | |
| VR702 | VR, ROTARY, 10K/10CX1, 20%, V, L=15, 18TEETH, CTR | 4751-224E+0 | |
| VR704 | VR, ROTARY, 10K/10CX1, 20%, V, L=15, 18TEETH, CTR | 4751-224E+0 | |
| VR705 | VR, ROTARY, 20BKX1, 20%, V, L=15, 18TEETH, CTR | 4751-226E+0 | |
| VR706 | VR, ROTARY, 20BKX1, 20%, V, L=15, 18TEETH, CTR | 4751-226E+0 | |

ELECTRICAL PART LIST

FreeSpace® ZA 2120-LZ Rear Panel PCB Assembly

Resistors

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---------------------------------|--------------------|------|
| R402 | RMG, 1/16W, 4.7K, 1%, 0603/1608 | 4723-472A+P | |
| R403 | RMF, 1/4W, 2R2, 1%, 1206 | 4715-2R2A+6 | |
| R404 | RMG, 1/16W, 8.2K, 1%, 0603/1608 | 4723-822A+P | |
| R405 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A+P | |
| R406 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A+P | |
| R407 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A+P | |
| R408 | RMG, 1/16W, 470R, 1%, 0603 | 4723-471A+P-R | |
| R409 | RMG, 1/16W, 470R, 1%, 0603 | 4723-471A+P-R | |
| R410 | RMG, 1/16W, 820R, 1%, 0603 | 4723-821A+P-R | |
| R411 | RMG, 1/16W, 470R, 1%, 0603 | 4723-471A+P-R | |
| R412 | RMG, 1/16W, 470R, 1%, 0603 | 4723-471A+P-R | |
| R413 | RMG, 1/16W, 220R, 1%, 0603/1608 | 4723-221A+P | |
| R414 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A+P | |
| R415 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A+P | |
| R416 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A+P | |
| R417 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A+P | |
| R418 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A+P | |
| R419 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A+P | |
| R420 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A+P | |
| R421 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A+P | |
| R422 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A+P | |
| R423 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A+P | |
| R424 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A+P | |
| R425 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A+P | |
| R428 | RMG, 1/16W, 22K, 1%, 0603 | 4723-223A+P-R | |
| R429 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R430 | RMF, 1/4W, 2R2, 1%, 1206 | 4715-2R2A+6 | |
| R431 | RMG, 1/16W, 5.1K, 5% | 4723-512J+P | |
| R432 | RMG, 1/16W, 5.1K, 5% | 4723-512J+P | |
| R433 | RMG, 1/16W, 5.1K, 5% | 4723-512J+P | |
| R436 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R437 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R438 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R441 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R442 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R443 | RMG, 1/16W, 220R, 1%, 0603/1608 | 4723-222A+P | |
| R444 | RMG, 1/16W, 220R, 1%, 0603/1608 | 4723-222A+P | |
| R446 | RMG, 1/16W, 5.6K, 1%, 0603/1608 | 4723-562A+P | |
| R448 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A+P | |
| R700 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A+P | |
| R701 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A+P | |
| R702 | RMG, 1/16W, 4.7K, 1%, 0603/1608 | 4723-472A+P | |
| R703 | RMG, 1/16W, 4.7K, 1%, 0603/1608 | 4723-472A+P | |
| R704 | RMG, 1/16W, 3.3K, 1%, 0603 | 4723-332A+P-R | |
| R705 | RMG, 1/10W, 4.7M, 1%, 0603 | 4720-475A+P | |
| R706 | RMG, 1/10W, 4.7M, 1%, 0603 | 4720-475A+P | |
| R707 | RMG, 1/16W, 4.7K, 1%, 0603/1608 | 4723-472A+P | |
| R708 | RMG, 1/16W, 4.7K, 1%, 0603/1608 | 4723-472A+P | |
| R709 | RMG, 1/16W, 270R, 1%, 0603 | 4723-271A+P-R | |
| R710 | RMG, 1/16W, 270R, 1%, 0603 | 4723-271A+P-R | |
| R711 | RMG, 1/16W, 270R, 1%, 0603 | 4723-271A+P-R | |
| R712 | RMG, 1/16W, 270R, 1%, 0603 | 4723-271A+P-R | |

ELECTRICAL PART LIST

FreeSpace® ZA 2120-LZ Rear Panel PCB Assembly

Resistors (continued)

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---------------------------------|--------------------|------|
| R713 | RMG, 1/16W, 47K, 1%, 0603 | 4723-473A+P-R | |
| R714 | RMG, 1/16W, 47K, 1%, 0603 | 4723-473A+P-R | |
| R715 | RMG, 1/16W, 47K, 1%, 0603 | 4723-473A+P-R | |
| R716 | RMG, 1/16W, 47K, 1%, 0603 | 4723-473A+P-R | |
| R717 | RMG, 1/16W, 47K, 1%, 0603 | 4723-473A+P-R | |
| R718 | RMG, 1/16W, 47K, 1%, 0603 | 4723-473A+P-R | |
| R719 | RMG, 1/16W, 47K, 1%, 0603 | 4723-473A+P-R | |
| R720 | RMG, 1/16W, 47K, 1%, 0603 | 4723-473A+P-R | |
| R721 | RMG, 1/16W, 470R, 1%, 0603 | 4723-471A+P-R | |
| R722 | RMG, 1/16W, 470R, 1%, 0603 | 4723-471A+P-R | |
| R723 | RMG, 1/16W, 470R, 1%, 0603 | 4723-471A+P-R | |
| R724 | RMG, 1/16W, 470R, 1%, 0603 | 4723-471A+P-R | |
| R725 | RMG, 1/16W, 5.6K, 1%, 0603/1608 | 4723-564A+P | |
| R726 | RMG, 1/16W, 5.6K, 1%, 0603/1608 | 4723-564A+P | |
| R727 | RMG, 1/16W, 47K, 1%, 0603 | 4723-473A+P-R | |
| R728 | RMG, 1/16W, 47K, 1%, 0603 | 4723-473A+P-R | |
| R729 | RMG, 1/16W, 200K, 1%, 0603/1608 | 4723-204A+P | |
| R730 | RMG, 1/16W, 200K, 1%, 0603/1608 | 4723-204A+P | |
| R731 | RMG, 1/16W, 82K, 5%, 0603/1608 | 4723-823J+P | |
| R732 | RMG, 1/10W, 39K, 1%, 0603 | 4720-393A+P | |
| R733 | RMG, 1/16W, 82K, 5%, 0603/1608 | 4723-823J+P | |
| R734 | RMG, 1/10W, 39K, 1%, 0603 | 4720-393A+P | |
| R737 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A+P | |
| R738 | RMG, 1/16W, 0R, 1%, 0603 | 4723-000A+P | |
| R739 | RMG, 1/16W, 100R, 1%, 0603 | 4723-101A+P | |
| R740 | RMG, 1/16W, 100R, 1%, 0603 | 4723-101A+P | |
| R741 | RMG, 1/16W, 100R, 1%, 0603 | 4723-101A+P | |
| R742 | RMG, 1/16W, 100R, 1%, 0603 | 4723-101A+P | |
| R743 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A+P | |
| R744 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A+P | |
| R745 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A+P | |
| R746 | RMG, 1/16W, 1K, 1%, 0603/1608 | 4723-102A+P | |
| R747 | RMG, 1/16W, 36K, 1%, 0603 | 4723-363A+P | |
| R748 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R749 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R751 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R752 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R753 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R754 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R755 | RMG, 1/16W, 36K, 1%, 0603 | 4723-363A+P | |
| R756 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R757 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R758 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R759 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R762 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R765 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R767 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R768 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R769 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R771 | RMG, 1/16W, 100R, 1%, 0603 | 4723-101A+P | |
| R772 | RMG, 1/16W, 100R, 1%, 0603 | 4723-101A+P | |
| R773 | RMG, 1/16W, 100R, 1%, 0603 | 4723-101A+P | |

ELECTRICAL PART LIST

FreeSpace® ZA 2120-LZ Rear Panel PCB Assembly

Resistors (continued)

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---------------------------------|--------------------|------|
| R774 | RMG, 1/16W, 100R, 1%, 0603 | 4723-101A+P | |
| R776 | RMG, 1/16W, 100K, 1%, 0603 | 4723-104A+P-R | |
| R777 | RMG, 1/16W, 100K, 1%, 0603 | 4723-104A+P-R | |
| R778 | RMG, 1/16W, 20K, 1%, 0603/1608 | 4723-203A+P | |
| R779 | RMG, 1/16W, 20K, 1%, 0603/1608 | 4723-203A+P | |
| R780 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R781 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R782 | RMG, 1/16W, 200K, 1%, 0603/1608 | 4723-204A+P | |
| R783 | RMG, 1/16W, 200K, 1%, 0603/1608 | 4723-204A+P | |
| R786 | RMG, 1/16W, 270K, 1%, 0603 | 4723-274A+P | |
| R787 | RMG, 1/16W, 270K, 1%, 0603 | 4723-274A+P | |
| R788 | RMG, 1/16W, 3.9K, 1%, 0603/1608 | 4723-392A+P | |
| R789 | RMG, 1/16W, 3.9K, 1%, 0603/1608 | 4723-392A+P | |
| R790 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R791 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R792 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R793 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R794 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R795 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R796 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R797 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R798 | RMG, 1/16W, 100R, 1%, 0603 | 4723-101A+P | |
| R799 | RMG, 1/16W, 100R, 1%, 0603 | 4723-101A+P | |
| R804 | RMG, 1/16W, 100K, 1%, 0603 | 4723-104A+P-R | |
| R805 | RMG, 1/16W, 100K, 1%, 0603 | 4723-104A+P-R | |
| R806 | RMG, 1/16W, 100K, 1%, 0603 | 4723-104A+P-R | |
| R807 | RMG, 1/16W, 100K, 1%, 0603 | 4723-104A+P-R | |
| R808 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R809 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R810 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |
| R811 | RMG, 1/16W, 10K, 1%, 0603 | 4723-103A+P-R | |

Capacitors

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|--|--------------------|------|
| C402 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C404 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C406 | CT, 16V, 10U, 20%, SMD, 1.6X3.2 | 154D-106M+3-CF | |
| C408 | CC, 50V, 0.01U, 5%, 0603 | 150F-103J+P-AC | |
| C409 | CE, 25V, 10U, 20%, 5.3X5.4, SMD, UWX1E100MCR1GB, NCC | 157E-106M+3-JJC | |
| C411 | CE, 25V, 10U, 20%, 5.3X5.4, SMD, UWX1E100MCR1GB, NCC | 157E-106M+3-JJC | |
| C414 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C415 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C417 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C419 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C420 | CE, 25V, 100UF, 20%, 6.3X7.7, SMD | 157E-107M+3-LO | |
| C421 | CE, 25V, 100UF, 20%, 6.3X7.7, SMD | 157E-107M+3-LO | |
| C425 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C426 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C427 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |

ELECTRICAL PART LIST

FreeSpace® ZA 2120-LZ Rear Panel PCB Assembly

Capacitors (continued)

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---------------------------------|--------------------|------|
| C430 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102J+P-AC | |
| C431 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102J+P-AC | |
| C432 | CC, 100V, 0.1U, 10%, 1206, AVX | 150H-104K+6-CFD | |
| C433 | CC, 100V, 0.1U, 10%, 1206, AVX | 150H-104K+6-CFD | |
| C434 | CT, 16V, 10U, 20%, SMD, 1.6X3.2 | 154D-106M+3-CF | |
| C435 | CC, 50V, 0.01U, 5%, 0603 | 150F-103J+P-AC | |
| C439 | CC, 100V, 0.1U, 10%, 1206, AVX | 150H-104K+6-CFD | |
| C440 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C700 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101J+P-AC | |
| C701 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101J+P-AC | |
| C702 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C703 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C704 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C705 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C706 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C707 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101J+P-AC | |
| C708 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101J+P-AC | |
| C709 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C710 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C711 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C712 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C713 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C714 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C715 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C716 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C717 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C718 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101J+P-AC | |
| C719 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101J+P-AC | |
| C720 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101J+P-AC | |
| C721 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101J+P-AC | |
| C722 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C723 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101J+P-AC | |
| C724 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101J+P-AC | |
| C725 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101J+P-AC | |
| C726 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101J+P-AC | |
| C727 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C728 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102J+P-AC | |
| C729 | CC, 50V, 1000P, 5%, 0603, X7R | 150F-102J+P-AC | |
| C730 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101J+P-AC | |
| C731 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C732 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C733 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C734 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C735 | CC, 50V, 0.01U, 5%, 0603 | 150F-103J+P-AC | |
| C736 | CC, 50V, 0.01U, 5%, 0603 | 150F-103J+P-AC | |
| C739 | CT, 16V, 10U, 20%, SMD, 1.6X3.2 | 154D-106M+3-CF | |
| C740 | CT, 16V, 10U, 20%, SMD, 1.6X3.2 | 154D-106M+3-CF | |
| C741 | CT, 16V, 10U, 20%, SMD, 1.6X3.2 | 154D-106M+3-CF | |
| C742 | CT, 16V, 10U, 20%, SMD, 1.6X3.2 | 154D-106M+3-CF | |
| C743 | CT, 16V, 10U, 20%, SMD, 1.6X3.2 | 154D-106M+3-CF | |
| C744 | CT, 16V, 10U, 20%, SMD, 1.6X3.2 | 154D-106M+3-CF | |
| C745 | CC, 50V, 1U, 10%, 0805 | 150F-105K+J-BD | |

ELECTRICAL PART LIST

FreeSpace® ZA 2120-LZ Rear Panel PCB Assembly

Capacitors (continued)

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---------------------------------|--------------------|------|
| C746 | CC, 50V, 1U, 10%, 0805 | 150F-105K+J-BD | |
| C747 | CC, 50V, 1U, 10%, 0805 | 150F-105K+J-BD | |
| C748 | CC, 50V, 1U, 10%, 0805 | 150F-105K+J-BD | |
| C750 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101J+P-AC | |
| C751 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101J+P-AC | |
| C752 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101J+P-AC | |
| C753 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101J+P-AC | |
| C754 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101J+P-AC | |
| C755 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101J+P-AC | |
| C756 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101J+P-AC | |
| C757 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101J+P-AC | |
| C758 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C759 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C760 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C761 | CC, 50V, 0.1uF, 10%, 0603, X7R | 150F-104K+P-AC | |
| C764 | CT, 16V, 10U, 20%, SMD, 1.6X3.2 | 154D-106M+3-CF | |
| C765 | CT, 16V, 10U, 20%, SMD, 1.6X3.2 | 154D-106M+3-CF | |
| C766 | CT, 16V, 10U, 20%, SMD, 1.6X3.2 | 154D-106M+3-CF | |
| C767 | CT, 16V, 10U, 20%, SMD, 1.6X3.2 | 154D-106M+3-CF | |
| C768 | CT, 16V, 10U, 20%, SMD, 1.6X3.2 | 154D-106M+3-CF | |
| C769 | CT, 16V, 10U, 20%, SMD, 1.6X3.2 | 154D-106M+3-CF | |
| C770 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101J+P-AC | |
| C771 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101J+P-AC | |
| C772 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101J+P-AC | |
| C773 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101J+P-AC | |
| C774 | CT, 16V, 10U, 20%, SMD, 1.6X3.2 | 154D-106M+3-CF | |
| C775 | CT, 16V, 10U, 20%, SMD, 1.6X3.2 | 154D-106M+3-CF | |
| C782 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101J+P-AC | |
| C783 | CC, 50V, 100PF, 5%, 0603, C0G | 150F-101J+P-AC | |
| C784 | CC, 50V, 470PF, 5%, 0603, C0G | 150F-471J+P-AC | |
| C785 | CC, 50V, 470PF, 5%, 0603, C0G | 150F-471J+P-AC | |

Inductors

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---|--------------------|------|
| L402 | FERRITE, BEAD, CHIP, SEBW201209U121MT, 0805 | 1808-0872+0 | |

Diodes

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|--|--------------------|------|
| D402 | DIODE, FAST, 75V, 0.5A, BAS316, SOD323, SM | 480S-3160+3 | |
| D403 | DIODE, FAST, 75V, 0.5A, BAS316, SOD323, SM | 480S-3160+3 | |
| D404 | DIODE, FAST, 75V, 0.5A, BAS316, SOD323, SM | 480S-3160+3 | |
| D405 | DIODE, FAST, 75V, 0.5A, BAS316, SOD323, SM | 480S-3160+3 | |
| D706 | DIODE, 1SS355TE-17, ROHM | 4840-1660+0 | |
| D707 | DIODE, 1SS355TE-17, ROHM | 4840-1660+0 | |
| D708 | DIODE, 1SS355TE-17, ROHM | 4840-1660+0 | |
| D709 | DIODE, 1SS355TE-17, ROHM | 4840-1660+0 | |
| D710 | DIODE, 1SS355TE-17, ROHM | 4840-1660+0 | |
| D711 | DIODE, 1SS355TE-17, ROHM | 4840-1660+0 | |
| D712 | DIODE, 1SS355TE-17, ROHM | 4840-1660+0 | |

ELECTRICAL PART LIST

FreeSpace® ZA 2120-LZ Rear Panel PCB Assembly

Diodes (continued)

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|--|--------------------|------|
| D713 | DIODE, 1SS355TE-17, ROHM | 4840-1660+0 | |
| D714 | DIODE, 1SS355TE-17, ROHM | 4840-1660+0 | |
| D715 | DIODE, 1SS355TE-17, ROHM | 4840-1660+0 | |
| D716 | DIODE, BAV99, SOT23 | 4840-8970+3 | |
| D717 | DIODE, BAV99, SOT23 | 4840-8970+3 | |
| D718 | DIODE, BAV99, SOT23 | 4840-8970+3 | |
| D719 | DIODE, BAV99, SOT23 | 4840-8970+3 | |
| Z402 | DZ, 1/2W, 6.2VB, SMD, LL-34, ROHM (RLZTE-116.2B) | 4837-6V21+3 | |
| Z403 | DZ, 1/2W, 6.2VB, SMD, LL-34, ROHM(RLZTE-116.2B) | 4837-6V21+3 | |
| Z700 | DZ, 1/2W, 5V1, MMSZ5231B, SOD-123, SMD, PANJIT | 4837-5V18+3 | |
| Z701 | DZ, 1/2W, 5V1, MMSZ5231B, SOD-123, SMD, PANJIT | 4837-5V18+3 | |

Integrated Circuits

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---|--------------------|------|
| U400 | IC, ASIC, SN74LVC2G17, DCK | 3132-7450+0 | |
| U401 | IC, REGULATOR, NJM7805DLA, TO-252 | 3132-7310+0 | |
| U402 | IC, MCU, S3F94C4, SOP20, SAMSUNG | 3132-9660+0-13 | |
| U403 | IC, NJM79M05DL1A-T-#ZZ, ZB, REGULATOR | 3132-3012+0 | |
| U404 | IC, CD74HC4051M96, SOIC | 3132-0780+0 | |
| U405 | IC, REGULATOR, +15V, 7815, DPAK/TO-252, AUK | 3132-8161+0-49 | |
| U406 | IC, REGULATOR, -15V, 7915, DPAK/TO-252, AUK | 3132-8171+0-49 | |
| U700 | IC, LM358AM, OPAMP, SO-8 | 3132-2501+0 | |
| U701 | IC, LM358AM, OPAMP, SO-8 | 3132-2501+0 | |
| U702 | IC, TL072CDR, DUAL, J-FET, INPUT, OP-AMP, (SMD) | 3130-8020+0 | |
| U703 | IC, TL072CDR, DUAL, J-FET, INPUT, OP-AMP, (SMD) | 3130-8020+0 | |
| U704 | IC, TL072CDR, DUAL, J-FET, INPUT, OP-AMP, (SMD) | 3130-8020+0 | |
| U705 | IC, TL072CDR, DUAL, J-FET, INPUT, OP-AMP, (SMD) | 3130-8020+0 | |
| U706 | IC, TL072CDR, DUAL, J-FET, INPUT, OP-AMP, (SMD) | 3130-8020+0 | |
| U707 | IC, TL072CDR, DUAL, J-FET, INPUT, OP-AMP, (SMD) | 3130-8020+0 | |
| U708 | IC, TL072CDR, DUAL, J-FET, INPUT, OP-AMP, (SMD) | 3130-8020+0 | |
| U709 | IC, TL072CDR, DUAL, J-FET, INPUT, OP-AMP, (SMD) | 3130-8020+0 | |
| U710 | IC, LM13700M/NOPB, TRANSCONDUCTANCE, AMP | 3132-1981+0 | |
| U711 | IC, TL072CDR, DUAL, J-FET, INPUT, OP-AMP, (SMD) | 3130-8020+0 | |
| U712 | IC, 2CH, VOLUME, BD3812F, SOP14 | 3132-6071+0 | |

ELECTRICAL PART LIST

FreeSpace® ZA 2120-LZ Rear Panel PCB Assembly

Miscellaneous

| Reference Designator | Description | Vendor Part Number | Note |
|----------------------|---|--------------------|------|
| J401 | 5P, ST., WAFER, P=2.0, COULOMB | 2102-050S+003 | |
| J402 | WIRE-CONN, 6P, P2.0, #28, UL1007, L=480, RD/WH, F/M | 7013-4530+0 | |
| J403 | WIRE-CONN, 4P, P2.0, #28, UL1007, L=320, RD/WH, F/M | 7013-4541+0 | |
| J404 | WIRE-CONN, 7P, P2.0, #28, UL1007, L=140, RD/WH, F/M | 7013-4520+0 | |
| J405 | SOCKET, M, 2P, P5, 300V, 15A, BLACK | 2113-3361+1 | |
| J407 | SOCKET, M, 2P, P5, 300V, 15A, BLACK | 2113-3361+1 | |
| J700 | RCA, JACK, F, 2P, P15, 30V, 0.3A, H=10+9.5, R/W | 2113-3153+2 | |
| J701 | CONN, FFC, 10P, P0.5, SMT, ST | 2101-3375+1 | |
| J702 | SOCKET, M, 5P, P5, 250V, 12A, GRN, ST | 2113-3421+0 | |
| SW400 | SWITCH, SLIDE, DPDT, 50V, 0.5A, L=7 | 5200-5012+0 | |
| SW700 | SWITCH, SLIDE, DPDT, 50V, 0.5A, L=7 | 5200-5012+0 | |
| VR400 | VR, ROTARY, 20BKX1, 20%, V, L=15, 18TEETH, CTR | 4751-226E+0 | |
| VR401 | VR, ROTARY, 20BKX1, 20%, V, L=15, 18TEETH, CTR | 4751-226E+0 | |

DISASSEMBLY PROCEDURES

Note: The IZA 2120-HZ, IZA 2120-LZ, ZA 2120-HZ and ZA 2120-LZ all share a similar design. As a result, the disassembly procedures are similar for all four models. Any differences in disassembly are detailed in the following procedures. Unless otherwise stated, these procedures are common across all four models. Refer to the chassis views at right for board locations.

1. Top Cover Removal

1.1 Remove the 10 screws that secure the top cover. Lift off the top cover.

 **CAUTION:** Ensure that the insulating sheet is properly installed on the top cover over the SMPS PCB. This is to prevent arcing to the top cover from the high voltage section of the SMPS.

2. SMPS PCB Removal

2.1 Perform procedure 1.

2.2 Disconnect the wiring harnesses at J201, J202, J203 and J204.

2.3 Remove the six screws that secure the PCB assembly to the chassis. Lift out the PCB assembly.

 **CAUTION:** Ensure that the insulating sheet is properly installed in the chassis under the SMPS PCB. This is to prevent arcing to the chassis from the high voltage section of the SMPS.

3. Amplifier PCB Removal

3.1 Perform procedure 1.

3.2 Disconnect the ribbon cable at J5. Disconnect the wiring harnesses at J1, J2 and J3.

3.3 Remove the five screws that secure the PCB assembly to the chassis.


Note: There is one screw located in the middle of the heatsink.




IZA 2120-HZ Chassis View



ZA 2120-HZ Chassis View

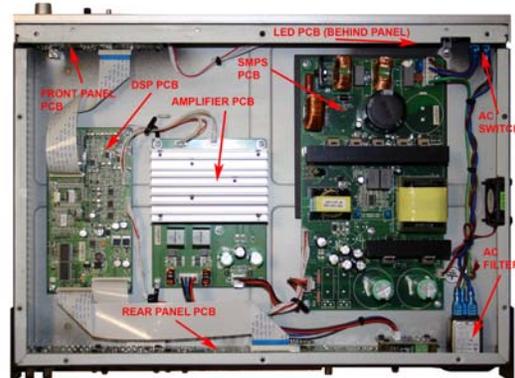

IZA 2120-LZ Chassis View

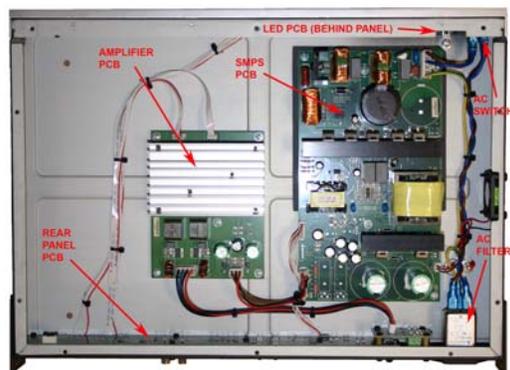

ZA 2120-LZ Chassis View

DISASSEMBLY PROCEDURES

4. DSP PCB Removal

(IZA 2120-HZ and IZA 2120-LZ units only)

4.1 Perform procedure 1.

4.2 Unplug the ribbon cables at J400, J401, J405 and J406. Disconnect the wiring harnesses at J403 and J404.

4.3 Remove the four screws that secure the PCB assembly to the chassis. Lift out the PCB assembly.

5. LED PCB Removal

5.1 Perform procedures 1 and 2.

5.2 Remove the four screws that secure the PCB assembly to the front panel. Remove the one ground screw to the chassis. Lift out the PCB assembly.

5.3 Unplug the wiring harness at J950.

6. Front Panel Removal

6.1 Perform procedure 1.

6.2 Make a note of the wiring configuration, and disconnect the four Faston connectors on the back of the AC switch.

6.3 Remove the four screws located on the sides of the plastic front panel that secure it to outside of the chassis.

Note: You may need to remove the front rack ears to access these screws. If so, remove the three rack ear screws and lift off the rack ear.

6.4 Remove the LED PCB using procedure 5.

6.5 Release the front panel retaining tabs that are located inside the chassis. Slide off the front panel.

7. Front Panel PCB Removal

(IZA 2120-HZ and IZA 2120-LZ units only)

7.1 Perform procedures 1, 2 and 4.

7.2 Unplug the ribbon cable at J902.

7.3 Remove the plastic front panel using procedure 6.

7.4 Remove the front panel knob. Using a 10mm nut driver, remove the hex nut and washer that secure the Master Level potentiometer to the plastic front panel.

7.5 Remove the six screws that secure the PCB assembly to the front panel. Remove the one ground screw to the chassis. Lift off the PCB assembly.

8A. Rear Panel PCB Assembly Removal

(IZA 2120-HZ and IZA 2120-LZ units only)

8.1A Perform procedure 1.

8.2A Unplug the ribbon cables at J716 and J700. Disconnect the wiring harness at J3 on the amplifier PCB assembly.

8.3A Remove the eleven screws that secure the rear panel jacks to the chassis. Lift out the PCB assembly.

IMPORTANT NOTE: Do not remove the screws located on the inside of the chassis that are on the PCB assembly itself. These screws are mounted to standoffs used to keep the board at the proper spacing from the chassis.

8B. Rear Panel PCB Assembly Removal

(ZA 2120-HZ and ZA 2120-LZ units only)

8.1B Perform procedure 1.

8.2B Disconnect the wiring harness at J201 on the SMPS PCB assembly. Disconnect the wiring harnesses at J1, J3 and J5 on the amplifier PCB assembly. Disconnect the wiring harness at J950 on the LED PCB.

DISASSEMBLY PROCEDURES

8.3B Remove the ten screws that secure the rear panel jacks to the chassis. Lift out the PCB assembly.

IMPORTANT NOTE: Do not remove the screws located on the inside of the chassis that are on the PCB assembly itself. These screws are mounted to standoffs used to keep the board at the proper spacing from the chassis.

9. AC Switch Removal

9.1 Perform procedure 1.

9.2 Make a note of the wiring, and disconnect the four Faston connections from the AC wiring harness.

9.3 Press in the plastic tabs located on the sides of the switch, and slide the switch out through the front panel.

10. AC IEC Filter Removal

10.1 Perform procedure 1.

10.2 Make a note of the wiring configuration and disconnect the three Faston connectors located on the back of the filter.

10.3 Remove the two screws that secure the filter to the chassis. Lift out the filter.

11. Fan Removal

11.1 Perform procedure 1.

11.2 Unplug the fan wiring harness from the SMPS PCB at J204.

11.3 Remove the four screws that secure the fan to the chassis. Lift out the fan.

Re-assembly Note: Be sure to mount the replacement fan for correct air flow. The label on the fan should face the inside of the chassis.

TEST PROCEDURES


IZA 2120-LZ Amplifier Tests

Required Equipment:

- Audio Precision ATS-1 or equivalent
- Audio Precision AUX-0025 digital filter or equivalent
- Remote Volume control with A/B Select User Interface (Bose® PC 041967)
- 2- 4 ohm, 250 Watt load resistors

Test Setup:

- Bass and Treble control, set at 12:00 o'clock position.
- Set EQ to "1" FLAT.
- Load 4 ohms per channel.
- Output gain trim set to max, master volume set to max.
- Rear panel input gain trim set to max.
- DIP switch setting: as shown at right.
- All measurements for power amp need to use the AUX-0025 digital filter.

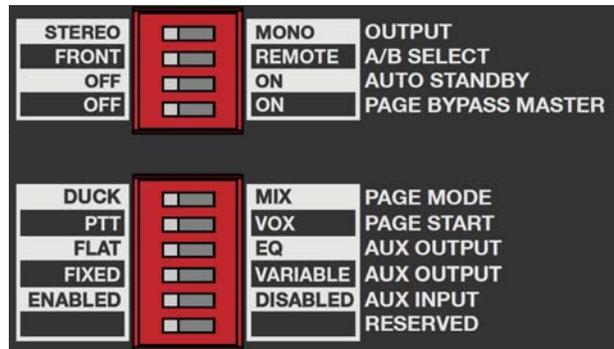

1. Input Sensitivity and THD+N Tests

- 1.1 Set the front panel Input A / Input B switch to Input A. Apply a -10dBV +/- 2dBV, 1kHz sine wave to the input A RCA input jacks.
- 1.2 Verify that the output level is 120W from both channels and that the THD+N is $\leq 0.5\%$.
- 1.3 Repeat steps 1.1 and 1.2 for the Input B RCA jacks.
- 1.4 Set the front panel Input A / Input B switch to Input A. Apply a -10dBV +/- 2dBV, 1kHz sine wave to the input A Euro block input jacks.
- 1.5 Verify that the output level is 120W from both channels. Verify that the THD+N is $\leq 0.5\%$.
- 1.6 Repeat steps 1.4 and 1.5 for the Input B Euro block input jacks.
- 1.7 Apply a -58dBV +/- 3dBV, 1kHz sine wave to the Page Input.
- 1.8 Verify that the output level is 120W from both channels and that the THD+N is $\leq 0.5\%$.
- 1.9 Apply a -5dBV +/- 2dBV, 1kHz sine wave to the 1/8" Aux input jack on the front panel.
- 1.10 Verify that the output level is 120W from both channels and that the THD+N is $\leq 0.5\%$.

2. Frequency Response and Output Noise Tests

- 2.1 Set the front panel Input A / Input B switch to Input A. Apply a -30dBV, 1kHz sine wave to the input A RCA jacks. Adjust the Input A gain rear panel control to allow a 1W output level. Reference the dB meter to this output level.

TEST PROCEDURES

- 2.2** Change the input frequency to 40Hz. Verify that the output level is -1dB_r +/- 1.
- 2.3** Change the input frequency to 18kHz. Verify that the output level is -1dB_r +/- 1.
- 2.4** Turn off the signal generator output. Measure the noise level with a 20kHz filter and A-weighting. Verify that it is ≤ 65 dBV.
- 2.5** Repeat steps 2.1 to 2.4 for Input B.
- 2.6** Set the front panel Input A / Input B switch to Input A. Apply a -30dBV, 1kHz sine wave to the input A Euro block jacks. Adjust the Input A gain rear panel control to allow a 1W output level. Reference the dB meter to this output level.
- 2.7** Change the input frequency to 40Hz. Verify that the output level is -1dB_r +/- 1.
- 2.8** Change the input frequency to 18kHz. Verify that the output level is -1dB_r +/- 1.
- 2.9** Turn off the signal generator output. Measure the noise level with a 20kHz filter and A-weighting. Verify that it is ≤ 65 dBV.
- 2.10** Repeat steps 2.6 to 2.9 for Input B.
- 2.11** Apply a -30dBV, 1kHz sine wave to the Page Input jack. Adjust the Page Input gain rear panel control to allow a 1W output level. Reference the dB meter to this output level.
- 2.12** Change the input frequency to 40Hz. Verify that the output level is -3dB_r +/- 1.
- 2.13** Change the input frequency to 18kHz. Verify that the output level is -3dB_r +/- 1.
- 2.14** Turn off the signal generator output. Measure the noise level with a 20kHz filter and A-weighting. Verify that it is ≤ 60 dBV.
- 2.15** Apply a -30dBV, 1kHz sine wave to the Aux Input jack located on the front panel. Reference the dB meter to this output level.
- 2.16** Change the input frequency to 40Hz. Verify that the output level is -1dB_r +/- 1.
- 2.17** Change the input frequency to 18kHz. Verify that the output level is -1dB_r +/- 1.
- 2.18** Turn off the signal generator output. Measure the noise level with a 20kHz filter and A-weighting. Verify that it is ≤ 65 dBV.

3. Tone Control Frequency Response Tests

- 3.1** Set the front panel Treble and Bass controls to the 12 o'clock position. Set the front panel Input A / Input B switch to Input A.
- 3.2** Apply a -30dBV, 7kHz sine wave to the input A RCA jacks. Adjust the Input A gain rear panel control to allow a 1W output level. Reference the dB meter to this output level.

TEST PROCEDURES

3.3 Rotate the Treble control fully CCW (counter-clockwise). Verify that the output level is -5 dBr, +/- 1.5.

3.4 Rotate the Treble control fully CW (clockwise). Verify that the output level is +5dBr, +/- 1.5dBr.

3.5 Apply a -30dBV, 100Hz sine wave to the input A RCA jacks. Adjust the Input A gain rear panel control to allow a 1W output level. Reference the dB meter to this output level.

3.6 Rotate the Bass control fully CCW (counter-clockwise). Verify that the output level is -5 dBr, +/- 1.5.

3.7 Rotate the Bass control fully CW (clockwise). Verify that the output level is +5dBr, +/- 1.5dBr.

4. Input Signal Clip Level Test

4.1 Set the front panel Input A / Input B switch to Input A.

4.2 Apply a -52dBV +/- 2dBV, 1kHz sine wave to the RCA input jacks.

4.3 Verify that the Input Signal / Clip LED on the front panel is lit GREEN.

4.4 Apply a -9dBV +/- 2dBV, 1kHz sine wave to the RCA input jacks.

4.5 Verify that the Input Signal / Clip LED on the front panel is lit RED.

4.6 Set the front panel Input A / Input B switch to Input B and repeat steps 4.2 to 4.5.

5. Output Signal Clip Level Test

5.1 Set the front panel Input A / Input B switch to Input A.

5.2 Apply a -49dBV +/- 2dBV, 1kHz sine wave to the RCA input jacks.

5.3 Verify that the Output Signal / Clip LED on the front panel is lit GREEN.

5.4 Apply a -11.0dBV +/- 2dBV, 1kHz sine wave to the RCA input jacks.

5.5 Verify that the Output Signal / Clip LED on the front panel is lit RED.

5.6 Set the front panel Input A / Input B switch to Input B and repeat steps 5.2 to 5.5.

6. Aux Output Tests

6.1 Set the Input A/B switch to Input A. Apply a -12dBV, 1kHz sine wave to the input A RCA jacks. Adjust the Input A gain rear panel control to maximum.

6.2 Verify that the output level at the Aux Output RCA jack is -3dBV +/- 1dBV.

6.3 Using a 20Hz to 20kHz audio filter, measure the THD+N level. Verify that it is $\leq 0.1\%$.

TEST PROCEDURES

6.4 Reference a dB meter to the output level. Change the input frequency to 40Hz. Verify that the output level is -1dB_r +/- 1dB_r. Change the input frequency to 18kHz. Verify that the output level is -1dB_r +/- 1dB_r.

6.5 Remove the input signal. Measure the output noise level using a 20kHz filter and A-weighting. Verify that it is \leq -88dBV.

7. Input Priority Test

7.1 On the front panel, set the Input A / Input B select switch to Input A. On the rear panel, set the Aux Input dip switch to the ENABLED position.

7.2 Apply an audio input to the Input A Euro block connector.

7.3 While the audio from input A is playing, apply an audio input to the 1/8" Aux Input jack on the front panel. Verify that the audio input to the Input A Euro block connector is muted and that the audio input to the Aux Input jack is now heard instead.

7.4 Remove the audio input to the Aux Input jack. Verify that the audio input to the Input A Euro block connector is now heard.

7.5 Remove the audio inputs. Set the Page Mode dip switch on the rear panel to the DUCK position.

7.6 Apply an audio input to the Input A Euro block connector. While the audio from input A is playing, apply an audio input to the Page Input Euro block connector on the rear panel. Verify that the audio input to the Input A Euro block connector is muted and that the audio input to the Page Input jack is now heard instead.

7.7 Remove the audio input to the Aux Input jack. Verify that the audio input to the Input A Euro block connector is now heard.

7.8 Remove the audio inputs. Set the Page Mode dip switch on the rear panel to the MIX position.

7.9 Apply an audio input to the Input A Euro block connector. While the audio from input A is playing, apply an audio input to the Page Input Euro block connector on the rear panel. Verify that the audio input to the Input A Euro block connector and the audio input to the Page Input jack are now both heard together. Return all dip switches to the default positions.

8. Remote Control Test

8.1 Connect a volume control with A/B Select User Interface (Bose® PC 041967) to the Remote Control input jack located on the rear panel. Set the A/B Select dip switch to the REMOTE position.

8.2 Apply two different audio inputs to the Input A and Input B Euro block connectors.

8.3 Verify that you can control the volume level as well as switch between the audio from Input A and Input B using the remote volume control with A/B switch, and that it overrides these controls on the amplifier chassis.

TEST PROCEDURES

8.4 Remove the audio inputs. Move the A/B Select dip switch to the FRONT position. Re-apply the audio inputs. Verify that the remote control is now inactive and that the controls on the amplifier chassis are now working again.

9. Mute Control Test

9.1 Connect a SPST toggle switch, or similar, to the MUTE input jack located on the rear panel.

9.2 Set the Input A/ Input B switch on the front panel to Input A. Apply an audio input to the Input A RCA jacks.

9.3 While audio is playing, close the toggle switch. Verify that the audio output is now muted. Open the toggle switch.

9.4 Remove the audio input to the Input A RCA jacks.

9.5 Apply an audio input to the Aux Input jack located on the front panel. Close the toggle switch. Verify that the audio output is now muted.

10. Auto Standby Test

10.1 Set the Auto Standby dip switch to the ON position. Turn the power switch ON.

10.2 With no input signal applied, verify that the amplifier goes into standby mode after twenty minutes. When the unit is in standby mode, the Power LED will be blinking blue. It is lit solid blue when the unit is in operate mode.

TEST PROCEDURES


IZA 2120-HZ Amplifier Tests

Required Equipment:

- Audio Precision ATS-1 or equivalent
- Audio Precision AUX-0025 digital filter or equivalent
- Remote Volume control with A/B Select User Interface (Bose® PC 041967)
- 2 - 42 ohm (for 70V units) or 83 ohm (for 100V units), 250 Watt load resistors

Test Setup:

- Set the Bass and Treble controls to 12:00 clock, unless otherwise specified.
- Set EQ to “1” FS3/HPF, unless otherwise specified.
- Load is 42ohm/ch for 70V and 83ohm/ch for 100V output units.
- Output gain trim set to max, master volume set to max, unless otherwise specified.
- Input gain trim set to max, unless otherwise specified.
- DIP switch setting as shown.
- All measurements for power amp need to use the AUX-0025 digital filter.

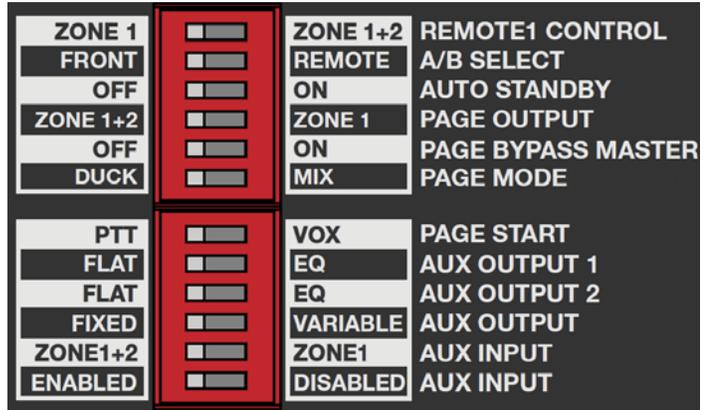

70 Volt Output Mode with 42 ohm load

- On the rear panel, set the 70V / 100V switch to 70V

1. Input Sensitivity and THD+N Tests

1.1 Set the front panel Input A / Input B switch to Input A. Apply a -10dBV +/- 2dBV, 1kHz sine wave to the input A RCA input jacks.

1.2 Verify that the output level is 120W from both channels and that the THD+N is $\leq 0.3\%$.

1.3 Repeat steps 1.1 and 1.2 for the Input B RCA jacks.

1.4 Set the front panel Input A / Input B switch to Input A. Apply a -10dBV +/- 2dBV, 1kHz sine wave to the input A Euro block input jacks.

1.5 Verify that the output level is 120W from both channels. Verify that the THD+N is $\leq 0.3\%$.

1.6 Repeat steps 1.4 and 1.5 for the Input B Euro block input jacks.

1.7 Apply a -58dBV +/- 3dBV, 1kHz sine wave to the Page Input.

1.8 Verify that the output level is 120W from both channels and that the THD+N is $\leq 0.3\%$.

1.9 Apply a -5dBV +/- 2dBV, 1kHz sine wave to the 1/8" Aux input jack on the front panel.

TEST PROCEDURES

1.10 Verify that the output level is 120W from both channels and that the THD+N is $\leq 0.3\%$.

2. Frequency Response and Output Noise Tests

2.1 Set the front panel Input A / Input B switch to Input A. Apply a -30dBV, 1kHz sine wave to the input A RCA jacks. Adjust the Input A gain rear panel control to allow a 1W output level. Reference the dB meter to this output level.

2.2 Change the input frequency to 55Hz. Verify that the output level is -3dB_r +/- 1.

2.3 Change the input frequency to 18kHz. Verify that the output level is -2dB_r +/- 1.

2.4 Turn off the signal generator output. Measure the noise level with a 20kHz filter and A-weighting. Verify that it is ≤ -51 dBV.

2.5 Repeat steps 2.1 to 2.4 for Input B.

2.6 Set the front panel Input A / Input B switch to Input A. Apply a -30dBV, 1kHz sine wave to the input A Euro block jacks. Adjust the Input A gain rear panel control to allow a 1W output level. Reference the dB meter to this output level.

2.7 Change the input frequency to 55Hz. Verify that the output level is -3dB_r +/- 1.

2.8 Change the input frequency to 18kHz. Verify that the output level is -2dB_r +/- 1.

2.9 Turn off the signal generator output. Measure the noise level with a 20kHz filter and A-weighting. Verify that it is ≤ -51 dBV.

2.10 Repeat steps 2.6 to 2.9 for Input B.

2.11 Apply a -30dBV, 1kHz sine wave to the Page Input jack. Adjust the Page Input gain rear panel control to allow a 1W output level. Reference the dB meter to this output level.

2.12 Change the input frequency to 55Hz. Verify that the output level is -5dB_r +/- 1.

2.13 Change the input frequency to 18kHz. Verify that the output level is -3.5dB_r +/- 1.

2.14 Turn off the signal generator output. Measure the noise level with a 20kHz filter and A-weighting. Verify that it is ≤ -48 dBV.

2.15 Apply a -30dBV, 1kHz sine wave to the Aux Input jack located on the front panel. Reference the dB meter to this output level.

2.16 Change the input frequency to 55Hz. Verify that the output level is -3dB_r +/- 1.

2.17 Change the input frequency to 18kHz. Verify that the output level is -2dB_r +/- 1.

2.18 Turn off the signal generator output. Measure the noise level with a 20kHz filter and A-weighting. Verify that it is ≤ -51 dBV.

TEST PROCEDURES

3. Tone Control Frequency Response Tests

- 3.1 Set the front panel Treble and Bass controls to the 12 o'clock position. Set the front panel Input A / Input B switch to Input A.
- 3.2 Apply a -30dBV, 7kHz sine wave to the input A RCA jacks. Adjust the Input A gain rear panel control to allow a 1W output level. Reference the dB meter to this output level.
- 3.3 Rotate the Treble control fully CCW (counter-clockwise). Verify that the output level is -5 dBr, +/- 1.5.
- 3.4 Rotate the Treble control fully CW (clockwise). Verify that the output level is +5dBr, +/- 1.5dBr.
- 3.5 Apply a -30dBV, 100Hz sine wave to the input A RCA jacks. Adjust the Input A gain rear panel control to allow a 1W output level. Reference the dB meter to this output level.
- 3.6 Rotate the Bass control fully CCW (counter-clockwise). Verify that the output level is -5 dBr, +/- 1.5.
- 3.7 Rotate the Bass control fully CW (clockwise). Verify that the output level is +5dBr, +/- 1.5dBr.

4. Input Signal Clip Level Test

- 4.1 Set the front panel Input A / Input B switch to Input A.
- 4.2 Apply a -52dBV +/- 2dBV, 1kHz sine wave to the RCA input jacks.
- 4.3 Verify that the Input Signal / Clip LED on the front panel is lit GREEN.
- 4.4 Apply a -9dBV +/- 2dBV, 1kHz sine wave to the RCA input jacks.
- 4.5 Verify that the Input Signal / Clip LED on the front panel is lit RED.
- 4.6 Set the front panel Input A / Input B switch to Input B and repeat steps 4.2 to 4.5.

5. Output Signal Clip Level Test

- 5.1 Set the front panel Input A / Input B switch to Input A.
- 5.2 Apply a -11.0dBV +/- 2dBV, 1kHz sine wave to the RCA input jacks.
- 5.3 Verify that the Output Signal / Clip LED on the front panel is lit GREEN.
- 5.4 Apply a -49.0dBV +/- 2dBV, 1kHz sine wave to the RCA input jacks.
- 5.5 Verify that the Output Signal / Clip LED on the front panel is lit RED.
- 5.6 Set the front panel Input A / Input B switch to Input B and repeat steps 5.2 to 5.5.

TEST PROCEDURES

100V Output Mode with 83 Ohm Loads

6. Input Sensitivity and THD+N Tests

- On the rear panel, set the 70V / 100V switch to 100V

6.1 Set the front panel Input A / Input B switch to Input A. Apply a -10dBV +/- 2dBV, 1kHz sine wave to the input A RCA input jacks.

6.2 Verify that the output level is 120W from both channels and that the THD+N is $\leq 0.3\%$.

6.3 Repeat steps 6.1 and 6.2 for the Input B RCA jacks.

7. Frequency Response and Output Noise Tests

7.1 Set the front panel Input A / Input B switch to Input A. Apply a -30dBV, 1kHz sine wave to the input A RCA jacks. Adjust the Input A gain rear panel control to allow a 1W output level. Reference the dB meter to this output level.

7.2 Change the input frequency to 55Hz. Verify that the output level is -3dB +/- 1.

7.3 Change the input frequency to 18kHz. Verify that the output level is -2dB +/- 1.

7.4 Turn off the signal generator output. Measure the noise level with a 20kHz filter and A-weighting. Verify that it is ≤ -48 dBV.

7.5 Repeat steps 7.1 to 7.4 for Input B.

8. Output Signal Clip Level Test

8.1 Set the front panel Input A / Input B switch to Input A.

8.2 Apply a -11.0dBV +/- 2dBV, 1kHz sine wave to the RCA input jacks.

8.3 Verify that the Output Signal / Clip LED on the front panel is lit GREEN.

8.4 Apply a -49.0dBV +/- 2dBV, 1kHz sine wave to the RCA input jacks.

8.5 Verify that the Output Signal / Clip LED on the front panel is lit RED.

8.6 Set the front panel Input A / Input B switch to Input B and repeat steps 8.2 to 8.5.

9. Aux Output Tests

9.1 Set the Input A/B switch to Input A. Apply a -12dBV, 1kHz sine wave to the input A RCA jacks. Adjust the Input A gain rear panel control to maximum.

9.2 Verify that the output level at the Aux Output RCA jack is -3dBV +/- 1dBV.

9.3 Using a 20Hz to 20kHz audio filter, measure the THD+N level. Verify that it is $\leq 0.1\%$.

TEST PROCEDURES

9.4 Reference a dB meter to the output level. Change the input frequency to 55Hz. Verify that the output level is -1dB_r +/- 1dB_r. Change the input frequency to 18kHz. Verify that the output level is -1dB_r +/- 1dB_r.

9.5 Remove the input signal. Measure the output noise level using a 20kHz filter and A-weighting. Verify that it is \leq -88dBV.

10. Input Priority Test

10.1 On the front panel, set the Input A / Input B select switch to Input A. On the rear panel, set the Aux Input dip switch to the ENABLED position.

10.2 Apply an audio input to the Input A Euro block connector.

10.3 While the audio from input A is playing, apply an audio input to the 1/8" Aux Input jack on the front panel. Verify that the audio input to the Input A Euro block connector is muted and that the audio input to the Aux Input jack is now heard instead.

10.4 Remove the audio input to the Aux Input jack. Verify that the audio input to the Input A Euro block connector is now heard.

10.5 Remove the audio inputs. Set the Page Mode dip switch on the rear panel to the DUCK position.

10.6 Apply an audio input to the Input A Euro block connector. While the audio from input A is playing, apply an audio input to the Page Input Euro block connector on the rear panel. Verify that the audio input to the Input A Euro block connector is muted and that the audio input to the Page Input jack is now heard instead.

10.7 Remove the audio input to the Aux Input jack. Verify that the audio input to the Input A Euro block connector is now heard.

10.8 Remove the audio inputs. Set the Page Mode dip switch on the rear panel to the MIX position.

10.9 Apply an audio input to the Input A Euro block connector. While the audio from input A is playing, apply an audio input to the Page Input Euro block connector on the rear panel. Verify that the audio input to the Input A Euro block connector and the audio input to the Page Input jack are now both heard together. Return all dip switches to the default positions.

11. Remote Control Test

11.1 Connect a volume control with A/B Select User Interface (Bose® PC 041967) to the Remote Control input jack located on the rear panel. Set the A/B Select dip switch to the REMOTE position.

11.2 Apply two different audio inputs to the Input A and Input B Euro block connectors.

11.3 Verify that you can control the volume level as well as switch between the audio from Input A and Input B using the remote volume control with A/B switch, and that it overrides these controls on the amplifier chassis.

TEST PROCEDURES

11.4 Remove the audio inputs. Move the A/B Select dip switch to the FRONT position. Re-apply the audio inputs. Verify that the remote control is now inactive and that the controls on the amplifier chassis are now working again.

12. Mute Control Test

12.1 Connect a SPST toggle switch, or similar, to the MUTE input jack located on the rear panel.

12.2 Set the Input A / Input B switch on the front panel to Input A. Apply an audio input to the Input A RCA jacks.

12.3 While audio is playing, close the toggle switch. Verify that the audio output is now muted. Open the toggle switch.

12.4 Remove the audio input to the Input A RCA jacks.

12.5 Apply an audio input to the Aux Input jack located on the front panel. Close the toggle switch. Verify that the audio output is now muted.

13. Auto Standby Test

13.1 Set the Auto Standby dip switch to the ON position. Turn the power switch ON.

13.2 With no input signal applied, verify that the amplifier goes into standby mode after twenty minutes. When the unit is in standby mode, the Power LED will be blinking blue. It is lit solid blue when the unit is in operate mode.

TEST PROCEDURES

ZA 2120-LZ Amplifier Tests

Required Equipment:

- Audio Precision ATS-1 or equivalent
- Audio Precision AUX-0025 digital filter or equivalent
- Bose® Volume Control User Interface (PC 041966)
- 2- 4 ohm, 250 Watt load resistors

Test Setup

- Output mode set to stereo, unless otherwise specified.
- Load 4 ohms.
- Auto standby switch set to “OFF”
- Output gain trim set to max.
- All measurements for power amp needs to use an AUX-0025 Filter.

1. Output Gain Test

- 1.1 Place the Mono / Stereo output switch to the Stereo position.
- 1.2 Apply a 1kHz, 1.0dBV sine wave to the RCA input jacks.
- 1.3 Measure the output level. Verify that it is +26.8dBV +/- 0.5 dBV.
- 1.4 Place the Mono / Stereo output switch to the Mono position.
- 1.5 Apply a 1kHz, -5.0dBV sine wave to the RCA input jacks.
- 1.6 Measure the output level. Verify that it is +26.8dBV +/- 0.5 dBV.
- 1.7 Measure the THD+N level. Verify that it is $\leq 0.5\%$.

2. Frequency Response Test

- 2.1 Apply a -21dBV, 1kHz sine wave to the RCA input jacks. Adjust the signal input level to provide a 1W output across the 4 ohm loads. Reference a dB meter to this output level.
- 2.2 Change the input frequency to 40Hz. Measure the output level. Verify that it is -1dBr +/- 1dBr.
- 2.3 Change the input frequency to 18kHz. Measure the output level. Verify that it is -1dBr +/- 1dBr.

3. Signal to Noise Test

- 3.1 Apply a -1.0dBV, 1kHz sine wave to the input RCA jacks. Verify that you have a 120W output from both channels.
- 3.2 Measure the signal-to-noise level, using a 20kHz filter and A-weighting. Verify that it is ≥ 88 dBV.

TEST PROCEDURES

4. Input Signal Clip Level Test

- 4.1 Apply a -36dBV +/- 3.5dBV, 1kHz sine wave to the RCA input jacks.
- 4.2 Verify that the Input Signal / Clip LED on the front panel is lit GREEN.
- 4.3 Apply a +10dBV +/- 2dBV, 1kHz sine wave to the RCA input jacks.
- 4.4 Verify that the Input Signal / Clip LED on the front panel is lit RED.

5. Output Signal Clip Level Test

- 5.1 Apply a -33dBV +/- 2.5dBV, 1kHz sine wave to the RCA input jacks.
- 5.2 Verify that the Output Signal / Clip LED on the front panel is lit GREEN.
- 5.3 Apply a +14.8dBV +/- 2.5dBV, 1kHz sine wave to the RCA input jacks.
- 5.4 Verify that the Output Signal / Clip LED on the front panel is lit RED.

6. Remote Control Test

- 6.1 Connect a volume control with A/B Select User Interface (Bose® PC 041967) to the Remote Control input jack located on the rear panel. Set the A/B Select dip switch to the REMOTE position.
- 6.2 Apply two different audio inputs to the Input A and Input B Euro block connectors.
- 6.3 Verify that you can control the volume level as well as switch between the audio from Input A and Input B using the remote volume control with A/B switch, and that it overrides these controls on the amplifier chassis.
- 6.4 Remove the audio inputs. Move the A/B Select dip switch to the FRONT position. Re-apply the audio inputs. Verify that the remote control is now inactive and that the controls on the amplifier chassis are now working again.

7. Mute Control Test

- 7.1 Connect a SPST toggle switch, or similar, to the MUTE input jack located on the rear panel.
- 7.2 Set the Input A / Input B switch on the front panel to Input A. Apply an audio input to the Input A RCA jacks.
- 7.3 While audio is playing, close the toggle switch. Verify that the audio output is now muted. Open the toggle switch.
- 7.4 Remove the audio input to the Input A RCA jacks.
- 12.5 Apply an audio input to the Aux Input jack located on the front panel. Close the toggle switch. Verify that the audio output is now muted.

TEST PROCEDURES

13. Auto Standby Test

13.1 Set the Auto Standby dip switch to the ON position. Turn the power switch ON.

13.2 With no input signal applied, verify that the amplifier goes into standby mode after twenty minutes. When the unit is in standby mode, the Power LED will be blinking blue. It is lit solid blue when the unit is in operate mode.

TEST PROCEDURES

ZA 2120-HZ Amplifier Tests

Required Equipment:

- Audio Precision ATS-1 or equivalent
- Audio Precision AUX-0025 digital filter or equivalent
- Bose® Volume Control User Interface (PC 041966)
- 2 - 42 ohm (for 70V units) or 83 ohm (for 100V units), 250 Watt load resistors

Test Setup

- Output gain trim set to max.
- Output mode set to “DUAL”, unless otherwise specified.
- Load 42 ohms/ch for 70V and 83 ohms/ch for 100V output.
- Auto standby switch set to “OFF”
- All measure including power amp needs add an AUX-0025 Filter.

70V Output Mode Tests

- Set the 70V / 100V output switch to 70V output.
- Connect the amplifier outputs to 42 ohm, 250W loads.

1. Output Gain Test

1.1 Place the Input Mode switch to the Dual position.

1.2 Apply a 1kHz, -2.5dBV sine wave to the RCA input jacks.

1.3 Measure the output level. Verify that it is +37.0dBV +/- 0.5 dBV.

1.4 Measure the THD+N level. Verify that it is $\leq 0.3\%$.

2. Frequency Response Test

2.1 Apply a -23dBV, 1kHz sine wave to the RCA input jacks. Adjust the signal input level to provide a 1W output across the 42 ohm loads. Reference a dB meter to this output level.

2.2 Change the input frequency to 55Hz. Measure the output level. Verify that it is -3dBr +/- 1dBr.

2.3 Change the input frequency to 18kHz. Measure the output level. Verify that it is -1.5dBr +/- 1dBr.

3. Signal to Noise Test

3.1 Apply a -2.5dBV, 1kHz sine wave to the input RCA jacks. Verify that you have a 120W output from both channels.

3.2 Measure the signal-to-noise level, using a 20kHz filter and A-weighting. Verify that it is ≥ 88 dBV.

TEST PROCEDURES

4. Input Signal Clip Level Test

- 4.1 Apply a -36dBV +/- 3.5dBV, 1kHz sine wave to the RCA input jacks.
- 4.2 Verify that the Input Signal / Clip LED on the front panel is lit GREEN.
- 4.3 Apply a +10dBV +/- 2dBV, 1kHz sine wave to the RCA input jacks.
- 4.4 Verify that the Input Signal / Clip LED on the front panel is lit RED.

5. Output Signal Clip Level Test

- 5.1 Apply a +1.5dBV +/- 2.5dBV, 1kHz sine wave to the RCA input jacks.
- 5.2 Verify that the Output Signal / Clip LED on the front panel is lit GREEN.
- 5.3 Apply a +35.0dBV +/- 2.5dBV, 1kHz sine wave to the RCA input jacks.
- 5.4 Verify that the Output Signal / Clip LED on the front panel is lit RED.

100V Output Mode Tests

- Set the 70V / 100V output switch to 100V output.
- Connect the amplifier outputs to 83 ohm, 250W loads.

1. Output Gain Test

- 1.1 Place the Input Mode switch to the Dual position.
- 1.2 Apply a 1kHz, 0.5dBV sine wave to the RCA input jacks.
- 1.3 Measure the output level. Verify that it is +40.0dBV +/- 0.5 dBV.
- 1.4 Measure the THD+N level. Verify that it is $\leq 0.3\%$.

2. Frequency Response Test

- 2.1 Apply a -20dBV, 1kHz sine wave to the RCA input jacks. Adjust the signal input level to provide a 1W output across the 42 ohm loads. Reference a dB meter to this output level.
- 2.2 Change the input frequency to 55Hz. Measure the output level. Verify that it is -3dBr +/- 1dBr.
- 2.3 Change the input frequency to 18kHz. Measure the output level. Verify that it is -1.5dBr +/- 1dBr.

3. Signal to Noise Test

- 3.1 Apply a 0.5dBV, 1kHz sine wave to the input RCA jacks. Verify that you have a 120W output from both channels.

TEST PROCEDURES

3.2 Measure the signal-to-noise level, using a 20kHz filter and A-weighting. Verify that it is $\geq 88\text{dBV}$.

4. Input Signal Clip Level Test

4.1 Apply a $-36\text{dBV} \pm 3.5\text{dBV}$, 1kHz sine wave to the RCA input jacks.

4.2 Verify that the Input Signal / Clip LED on the front panel is lit GREEN.

4.3 Apply a $+10\text{dBV} \pm 2\text{dBV}$, 1kHz sine wave to the RCA input jacks.

4.4 Verify that the Input Signal / Clip LED on the front panel is lit RED.

5. Output Signal Clip Level Test

5.1 Apply a $+4.5\text{dBV} \pm 2.5\text{dBV}$, 1kHz sine wave to the RCA input jacks.

5.2 Verify that the Output Signal / Clip LED on the front panel is lit GREEN.

5.3 Apply a $+38.0\text{dBV} \pm 2.5\text{dBV}$, 1kHz sine wave to the RCA input jacks.

5.4 Verify that the Output Signal / Clip LED on the front panel is lit RED.

6. Remote Control Test

6.1 Connect a Bose® Volume Control User Interface (PC 041966) to the Remote Control input jack located on the rear panel. Set the Remote 1 control switch on the rear panel to Zone 1+2.

6.2 Apply an audio input to the RCA input jacks.

6.3 Verify that you can control the volume level of the audio outputs.

7. Mute Control Test

7.1 Connect a SPST toggle switch, or similar, to the MUTE input jack located on the rear panel.

7.2 Apply an audio input to the Input RCA jacks.

7.3 While audio is playing, close the toggle switch. Verify that the audio output is now muted. Open the toggle switch.

8. Auto Standby Test

8.1 Set the Auto Standby switch to the ON position. Turn the power switch ON.

8.2 With no input signal applied, verify that the amplifier goes into standby mode after twenty minutes. When the unit is in standby mode, the Power LED will be blinking blue. It is lit solid blue when the unit is in operate mode.

TEST PROCEDURES

Hi-Pot Test

THIS IS A MANDATORY TEST

Note: If an the unit under test requires disassembly as part of the repair, it **MUST** be Hi-Pot tested before being returned to the customer to ensure that there is no potential shock hazard. This test requires a Hi-Pot tester with a ground bond attachment to perform this test.

Connections:

The Hi-Pot tester connects to the unit under test (UUT) by means of a wiring harness. The AC line cord of the UUT plugs into the Hi-Pot tester AC adapter box. The return line connects to all output connectors.

Hi-Pot Tester Settings:

AC Input to Earthed Parts

All units - 1500 VAC, rise time = 1 sec., dwell = 3 seconds, current limit = 5.0 mA

- Connect the AC mains cord to loudspeaker under test. Plug the other end of the AC cord into the Hi-Pot tester AC adapter box. The AC adapter box connects to the High Voltage (HV) connection on the Hi-Pot tester.
- Connect the Hi-Pot tester RETURN line to a ground point on the chassis.
- With the tester set to the above parameters, perform the test. If the unit fails, troubleshoot it and repair the problem. If it passes this portion of the test, proceed to the below test.

AC Input to Output Connectors

All units - 2500 VAC, rise time = 1 sec., dwell = 3 seconds, current limit = 5.0 mA

- Connect the AC mains cord to loudspeaker under test. Plug the other end of the AC cord into the Hi-Pot tester AC adapter box. The AC adapter box connects to the High Voltage (HV) connection on the Hi-Pot tester.
- Connect the Hi-Pot tester RETURN line to all output connectors.
- With the tester set to the above parameters, perform the test. If the unit fails, troubleshoot it and repair the problem. Once the unit is repaired, repeat the Hi-Pot and the ground bond test to ensure the unit is safe to return to the customer.

Ground Bond Test

Note: This test only needs to be performed if the chassis ground wire from the AC IEC connector to the inside of the chassis of the unit has been removed or disturbed as part of a repair. If it has not, this test does not need to be performed. This test measures current handling capability between the ground blade on the AC inlet or mains plug and the earth bond point on the chassis of the unit.

Ground Bond Tester Settings:

10A, < 12VAC open circuit, < 0.1 Ohms from AC earth terminal on IEC connector in chassis, to earth bond point on rear of chassis. Test duration = 3 seconds.

- Connect the AC mains cord to the back of the amplifier under test. Plug the other end of the AC cord into the ground bond test box.
- With the tester set to the above parameters, perform the test. If the unit fails, remove the top cover and repair the problem. Once the unit is repaired, repeat the Hi-Pot and the ground bond tests to ensure the unit is safe to return to the customer.


SOFTWARE UPDATE PROCEDURES

This update procedure uses a Trek update program for the IZA amplifier family.


Step 1: Download the Trek updater program from the IZA/ZA 2120-HZ/LZ product page on the Bose Service web site at <http://intranet.bose.com/tsg> or <http://serviceops.bose.com>. Install the program by double-clicking on the Trek V1.0.exe file. After installing the Trek program, start the application by opening **Trek V1.0.exe**. Connect the IZA 2120 to the computer using a standard USB A to B cable.




Step 2: Turn on power the IZA 2120 and make sure it connects to the Trek program. The program should detect that the firmware needs to be updated. Click on the “Yes” button to continue.

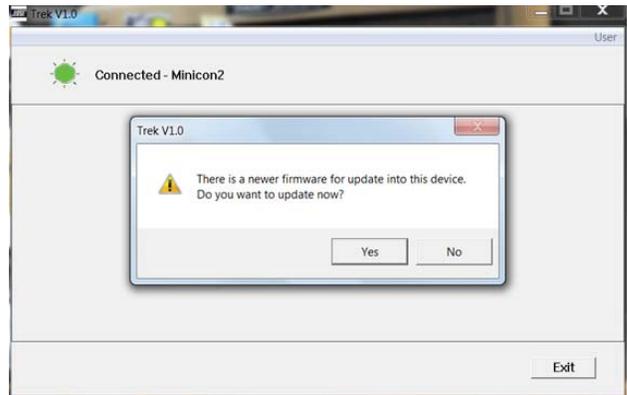

Step 3: If the last step was successful you can move on to step 4, but if the program does not detect that the amplifier requires an update or if the user wants to load an older version of code, click on the “User” button and select “Update Firmware” to proceed to the next window.

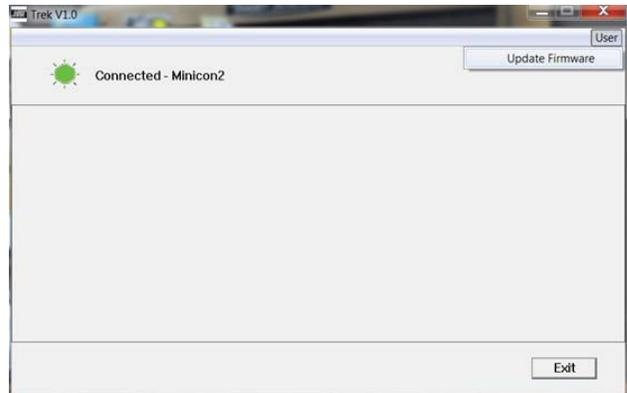


Step 4: The version of code that was released at SOP is **MiniCon MCU+DSP V0.22.bin**. If a different version is desired the user would click the “Browse” button and search and select the file version as you would with any typical windows program. Once the file is selected click the “Update” button to start the update.

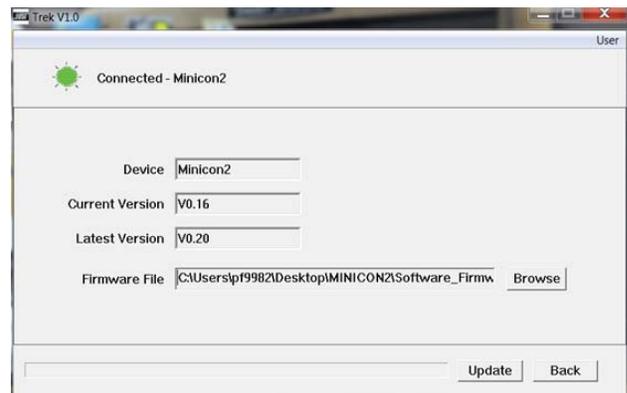

SOFTWARE UPDATE PROCEDURES

Step 5: When the update is complete, click the “OK” button.

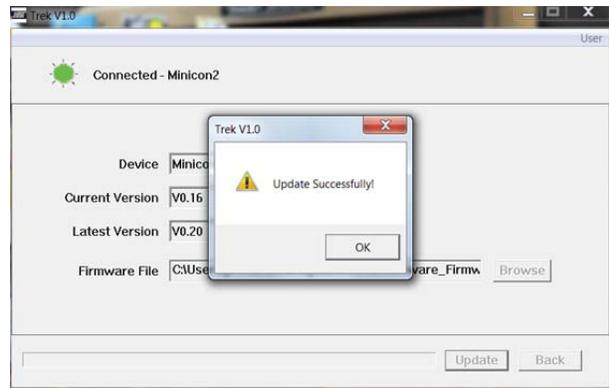


Step 6: The amplifier will reset itself.



Step 7: The installation is complete when the Trek program gets back to the connected screen. The user can now unplug the USB cable and the IZA 2120 is ready to use. There is no need to power cycle the amplifier.

End of Update Procedure

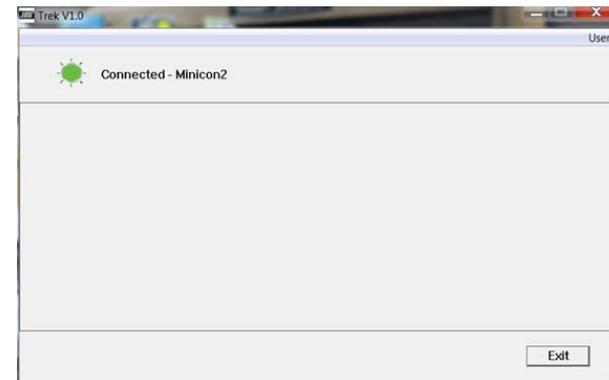

SERVICE MANUAL REVISION HISTORY

| Date | Revision Level | Description of Change | Change Driven By | Pages Affected |
|-------------|-----------------------|---|-------------------------|-----------------------|
| 10/15 | 00 | Document released at revision 00. | Service manual release | All |
| 7/16 | 01 | - Packing and Main parts list changes - Test procedure changes | Updates | 22-26 107-123 |

SPECIFICATIONS AND FEATURES SUBJECT TO CHANGE WITHOUT NOTICE

BOSE[®]
Better sound through research[®]

Bose Corporation
The Mountain
Framingham Massachusetts USA 01701

P/N: 719782-SM Rev. 01, 7/2016 (P)
<http://serviceops.bose.com>