

# ShowTime SK10

## full-range passive loudspeaker

### Product Overview

ShowTime SK10 is a 10-inch full-range passive loudspeaker built for indoor entertainment venues where music needs impact and vocals need clarity, in a more compact form factor. Designed for bars, lounges, restaurants, private rooms, KTV/karaoke spaces, and small live-music applications, SK10 combines high-output performance with the practical details integrators need for everyday installations. A 10-inch woofer, Bose Professional EMB2S compression driver, and rear-ported design deliver punchy bass response, clear vocal presence, and smooth, balanced sound. Neutrik® speakON® input and loop-through connectors, M8 threaded inserts, rotatable 90° × 60° coverage, and an available pole-mount adapter or pan-and-tilt bracket support flexible system designs.



### Key Features

**High-output 10-inch performance** delivers the power and impact needed for music-forward entertainment spaces in a compact form factor

**Bose Professional EMB2S compression driver** supports clear vocal presence and tonal consistency for music, live performance, announcements, and KTV/karaoke applications

**Rear-ported enclosure design** extends low-frequency response for punchy, balanced sound in indoor entertainment environments

**90° × 60° rotatable coverage** supports flexible horizontal or vertical placement to suit room layouts and system designs

**Neutrik® speakON® input and loop-through connectors** support secure amplifier connection and simple daisy-chaining across distributed loudspeaker systems

**M8 threaded inserts and available pole-mount adapter or pan-and-tilt bracket** give integrators options for permanent installation or flexible entertainment setups

**Professional-grade materials and components** support dependable performance in demanding commercial environments

### Applications

Bars and lounges

Clubs

Restaurants

Private rooms

KTV and karaoke

Live music venues

DJ entertainment

Sports bars

Houses of worship

# ShowTime SK10

## full-range passive loudspeaker

### Technical Specifications

| SINGLE-LOUDSPEAKER PERFORMANCE                        |                                                                                                                                                                                                                                                                                            |
|-------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| System Type                                           | Passive 2-way bass-reflex system, rear-ported                                                                                                                                                                                                                                              |
| Frequency Response (-3 dB) <sup>1</sup>               | 85 Hz – 16,000 Hz                                                                                                                                                                                                                                                                          |
| Frequency Range (-10 dB) <sup>1</sup>                 | 50 Hz – 20,000 Hz                                                                                                                                                                                                                                                                          |
| Nominal Coverage Pattern                              | 90° horizontal × 60° vertical, rotatable                                                                                                                                                                                                                                                   |
| Audio Performance                                     |                                                                                                                                                                                                                                                                                            |
| Power Handling, Long-term Continuous <sup>2</sup>     | 500 W                                                                                                                                                                                                                                                                                      |
| Power Handling, Peak <sup>2</sup>                     | 2000 W                                                                                                                                                                                                                                                                                     |
| Sensitivity (SPL / 1 W @ 1 m) <sup>3</sup>            | 96 dB                                                                                                                                                                                                                                                                                      |
| Calculated Maximum SPL @ 1 m, Continuous <sup>4</sup> | 123 dB                                                                                                                                                                                                                                                                                     |
| Calculated Maximum SPL @ 1 m, Peak                    | 129 dB                                                                                                                                                                                                                                                                                     |
| Crossover                                             | 1.9 kHz, passive internal crossover                                                                                                                                                                                                                                                        |
| Loudspeaker EQ                                        | None required. Bose Professional EQ preset available.                                                                                                                                                                                                                                      |
| TRANSDUCERS                                           |                                                                                                                                                                                                                                                                                            |
| Low Frequency                                         | 1 × 10-in (254 mm) ferrite woofer                                                                                                                                                                                                                                                          |
| High Frequency                                        | 1 × Bose Professional EMB2S titanium-diaphragm, neodymium compression driver with 2-in (51 mm) voice coil                                                                                                                                                                                  |
| Nominal Impedance                                     | 8 Ω                                                                                                                                                                                                                                                                                        |
| PHYSICAL                                              |                                                                                                                                                                                                                                                                                            |
| Enclosure Material                                    | 15 mm plywood, hexagonal enclosure                                                                                                                                                                                                                                                         |
| Finish                                                | Polyurethane coating                                                                                                                                                                                                                                                                       |
| Grille                                                | Perforated steel, powder-coated finish, black                                                                                                                                                                                                                                              |
| Color                                                 | Black                                                                                                                                                                                                                                                                                      |
| Environmental                                         | Indoors only                                                                                                                                                                                                                                                                               |
| Connectors                                            | (2) Neutrik® speakON® NL4MP                                                                                                                                                                                                                                                                |
| Suspension / Mounting                                 | (3) M8 threaded inserts (bottom panel, for optional external pole mount adapter)<br>(3) M8 threaded inserts (top panel, for eyebolt suspension)<br>(4) M8 threaded inserts (side panel, for eyebolt suspension)<br>(4) M8 threaded inserts (rear panel, for optional pan-and-tilt bracket) |
| Product Dimensions (height × width × depth)           | 533 mm × 300 mm × 380 mm (21.0 in × 11.8 in × 15.0 in)                                                                                                                                                                                                                                     |
| Net Weight                                            | 18.7 kg (41.3 lb)                                                                                                                                                                                                                                                                          |
| Shipping Weight                                       | 21.6 kg (47.6 lb)                                                                                                                                                                                                                                                                          |
| Package Contents                                      | (1) ShowTime SK10, (1) installation guide                                                                                                                                                                                                                                                  |
| Optional Accessories                                  | AMUPOLEAT external pole adapter, UPTB50 pan-and-tilt bracket                                                                                                                                                                                                                               |
| PRODUCT CODES                                         |                                                                                                                                                                                                                                                                                            |
| ShowTime SK10 loudspeaker                             | A02195-0100 SPKR,SHOWTIME SK10,BLK                                                                                                                                                                                                                                                         |
| AMUPOLEAT external pole adapter                       | 893630-0100 KIT,AMU POLE CUP,BLK                                                                                                                                                                                                                                                           |
| UPTB50 pan-and-tilt bracket, black                    | A02221-0100 UPTB50,PAN&TILT WALL BRKT,BLK                                                                                                                                                                                                                                                  |

#### Footnotes

1. Full space (4π) conditions.

2. Test using pink noise filtered to meet IEC 268-5, 6-dB crest factor, 500 W for 2 hours.

3. Sensitivity measured in anechoic environment with recommended loudspeaker processing.


4. Maximum SPL calculated using sensitivity and power ratings, exclusive of power compression.

For additional specifications and application information, visit [BoseProfessional.com](https://BoseProfessional.com). Specifications are subject to change. 07/2026


## ShowTime SK10

full-range passive loudspeaker

### Frequency Response <sup>5</sup>

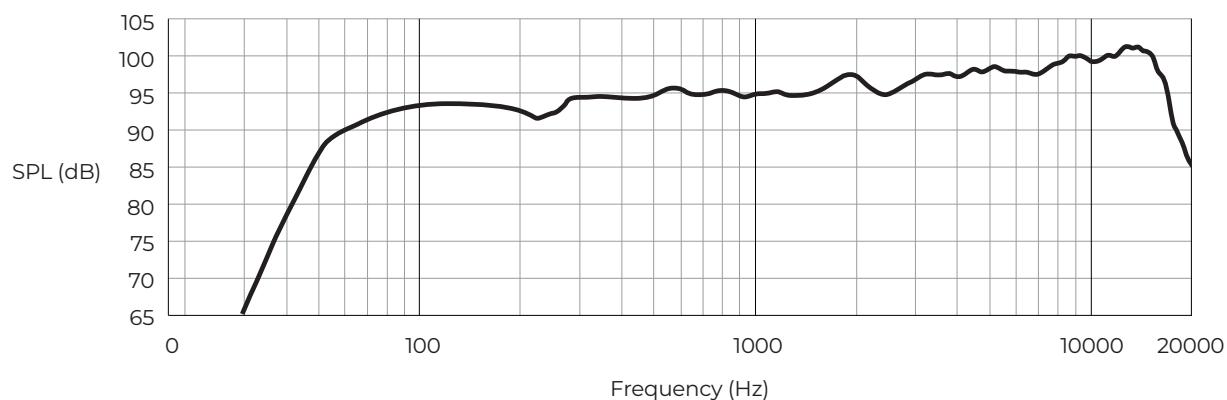

### Beamwidth <sup>6</sup>

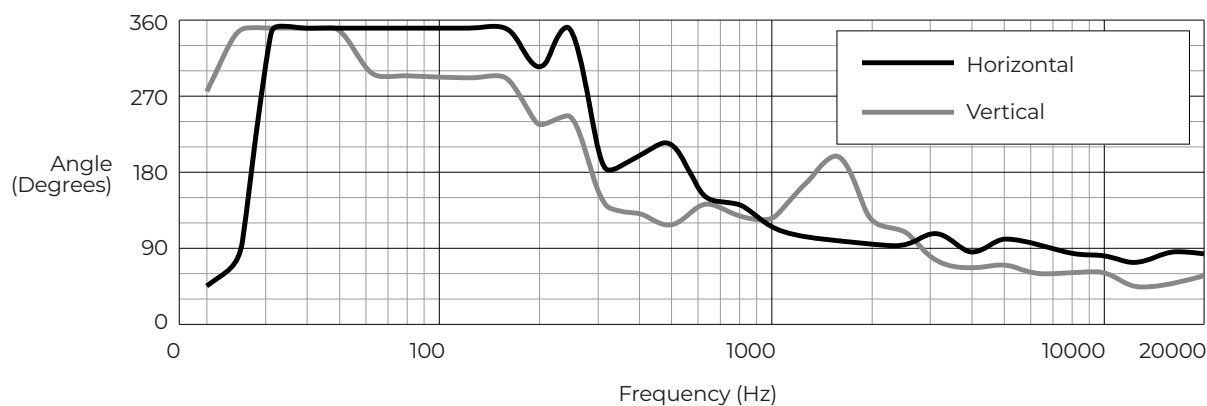


5. 20  $\mu$ Pa reference.

6.  $r = 1$  m.  $\Phi = 90^\circ$ .


# ShowTime SK10

full-range passive loudspeaker


## Dimensions <sup>7</sup>

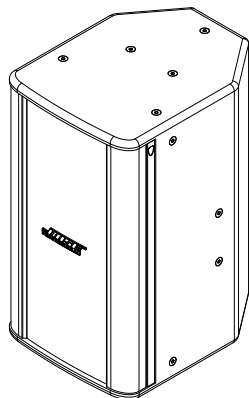


Right View <sup>8</sup>

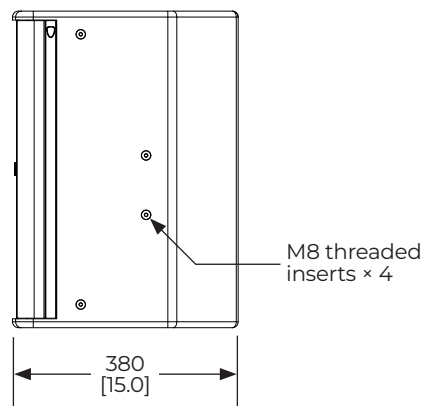


Front View




Rear View

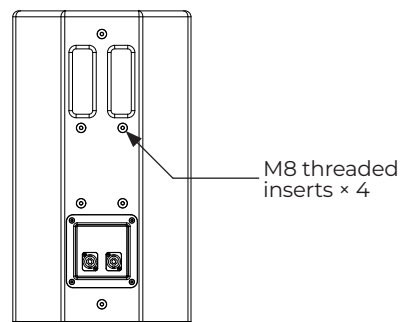

Bottom View

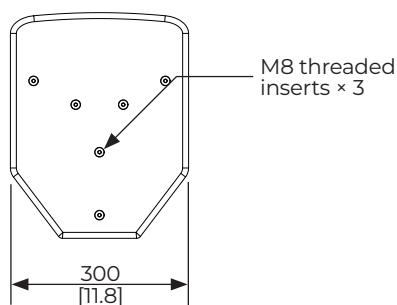

Top View

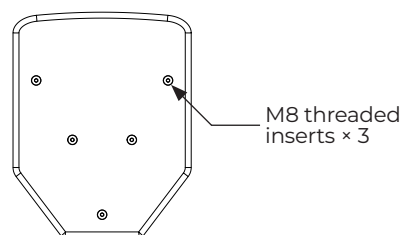

7. Dimensions are shown in millimeters over inches.

8. Dimensions also apply to opposite side.