

# Bose® PowerMatch® AES3 Digital Input Card

## Installation Guide

### CAUTIONS:


- This product is intended for installation by professional installers only.
- Make no modification to the system or accessories. Unauthorized alterations may compromise safety, regulatory compliance, and system performance.
- Electro-Static Discharge (ESD) sensitive device. Handle with care.
- F/UTP shielded Cat5e cabling is recommended for use with this product.

This document provides professional installers with basic installation and safety guidelines for installing the PowerMatch AES3 digital input card in a Bose PowerMatch amplifier. Please read this document before attempting installation.


The PowerMatch AES3 digital input card inserts into the digital expansion card slot and provides 8 channels of AES3 digital audio.

### To install the AES3 digital input card:


1. Unplug the PowerMatch amplifier.
2. Remove the rear expansion slot cover by removing the two cover screws.

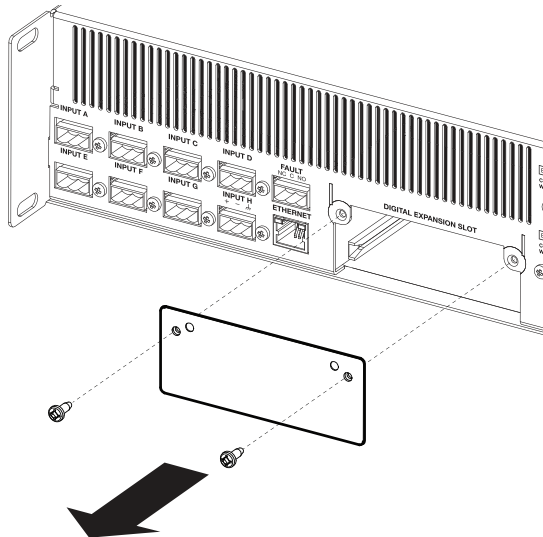

3. Align the AES3 card with the plastic card guides in the open slot. Insert the card until the rear panel is flush with the amplifier.

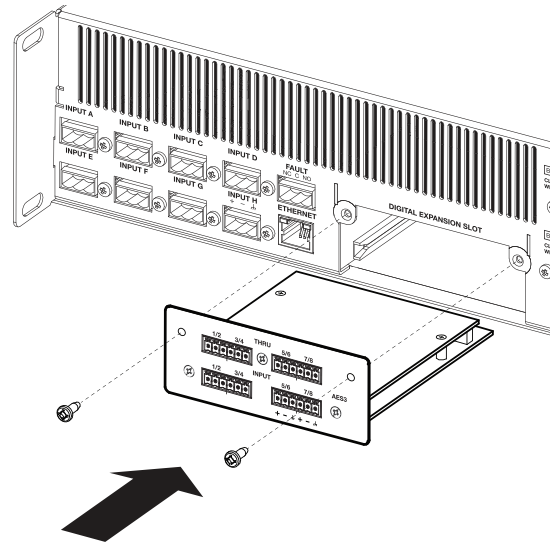

4. Secure the card in the slot using the two cover screws removed earlier.
5. Plug in the power cord to turn on the PowerMatch amplifier.
6. Using the front panel, navigate to the FIRMWARE VERSION screen (MAIN MENU<UTILITY<FIRMWARE VERSION).
7. Confirm that the installed AES3 card is identified in the LCD screen:

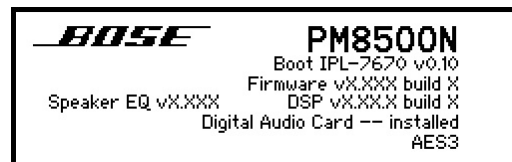

8. If the card does not appear in the FIRMWARE VERSION screen, repeat steps 1-7. Be sure that the card is completely pushed into the slot, and that the card is properly aligned with the card guides.

©2014 Bose Corporation. All rights reserved.  
All trademarks are the property of their respective owners.



726363-0010

**BOSE**  
Better sound through research®

© 2014 Bose Corporation. The Mountain,  
Framingham, MA 01701-9168 USA  
AM 726363 Rev. 00  
[www.pro.Bose.com](http://www.pro.Bose.com)