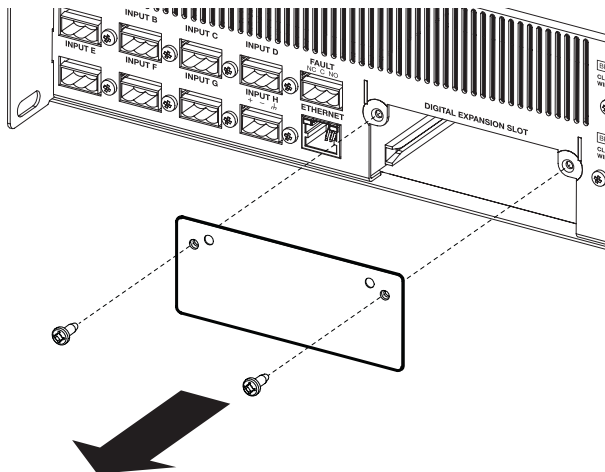# PowerMatch
Dante™ Network Card

Thank you for selecting Bose Professional PowerMatch amplifiers for your sound reinforcement system. This document is intended to provide professional installers with basic installation and safety guidelines for installing the optional Dante network card in a PowerMatch amplifier. Please read this document before attempting installation.

The Dante card provides audio connectivity with any device capable of Dante networking and is capable of receiving up to 8 audio channels and transmitting up to 8 audio monitoring channels.
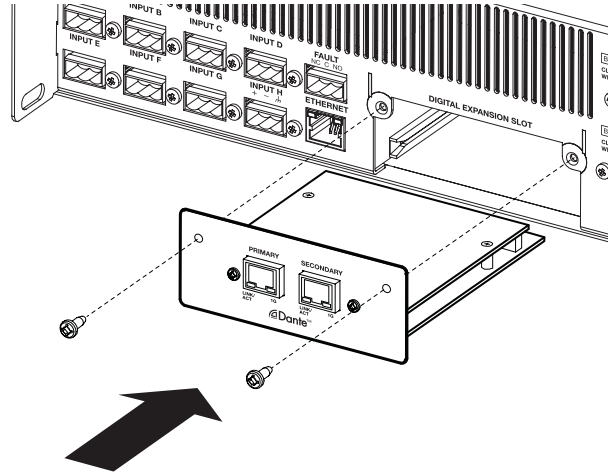
For further details on network best practices, how to use Dante Controller and how to interface PCs and Macs using Dante Virtual Soundcard, visit **audinate.com**.

To install the Dante network card:

1. Turn off and unplug the PowerMatch amplifier.
2. Remove the rear expansion slot cover by removing the 2 cover screws.

3. Align the Dante card with the plastic card guides in the open slot. Insert the card until the rear panel is flush with the amplifier.
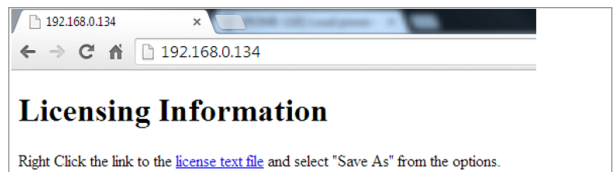

4. Secure the card in the slot using the 2 cover screws removed earlier.
5. Plug in the power cord and turn on the PowerMatch amplifier.
6. Using the front panel, navigate to the **FIRMWARE VERSION** screen (**MAIN MENU** > **UTILITY** > **FIRMWARE VERSION**).
7. Confirm that the installed Dante card is identified in the LCD screen:

8. If the card does not appear in the FIRMWARE VERSION screen, repeat Steps 1–7. Be sure that the card is completely pushed into the slot, and that the card is properly aligned with the card guides.

To obtain the Third-Party Software License Disclosure for this product:

1. Using ControlSpace Designer software, determine the IP address of the Dante network card.
2. Type the IP address into any browser. The response should look like the following example.

3. To read the file in the browser, click **license text file**. To save the file to your PC, right-click **license text file** and select the **Save link as...** option.

626033-0030