

CE This product conforms to all applicable EU directive requirements. The complete declaration of conformity can be found at the product-specific page: BoseProfessional.com

UK CA This product conforms to all applicable Electromagnetic Compatibility Regulations 2016 and all other applicable UK regulations. The complete declaration of conformity can be found at the product-specific page: BoseProfessional.com

CAUTIONS:

- This product is intended for installation by professional installers only.
- Make no modification to the system or accessories. Unauthorized alterations may compromise safety, regulatory compliance, and system performance.
- Electro-Static Discharge (ESD) sensitive device. Handle with care.
- F/UTP shielded Cat5e cabling is recommended for use with this product.

EU Importer: Transom Post Netherlands B.V., Keizersgracht 391A, 1016 EJ, Amsterdam | **UK Importer:** Transom Post Netherlands UK, Squires House 205a High Street, West Wickham, BR4 0PH | **Japan Importer:** Transom Post International Japan KK Co., Ltd. PMO Tamachi IV Shiba5-29-19, Minato-ku, Tokyo | **Australia Importer:** Transom Post Australia Pty. Ltd., Level 14, 60 Margaret Street, Sydney, NSW 2000 | **China Importer:** Transom Post (Shanghai) Audio Co. Ltd Room 2209, Building 1, 175 Longyao Road, Xuhui District, Shanghai | **Mexico Importer:** POST INTL MEXICO, S. DE R.L. DE C.V. Insurgentes Sur No. 1079, 1st floor, Colonia Noche Buena, Benito Juárez, C.P. 03270, Mexico City | **UAE Importer:** 102 A, Sama Tower Sheikh Zayed Road, Dubai UAE

Bose Professional, 117 South St, Hopkinton, MA 01748 USA

Bose is a trademark of Bose Corporation. PowerMatch is a trademark of Transom Post OpCo LLC. Dante is a trademark of Audinate Pty Ltd.


Thank you for selecting Bose Professional PowerMatch amplifiers for your sound reinforcement system. This document is intended to provide professional installers with basic installation and safety guidelines for installing the optional Dante network card in a PowerMatch amplifier. Please read this document before attempting installation.

The Dante card provides audio connectivity with any device capable of Dante networking and is capable of receiving up to 8 audio channels and transmitting up to 8 audio monitoring channels.


For further details on network best practices, how to use Dante Controller and how to interface PCs and Macs using Dante Virtual Soundcard, visit audinate.com.

To install the Dante network card:

1. Turn off and unplug the PowerMatch amplifier.
2. Remove the rear expansion slot cover by removing the 2 cover screws.

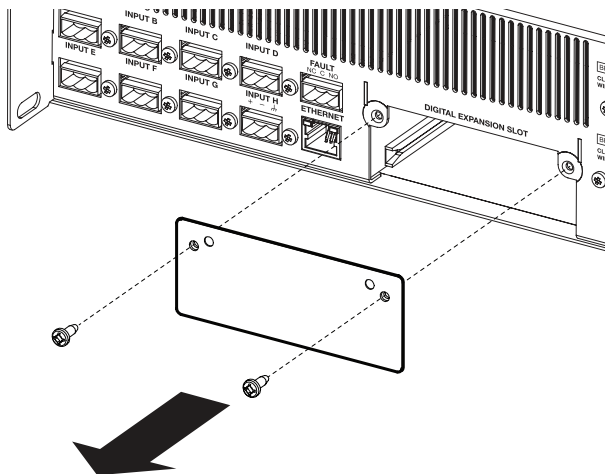

3. Align the Dante card with the plastic card guides in the open slot. Insert the card until the rear panel is flush with the amplifier.

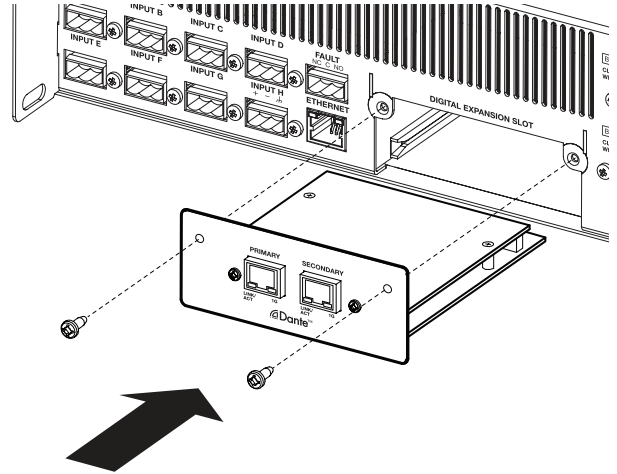


4. Secure the card in the slot using the 2 cover screws removed earlier.
5. Plug in the power cord and turn on the PowerMatch amplifier.
6. Using the front panel, navigate to the **FIRMWARE VERSION** screen (**MAIN MENU > UTILITY > FIRMWARE VERSION**).
7. Confirm that the installed Dante card is identified in the LCD screen:



8. If the card does not appear in the FIRMWARE VERSION screen, repeat Steps 1-7. Be sure that the card is completely pushed into the slot, and that the card is properly aligned with the card guides.

To obtain the Third-Party Software License Disclosure for this product:

1. Using ControlSpace Designer software, determine the IP address of the Dante network card.
2. Type the IP address into any browser. The response should look like the following example.

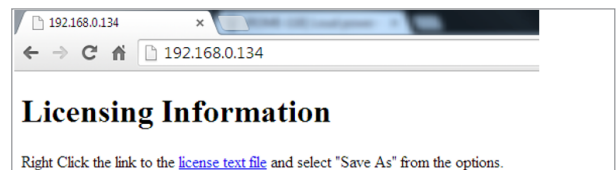

3. To read the file in the browser, click **license text file**. To save the file to your PC, right-click **license text file** and select the **Save link as...** option.



626033-0040